


# GOSUB and Subroutines in Commodore BASIC



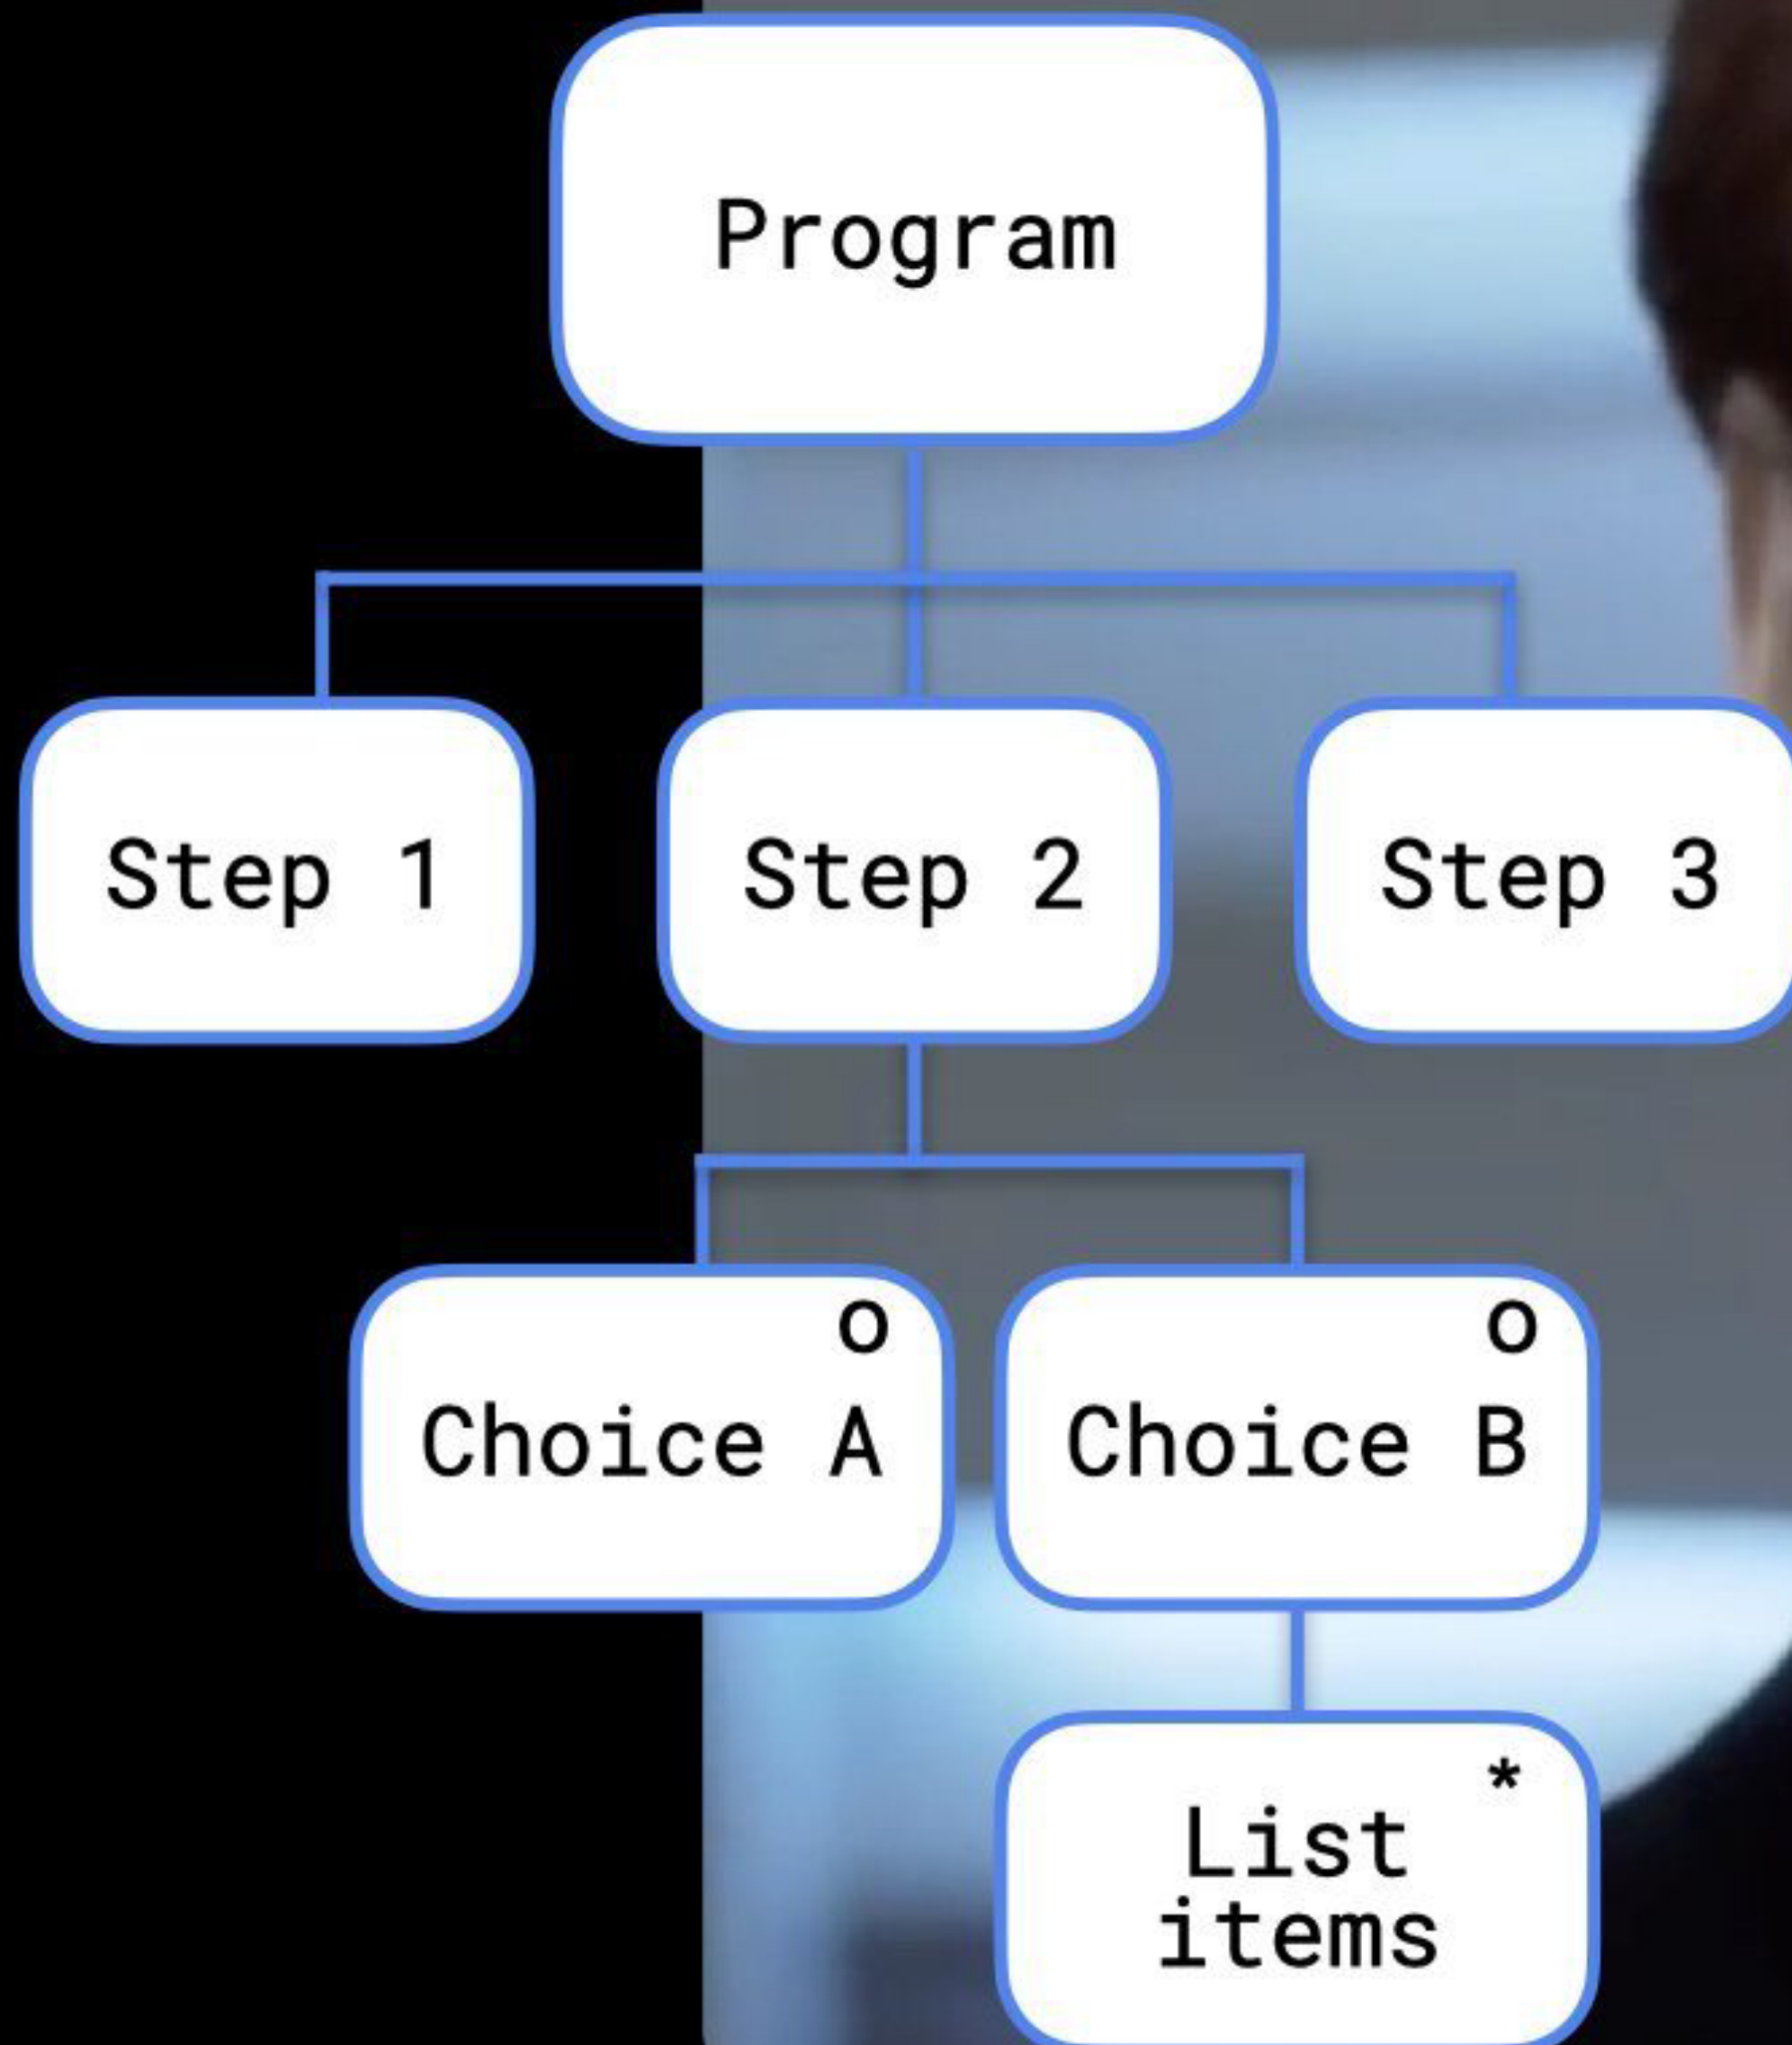

const

MaxAttributes = 8;

type

TPCharArray = array

PPCharArray = ^TPC

PPrinterCodes = ^T

TPrinterCodes = re

{ Number of pr

PreambleCount: B

{ Pointer to a

this printer

Preamble: PPChar

{ Pointer to a

changing the

CodeArray: PPCha

{ Array of indexes into the CodeArray corresponing to attributes

supported for this printer. }

Attributes: array[0..MaxAttributes - 1] of Byte;

{ Codes sent at the start of a page. }

75:1

[■] About

Turbo Pascal

Version 7.0

Copyright (c) 1983,92 by  
Borland International, Inc.

OK