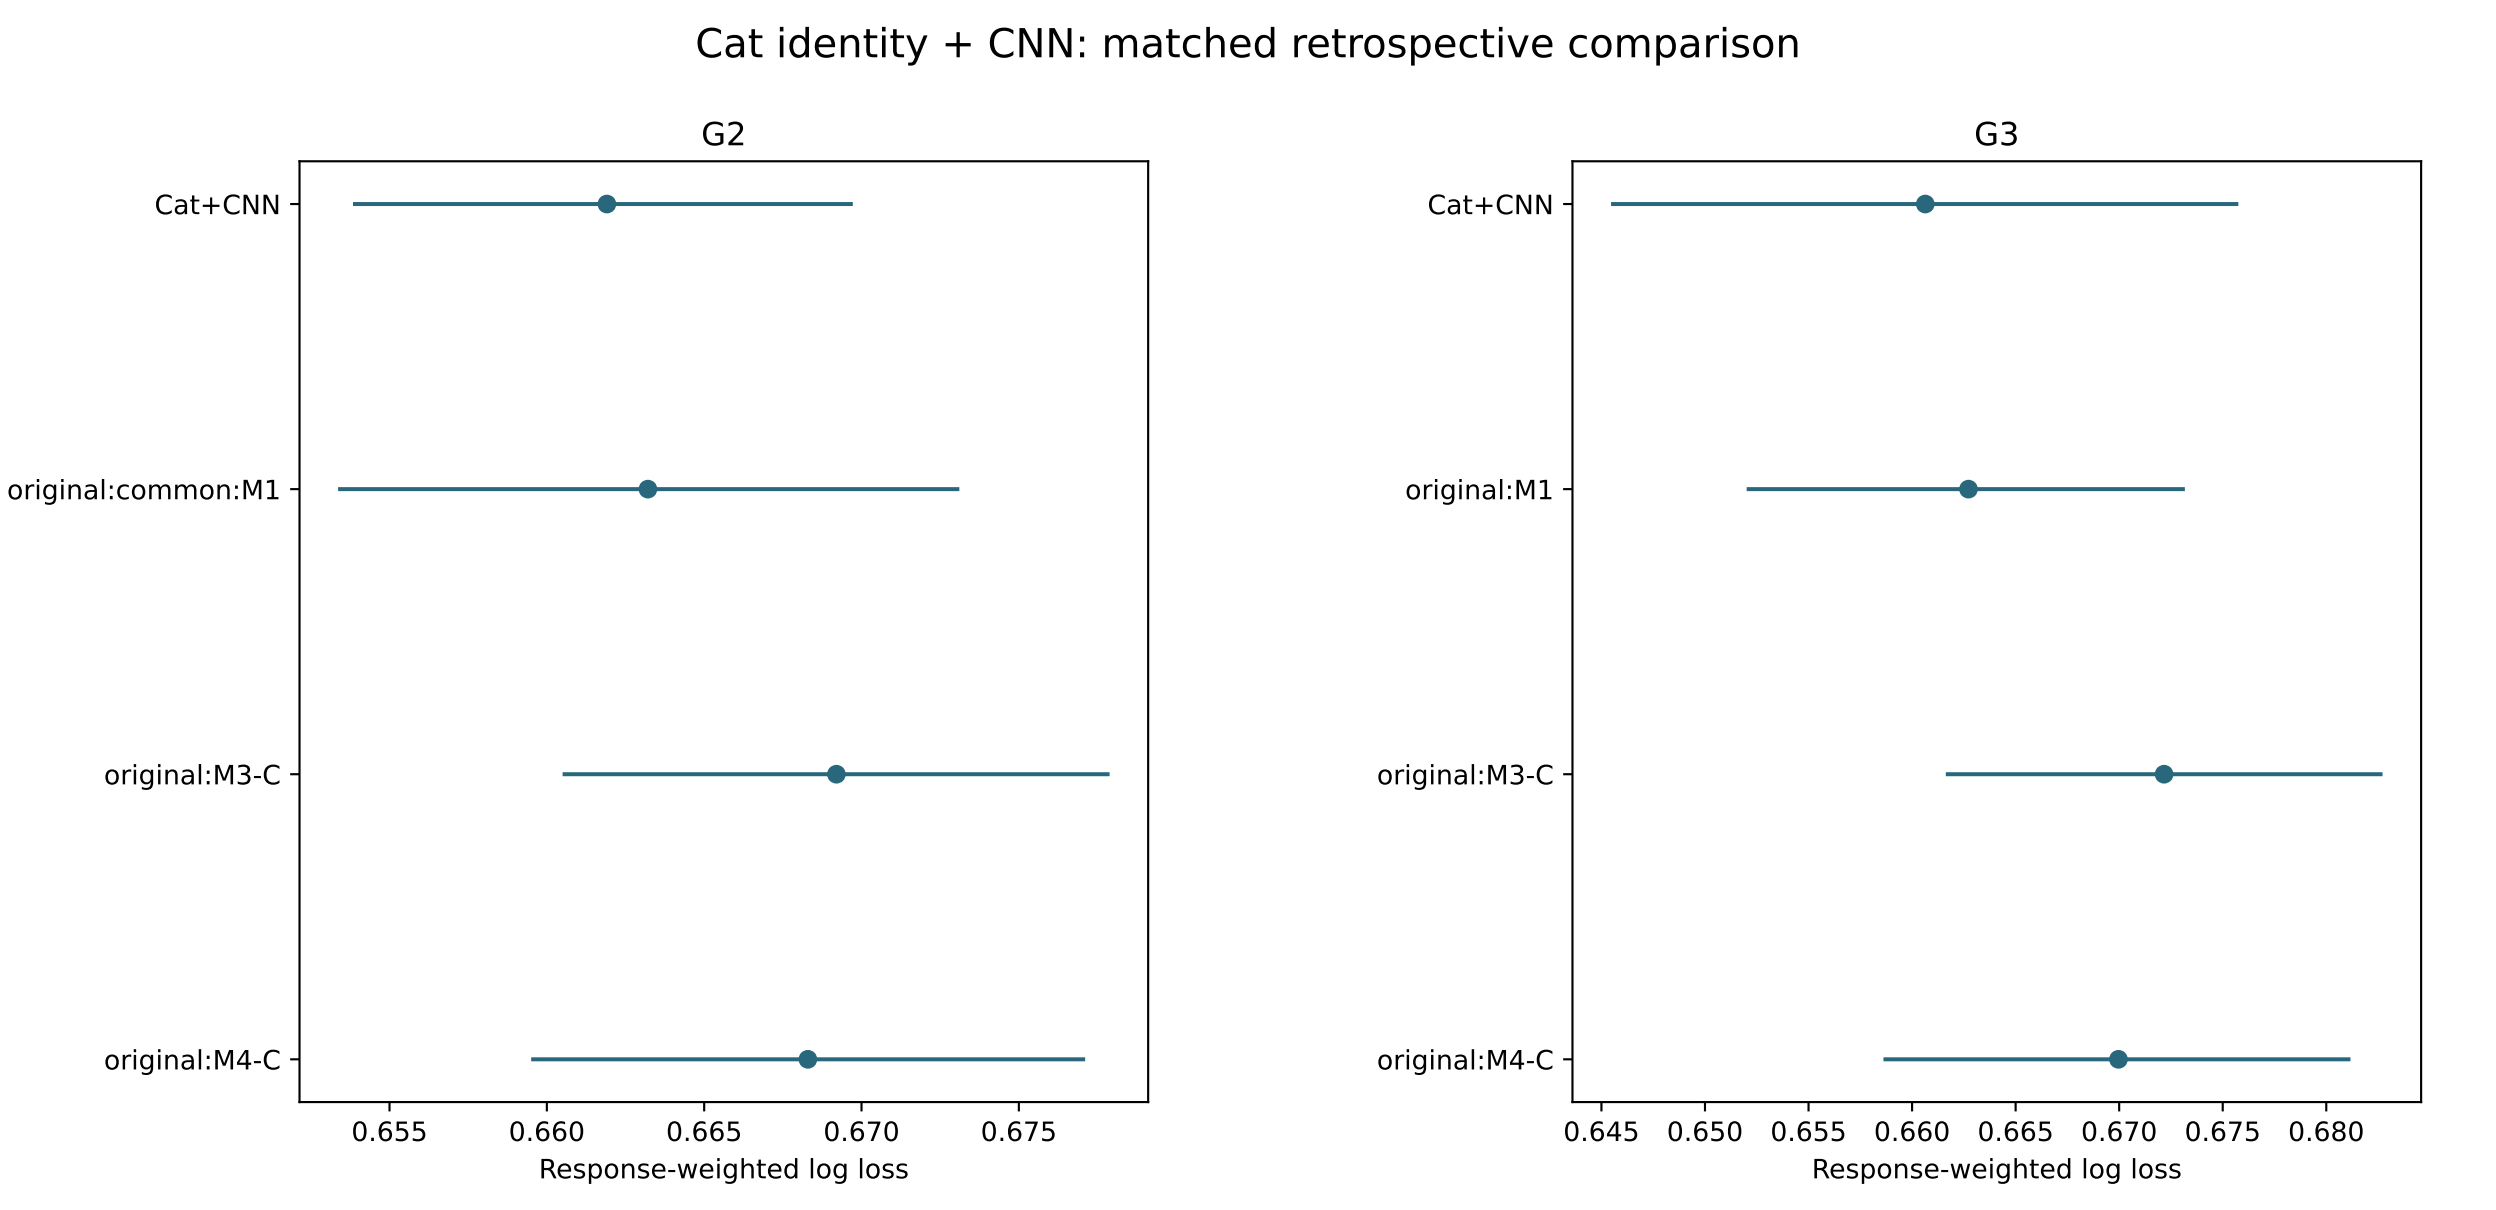

G4 unsupported by user choice. Pointwise intervals: G2 pair, G3 held-out photo.

Post-test exploratory, not causal or independent; comparisons with M4-C also change context.

Fit-only preprocessing; 1,836 common validation responses

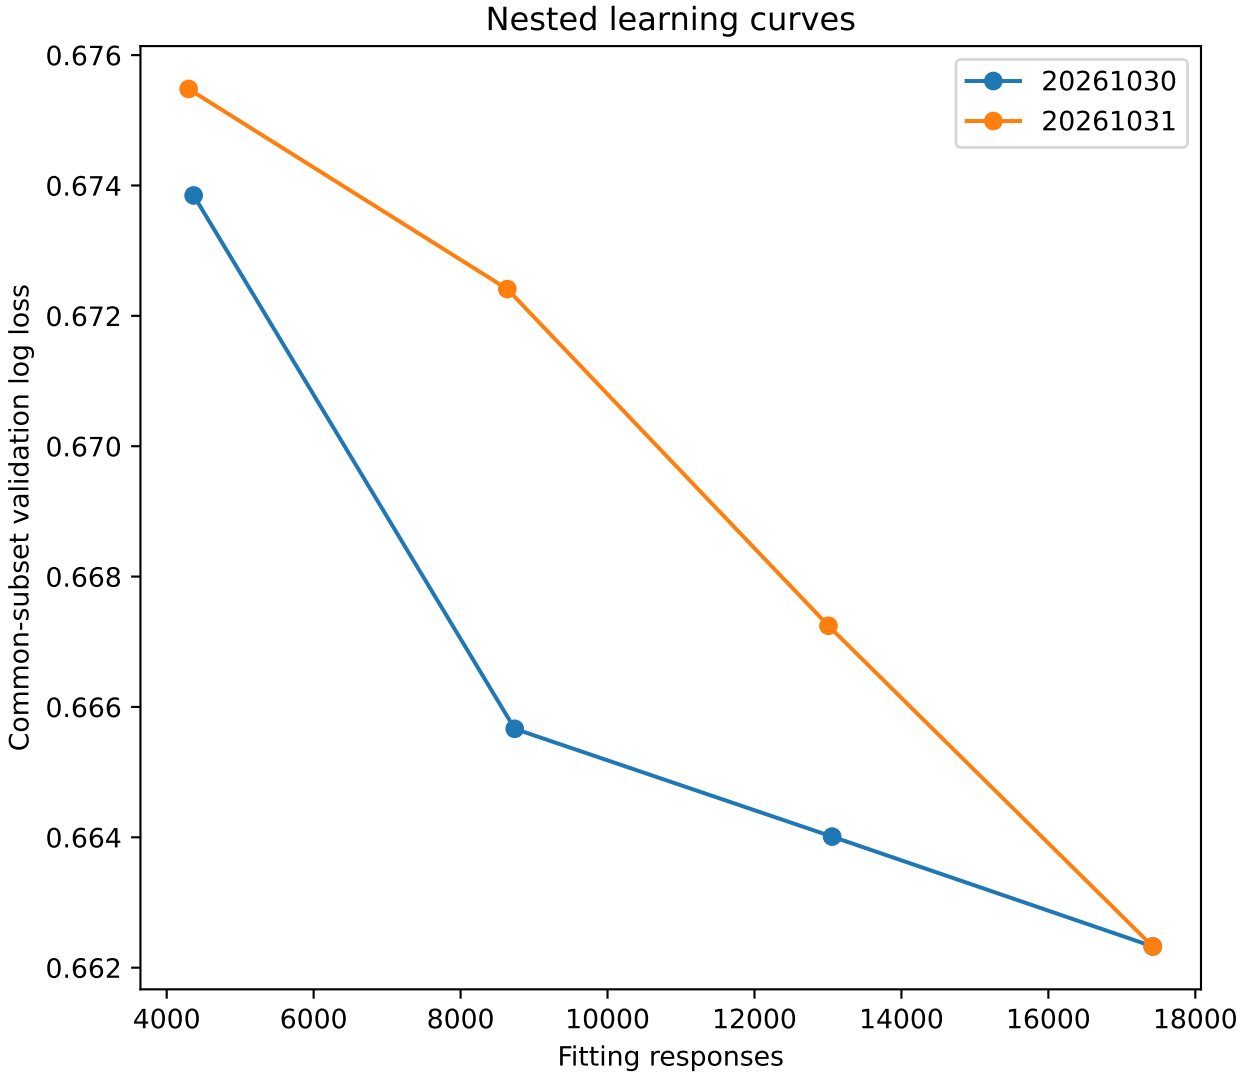

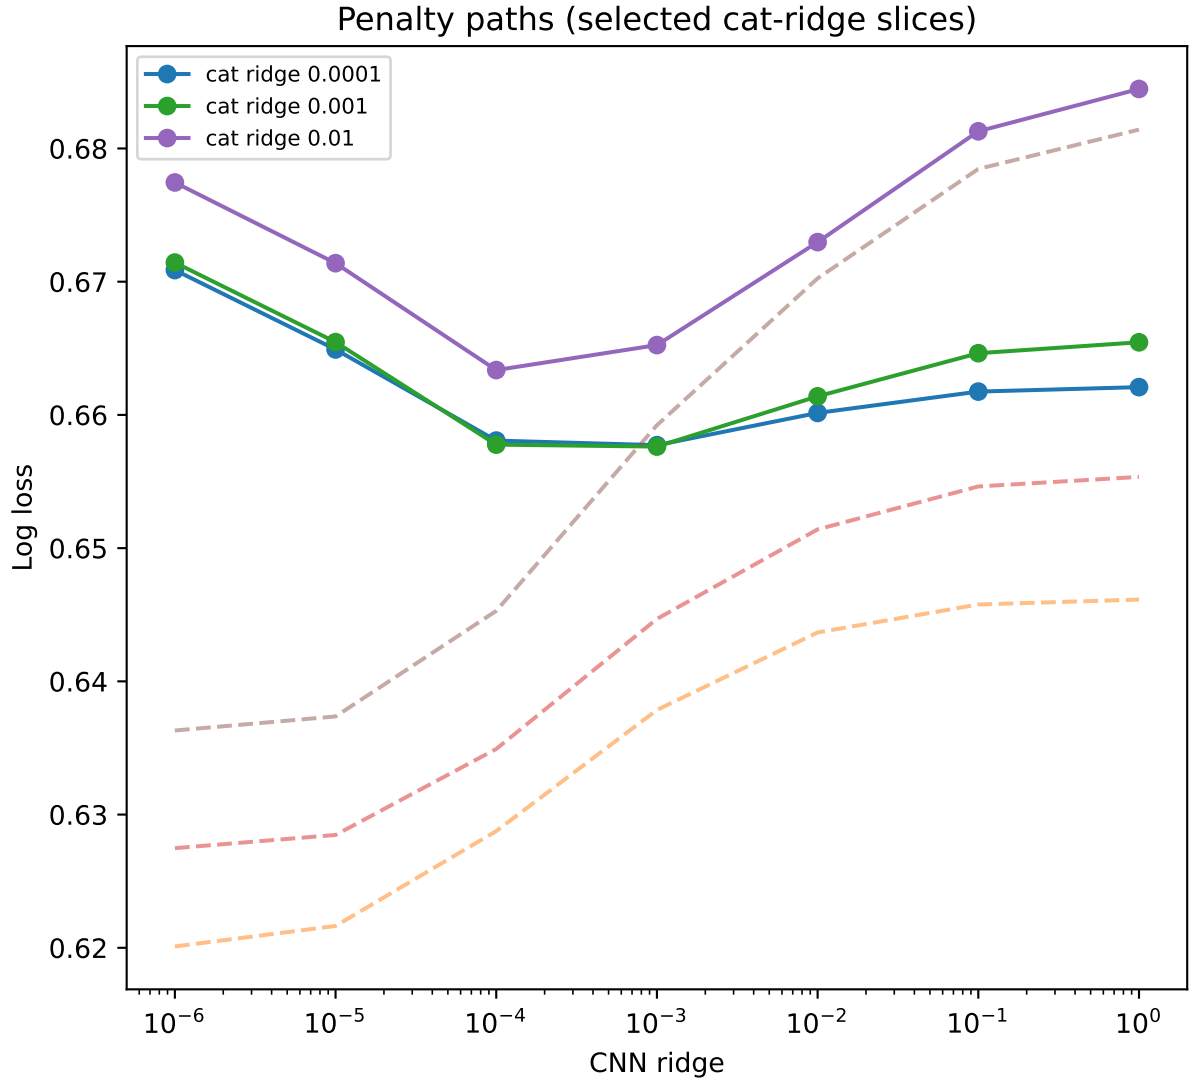

Full 7×7 grid is recorded; 100% seed populations coincide.

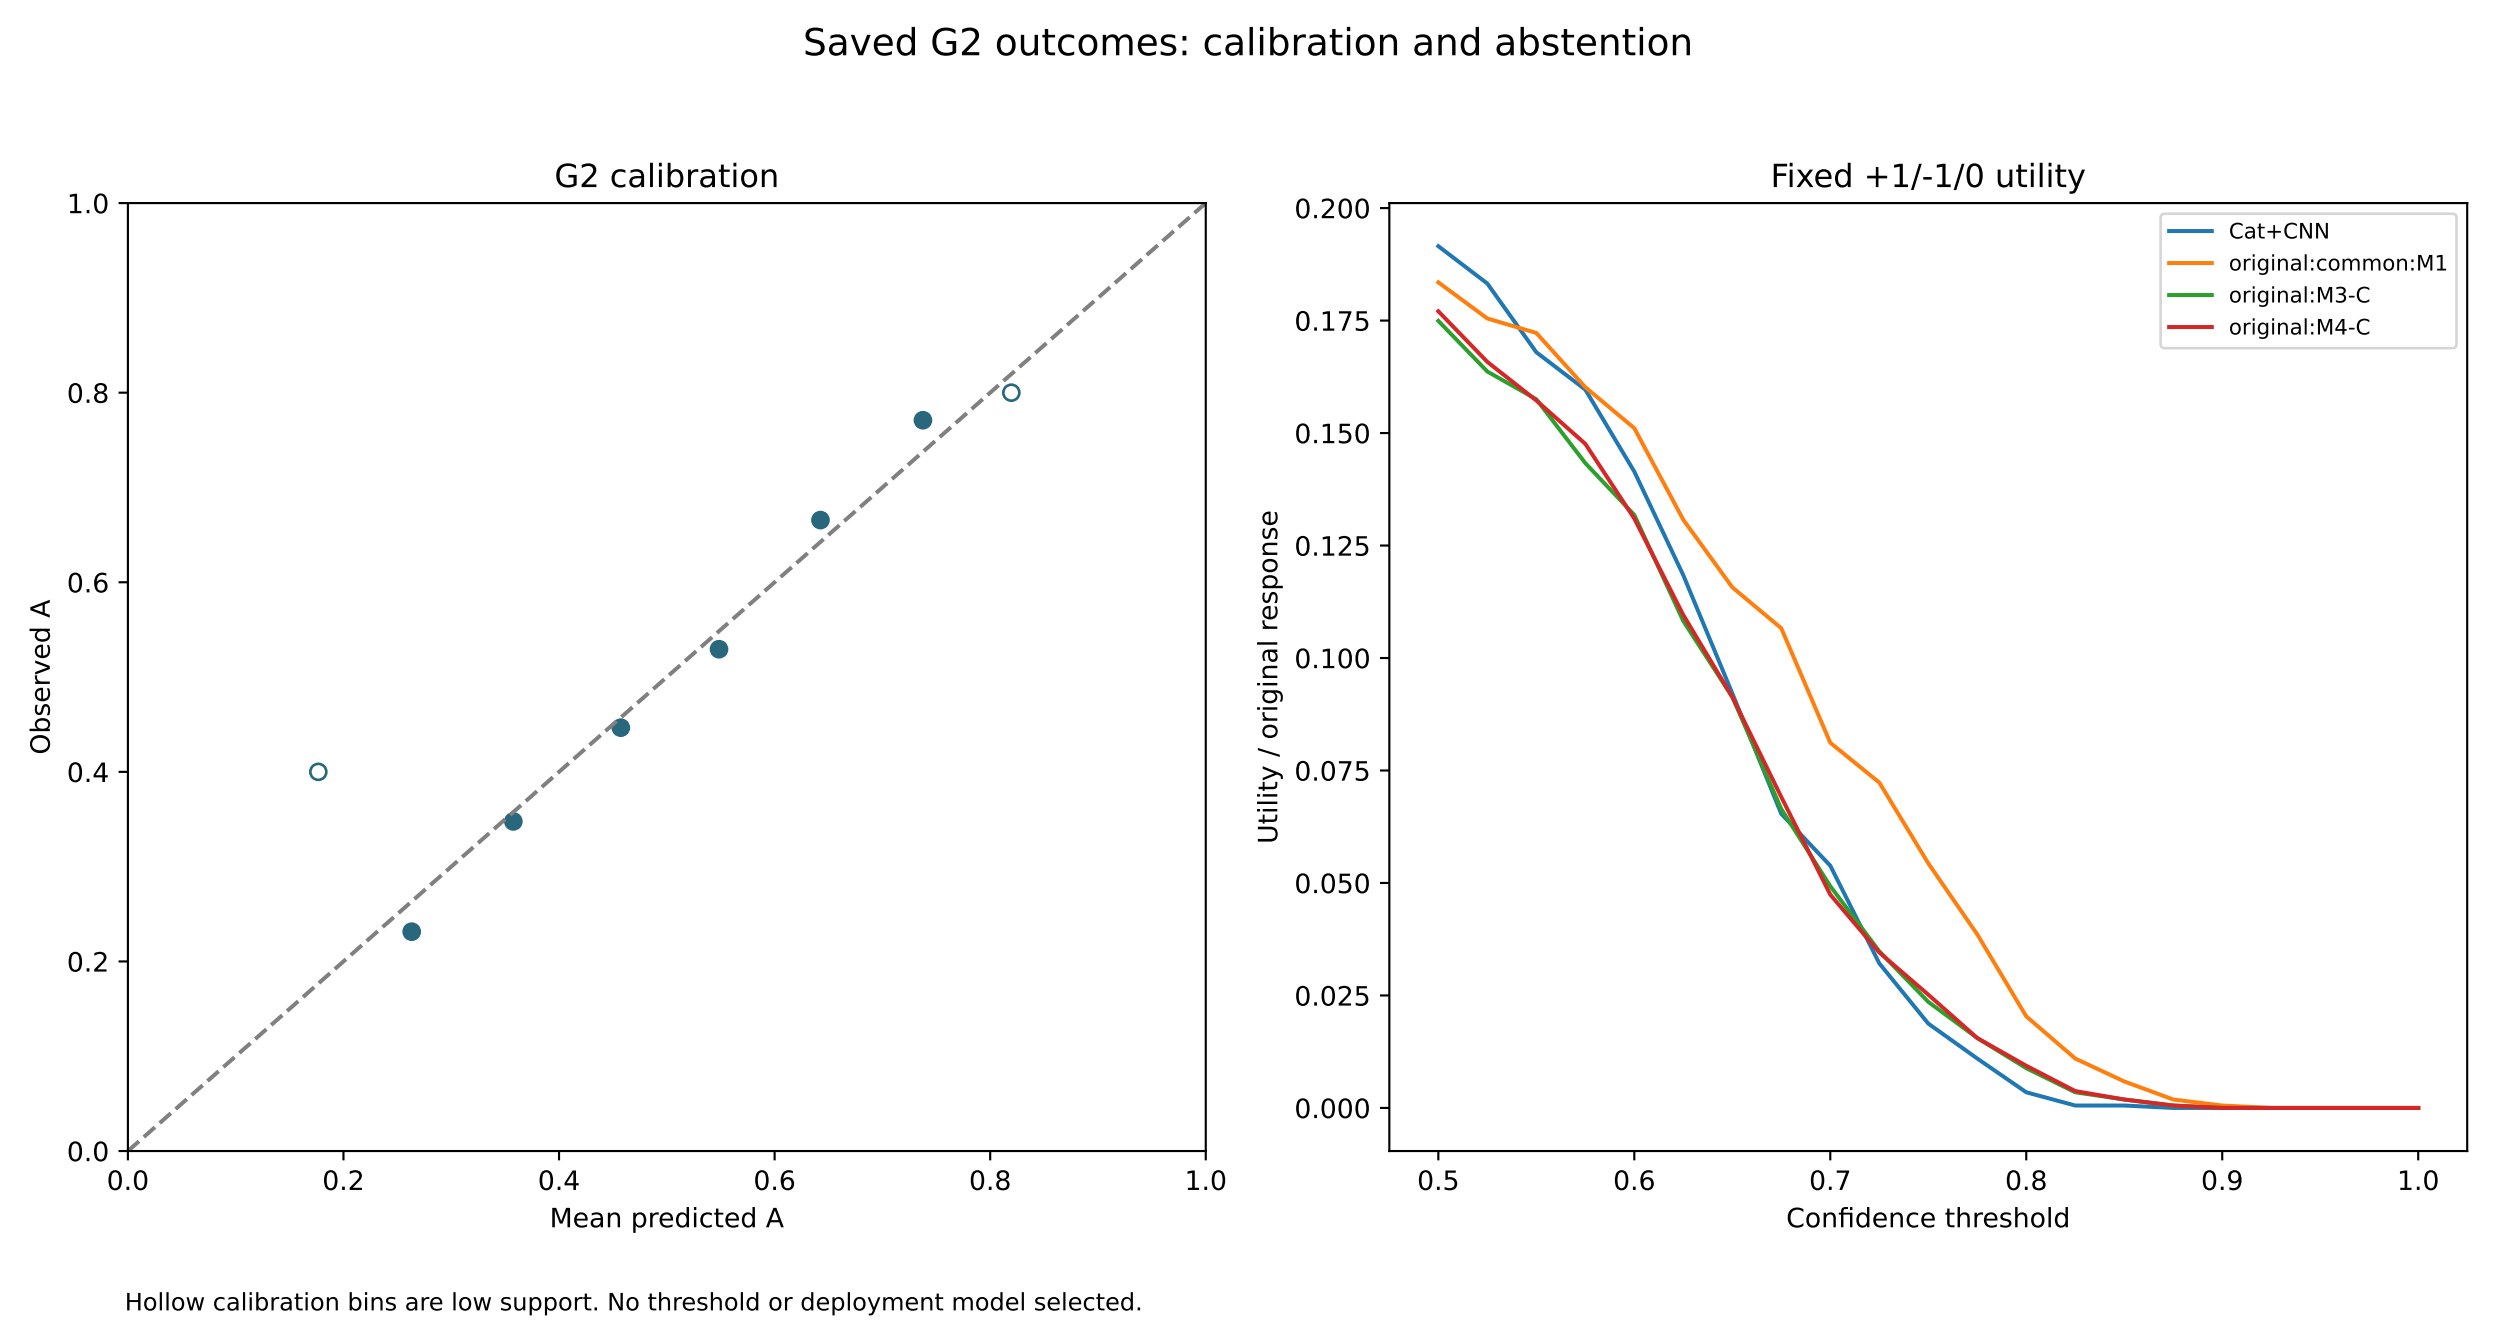
Saved G2 outcomes: calibration and abstention
G2 calibration
Observed A
Mean predicted A
0.0
0.2
0.4
0.6
0.8
1.0
Fixed +1/-1/0 utility
Utility / original response
Confidence threshold
0.000
0.025
0.050
0.075
0.100
0.125
0.150
0.175
0.200
0.5
0.6
0.7
0.8
0.9
1.0
Cat+CNN
original:common:M1
original:M3-C
original:M4-C
Hollow calibration bins are low support. No threshold or deployment model selected.

Interpretation and safeguards

- Predictive association, not causal effect.

- All G2/G3 outcomes were previously exposed; no independent confirmation.

- Cat and CNN coefficients depend on penalties; do not treat as a causal decomposition.

- G3 uses separate fitting and validation; G4 is unsupported by explicit user choice.

- 95% pointwise intervals are unadjusted and omit some respondent/shared-image dependence.

- No original claim, model, report, package or official prediction was changed.