

Structured Query Language (SQL)

Ordering, NULL Handling, Pattern Matching, UPDATE / DELETE and Aggregate Functions

Sample Table Used Throughout This Document

All examples and practice questions in this document are based on the following table, STUDENT, Rows shown as NULL indicate that no value has been entered for that student.

Table: STUDENT (RollNo, Name, Stream, Grade, Marks, City)

RollNo	Name	Stream	Grade	Marks	City
101	Aarav Sharma	Science	A	92	Delhi
102	Bhavya Singh	Commerce	B	78	Mumbai
103	Chirag Mehta	Science	NULL	NULL	Delhi
104	Divya Kapoor	Humanities	A	88	NULL
105	Esha Verma	Commerce	C	65	Pune
106	Farhan Ali	Science	B	NULL	Mumbai
107	Gauri Nair	Humanities	A	95	Chennai
108	Harsh Patel	Commerce	NULL	70	NULL
109	Isha Reddy	Science	A	91	Hyderabad
110	Jatin Malhotra	Humanities	B	60	Delhi

1. ORDER BY Clause

Learning Objective: To arrange (sort) the rows of a query result in ascending or descending order.

Understanding the Concept

- ORDER BY is used with the SELECT statement to display the output in a sorted manner.
- Sorting can be done on one or more columns.
- By default, sorting is done in ascending order (ASC). To sort in descending order, the keyword DESC must be written after the column name.
- When more than one column is given, sorting is done on the first column; rows with the same value in the first column are then sorted on the second column, and so on.

- ORDER BY is always written as the LAST clause of a SELECT statement.

Syntax

```
SELECT column1, column2, ...
FROM table_name
[WHERE condition]
ORDER BY column1 [ASC|DESC], column2 [ASC|DESC], ...;
```

Example


To display the Name and Marks of all students in descending order of Marks:

```
SELECT Name, Marks
FROM STUDENT
ORDER BY Marks DESC;
```

Output (NULL values are listed first when sorting in MySQL):

Name	Marks
Chirag Mehta	<i>NULL</i>
Farhan Ali	<i>NULL</i>
Gauri Nair	95
Aarav Sharma	92
Isha Reddy	91
Divya Kapoor	88
Bhavya Singh	78
Harsh Patel	70
Esha Verma	65
Jatin Malhotra	60

Mind Map

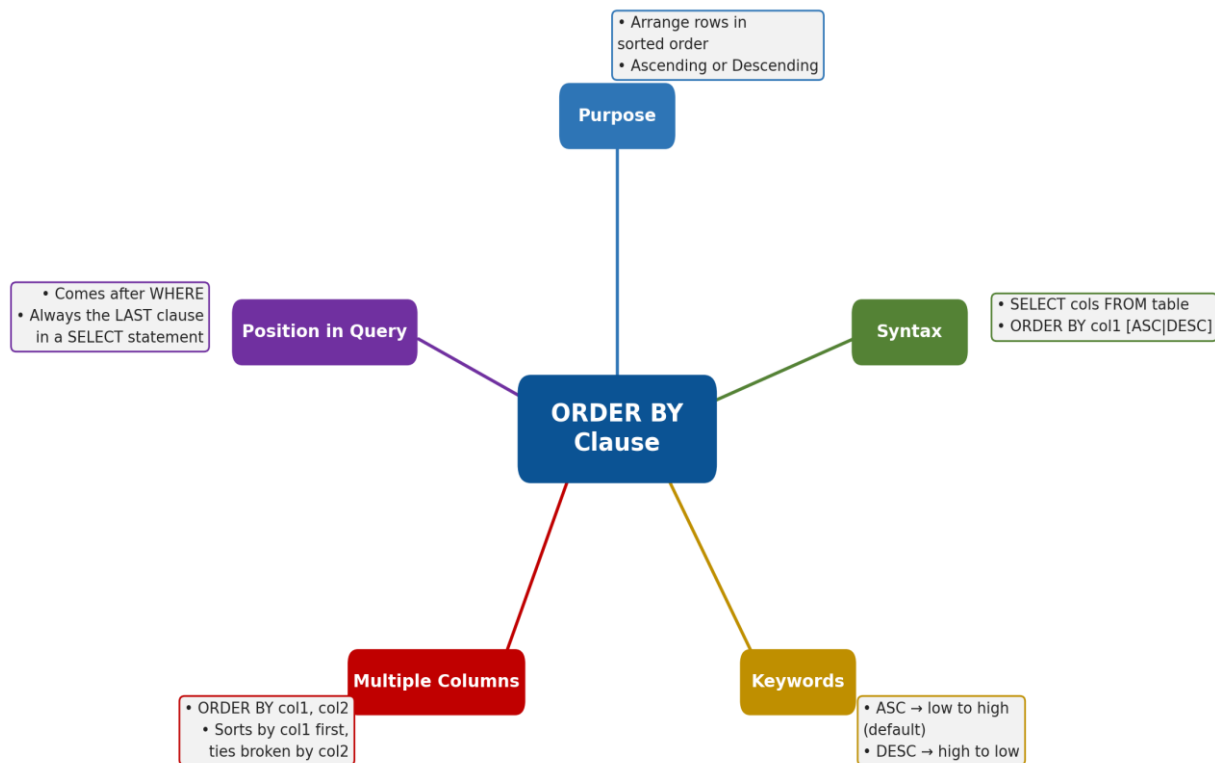

Practice Questions

Q1. Which clause of the `SELECT` statement is used to arrange output in ascending or descending order? (1 mark)

Q2. What is the default sorting order of the `ORDER BY` clause? (1 mark)

Q3. To display records in descending order of Marks, the _____ keyword must be written after the column name. (1 mark)

Q4. Write an SQL query to display Name and Marks of all students in descending order of Marks. (2 marks)

Q5. Write an SQL query to display all details of students in ascending order of Stream, and within each Stream in descending order of Marks. (2 marks)

Q6. Using the `STUDENT` table given above, write the output of:
`SELECT Name, City FROM STUDENT ORDER BY City;` (2 marks)

Q7. Using the `STUDENT` table, write the output of:
`SELECT Name, Marks FROM STUDENT ORDER BY Marks;` (3 marks)

Q8. Which of the following is TRUE about the `ORDER BY` clause?

- (a) It can only be used with the `WHERE` clause
- (b) Its default order is ascending
- (c) It must come before the `WHERE` clause
- (d) It permanently sorts data in the table (1 mark)

Q9. Write an SQL query to display Name and Grade of students sorted in ascending order of Grade. (2 marks)

Answers

A1. ORDER BY clause.

A2. Ascending order (ASC).

A3. DESC

A4. SELECT Name, Marks FROM STUDENT ORDER BY Marks DESC;

A5. SELECT * FROM STUDENT ORDER BY Stream ASC, Marks DESC;

A6.

Name	City
Divya Kapoor	NULL
Harsh Patel	NULL
Gauri Nair	Chennai
Aarav Sharma	Delhi
Jatin Malhotra	Delhi
Isha Reddy	Hyderabad
Bhavya Singh	Mumbai
Farhan Ali	Mumbai
Esha Verma	Pune

(NULL values are displayed first in ascending order).

A7.

Name	Marks
Chirag Mehta	NULL
Farhan Ali	NULL
Jatin Malhotra	60
Esha Verma	65
Harsh Patel	70
Bhavya Singh	78
Divya Kapoor	88
Isha Reddy	91
Aarav Sharma	92
Gauri Nair	95

A8. (b) Its default order is ascending.

A9. SELECT Name, Grade FROM STUDENT ORDER BY Grade;

2. Meaning of NULL

Learning Objective: To understand what a NULL value represents in a database table.

Understanding the Concept

- NULL represents a missing, unknown, or inapplicable value in a table — it is a placeholder for "no value was stored", not an actual value itself.
- NULL is NOT the same as the number 0, and it is NOT the same as a blank space (' ') — both 0 and space are actual stored values, whereas NULL means nothing was stored at all.
- A column can contain NULL only if it does not have a NOT NULL constraint applied to it.
- Any arithmetic operation performed with NULL always results in NULL (e.g., 10 + NULL gives NULL), because an unknown value combined with any value remains unknown.
- Any comparison made with NULL using =, <>, <, > etc. does not evaluate to TRUE or FALSE — it evaluates to UNKNOWN. This is why the special operators IS NULL and IS NOT NULL are needed.

Syntax

```
-- NULL has no special syntax of its own.  
-- It appears when no value is supplied for a column, e.g.:  
INSERT INTO STUDENT (RollNo, Name, Marks)  
VALUES (111, 'Kabir Joshi', NULL);
```

Example


In the STUDENT table above, the Marks of Chirag Mehta (RollNo 103) and Farhan Ali (RollNo 106) have not been entered, so they are stored as NULL — not as 0.

```
SELECT Name, Marks FROM STUDENT;
```

Notice how NULL is displayed as an empty / NULL marker, different from an actual 0:

Name	Marks
Aarav Sharma	92
Chirag Mehta	<i>NULL</i>
Farhan Ali	<i>NULL</i>

Mind Map

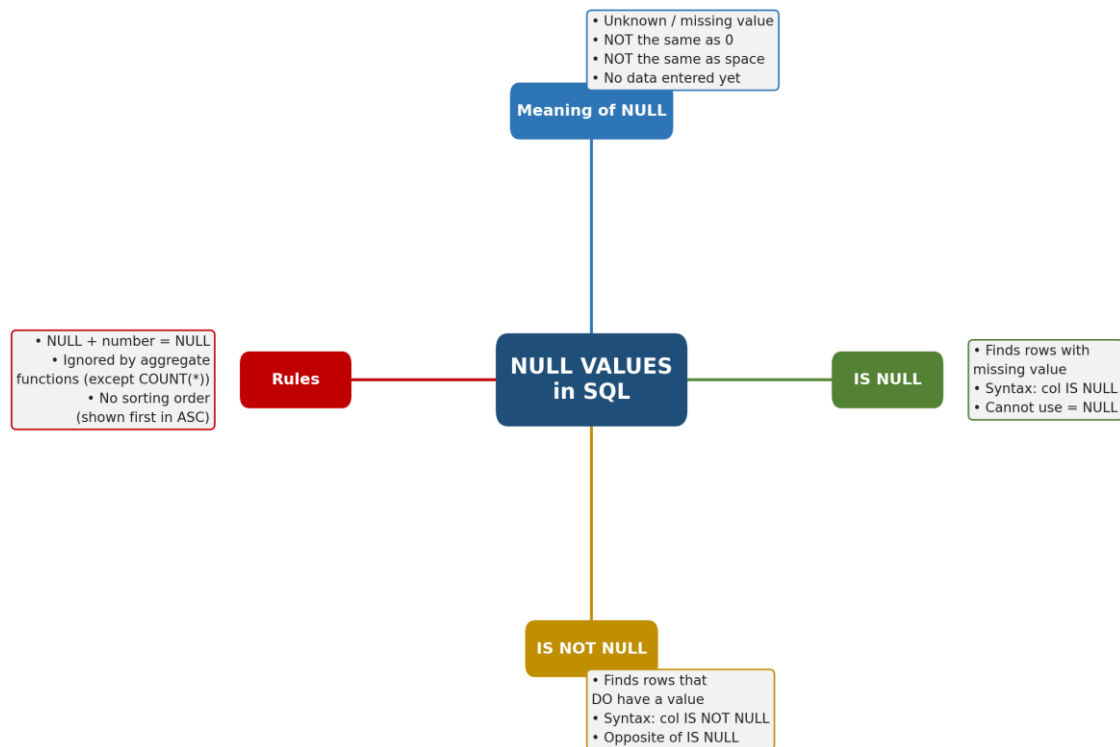

Practice Questions

Q1. What is a NULL value in SQL? (1 mark)

Q2. NULL and 0 (zero) are the same in SQL. State True or False. (1 mark)

Q3. Give one situation where a NULL value may occur in a table. (1 mark)

Q4. What will be the result of the expression $10 + \text{NULL}$? Justify your answer. (2 marks)

Q5. Differentiate between NULL and a blank space (' ') with a suitable example. (2 marks)

Q6. Why can we not use the condition "Marks = NULL" to find rows with missing marks? (2 marks)

Q7. A NULL value is different from a value of _____ and from a string of _____. (1 mark)

Q8. Can NULL be used directly in logical comparisons such as =, <, >? Explain briefly. (2 marks)

Q9. A column Grade of table STUDENT has no value entered for a few rows. Ridhima says, "these rows have Grade = ' ' (a blank space)". Do you agree with her? Give a reason, and write the correct SQL query to display rows with missing Grade values. (3 marks)

Q10. Which of these values is equivalent to NULL?

- (a) 0
- (b) '0'
- (c) ' ' (a blank space)
- (d) None of these (1 mark)

Answers

A1. NULL represents a missing, unknown, or inapplicable value; it is not the same as zero or a blank space.

A2. False.

A3. When a value for a column is not known or not entered at the time of data entry (e.g., Marks not yet declared for a student), provided the column allows NULL values.

A4. The result will be NULL, because any arithmetic operation involving NULL results in NULL (an unknown value combined with anything remains unknown).

A5. NULL means the absence of any value (nothing is stored); a blank space is an actual character value stored in the column. E.g., Name = " " has an empty string stored, while Name = NULL means no value is stored at all.

A6. Because NULL is unknown; comparing anything using = with NULL (even NULL = NULL) evaluates to UNKNOWN, not TRUE. So this condition never selects any rows — IS NULL must be used instead.

A7. zero (0); blank / spaces

A8. NULL can appear in such comparisons, but the result is always UNKNOWN, never TRUE or FALSE. Hence special operators IS NULL / IS NOT NULL are required to test for NULL.

A9. No, an unentered value is stored as NULL, not as a blank space. Correct query: SELECT * FROM STUDENT WHERE Grade IS NULL;

A10. (d) None of these.

3. IS NULL

Learning Objective: To search and display rows in which a given column has a missing (NULL) value.

Understanding the Concept

- IS NULL is a logical operator used in the WHERE clause to test whether a column's value is NULL (missing/unknown).
- It is written after the column name: column_name IS NULL.
- IS NULL must be used instead of "= NULL", because NULL cannot be tested using the equality operator.
- It can be combined with other conditions using AND / OR / NOT, just like any other condition.

Syntax

```
SELECT column_list  
FROM table_name  
WHERE column_name IS NULL;
```

Example

To display the Name and RollNo of students whose Marks have not been entered:

```
SELECT RollNo, Name  
FROM STUDENT  
WHERE Marks IS NULL;
```

Output:

RollNo	Name
103	Chirag Mehta
106	Farhan Ali

Practice Questions

Q1. What is the purpose of the IS NULL operator? (1 mark)

Q2. To display rows where City has not been entered, the condition used is City _____. (1 mark)

Q3. Write an SQL query to display the Name and RollNo of students whose Marks have not been entered. (2 marks)

Q4. Write an SQL query to display all details of students whose Grade is missing. (2 marks)

Q5. Which operator is used to check for NULL values in a column?

(a) =

(b) IS NULL

- (c) LIKE
(d) IN (1 mark)

Q6. Using the STUDENT table, write the output of:
SELECT Name FROM STUDENT WHERE City IS NULL; (2 marks)

Q7. What will be the output of "SELECT * FROM STUDENT WHERE Marks = NULL;"? Explain why. (2 marks)

Q8. Write an SQL query to count how many students have not been assigned a City. (2 marks)

Q9. Ms Rao, the class teacher, wants a list of students whose Grade has not yet been entered, along with their Marks, sorted in descending order of Marks. Write the SQL query for this. (3 marks)

Q10. The IS NULL condition can be combined with other conditions using AND / OR. State True or False. (1 mark)

Answers

A1. It is used to test / select rows where a column's value is NULL (missing or unknown).

A2. IS NULL

A3. SELECT RollNo, Name FROM STUDENT WHERE Marks IS NULL;

A4. SELECT * FROM STUDENT WHERE Grade IS NULL;

A5. (b) IS NULL

A6.

Name
Divya Kapoor
Harsh Patel

A7. No rows will be displayed (an empty result set), because the condition "= NULL" never evaluates to TRUE. IS NULL should be used instead.

A8. SELECT COUNT(*) FROM STUDENT WHERE City IS NULL;

A9. SELECT Name, Marks FROM STUDENT WHERE Grade IS NULL ORDER BY Marks DESC;

A10. True.

4. IS NOT NULL

Learning Objective: To search and display rows in which a given column has a value present (not missing).

Understanding the Concept

- IS NOT NULL is the exact opposite of IS NULL — it selects rows where the column value IS present (not missing).
- It is written as: column_name IS NOT NULL.
- It is commonly used when we want to work only with complete/valid data, ignoring rows with missing values.
- Like IS NULL, it can be combined with AND / OR / NOT along with other conditions.

Syntax

```
SELECT column_list  
FROM table_name  
WHERE column_name IS NOT NULL;
```

Example

To display Name and Marks of students whose Marks ARE entered, in ascending order of Marks:

```
SELECT Name, Marks  
FROM STUDENT  
WHERE Marks IS NOT NULL  
ORDER BY Marks;
```

Output:

Name	Marks
Jatin Malhotra	60
Esha Verma	65
Harsh Patel	70
Bhavya Singh	78
Divya Kapoor	88
Isha Reddy	91
Aarav Sharma	92
Gauri Nair	95

Practice Questions

Q1. What is the purpose of the IS NOT NULL operator? (1 mark)

Q2. To display students whose Marks have been entered, the condition used is Marks _____. (1 mark)

Q3. Write an SQL query to display Name and Marks of students whose Marks are available, in ascending order of Marks. (2 marks)

Q4. Write an SQL query to display Name and City for those students whose City is known. (2 marks)

Q5. Using the STUDENT table, write the output of:
SELECT COUNT(*) FROM STUDENT WHERE Grade IS NOT NULL; (2 marks)

Q6. IS NOT NULL is the exact opposite of:

- (a) LIKE
- (b) IS NULL
- (c) BETWEEN
- (d) IN (1 mark)

Q7. Write an SQL query to display details of students who belong to the 'Science' stream and whose Marks are not missing. (2 marks)

Q8. Differentiate between IS NULL and IS NOT NULL with one example each. (2 marks)

Q9. The school wants the average marks of only those students whose marks have actually been recorded. Write an SQL query using IS NOT NULL to display this. (3 marks)

Q10. IS NOT NULL can be used together with other conditions joined by AND / OR. State True or False. (1 mark)

Answers

A1. It is used to display/select rows where a column has a value present (i.e., not missing).

A2. IS NOT NULL

A3. SELECT Name, Marks FROM STUDENT WHERE Marks IS NOT NULL ORDER BY Marks;

A4. SELECT Name, City FROM STUDENT WHERE City IS NOT NULL;

A5. 8 (since 2 rows — RollNo 103 and 108 — have a NULL Grade, out of 10 total rows).

A6. (b) IS NULL

A7. SELECT * FROM STUDENT WHERE Stream = 'Science' AND Marks IS NOT NULL;

A8. IS NULL retrieves rows with missing values, e.g. WHERE Marks IS NULL; IS NOT NULL retrieves rows that have a value, e.g. WHERE Marks IS NOT NULL.

A9. SELECT AVG(Marks) FROM STUDENT WHERE Marks IS NOT NULL;

A10. True.

5. LIKE Operator

Learning Objective: To search for a specified pattern within a text/character column.

Understanding the Concept

- The LIKE operator is used in the WHERE clause for pattern matching on character/string type columns.
- Two wildcard characters are used with LIKE:
 - % (percent sign) — matches any sequence of zero or more characters.
 - _ (underscore) — matches exactly one character.
- 'A%' matches any value starting with A; '%A' matches any value ending with A; '%A%' matches any value containing A anywhere.
- NOT LIKE can be used to exclude values matching a given pattern.

Syntax

```
SELECT column_list  
FROM table_name  
WHERE column_name LIKE 'pattern';
```

Example


To display details of students whose Name starts with 'A':

```
SELECT Name  
FROM STUDENT  
WHERE Name LIKE 'A%';
```

Output:

Name
Aarav Sharma

Mind Map

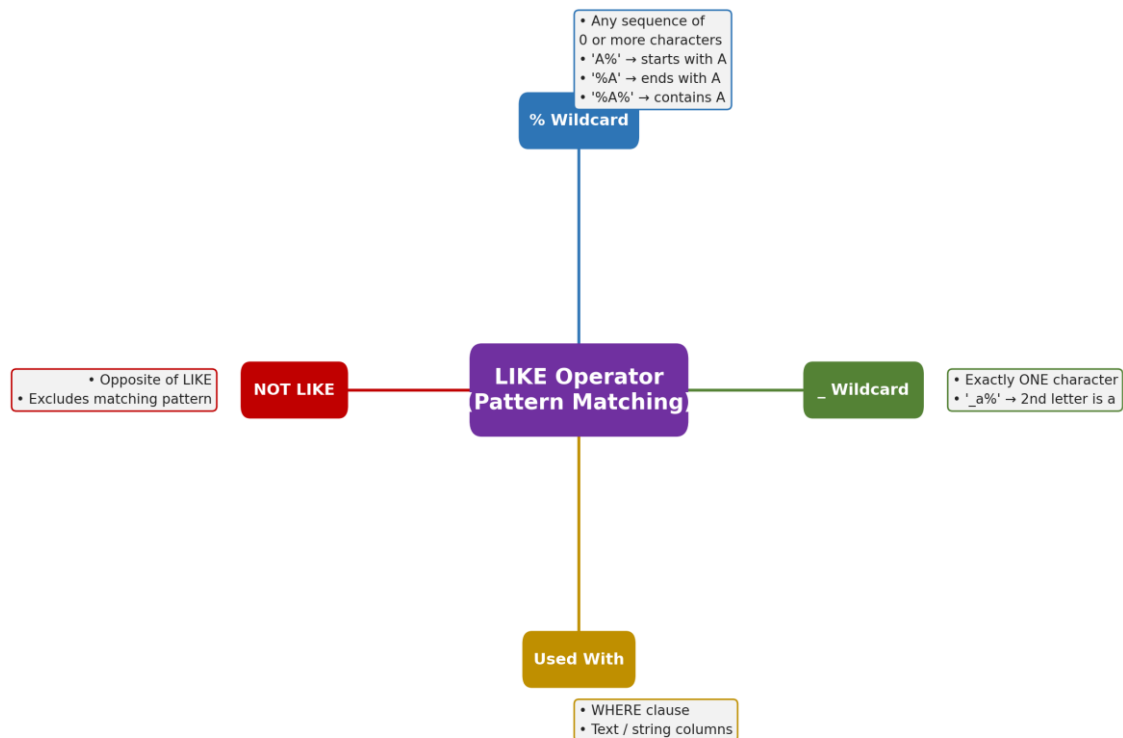

Practice Questions

Q1. What is the purpose of the LIKE operator in SQL? (1 mark)

Q2. Name the two wildcard characters used with the LIKE operator. (1 mark)

Q3. The % symbol represents _____ character(s), while the _ symbol represents _____ character. (1 mark)

Q4. Write an SQL query to display details of students whose Name starts with 'A'. (2 marks)

Q5. Write an SQL query to display the Name of students who have 'a' as the second letter of their Name. (2 marks)

Q6. Write an SQL query to display students whose City name ends with the letter 'i'. (2 marks)

Q7. Using the STUDENT table, write the output of:
SELECT Name FROM STUDENT WHERE Name LIKE '%a'; (2 marks)

Q8. Write an SQL query to display students whose Name does NOT start with 'A'. (2 marks)

Q9. Which wildcard character matches exactly one character in a LIKE pattern?

- (a) %
- (b) _
- (c) *
- (d) ? (1 mark)

Q10. The school office needs a list of students whose City name has exactly 6 characters and starts with the letter 'M'. Write an SQL query using LIKE with the underscore wildcard. (3 marks)

Answers

A1. It is used for pattern matching of string/character values in a WHERE clause.

A2. % (percent sign) and _ (underscore).

A3. any number of (zero or more); exactly one

A4. SELECT * FROM STUDENT WHERE Name LIKE 'A%';

A5. SELECT Name FROM STUDENT WHERE Name LIKE '_a%';

A6. SELECT * FROM STUDENT WHERE City LIKE '%i';

A7.

Name
Aarav Sharma
Chirag Mehta
Esha Verma
Jatin Malhotra

A8. SELECT * FROM STUDENT WHERE Name NOT LIKE 'A%';

A9. (b) _ (underscore)

A10. SELECT * FROM STUDENT WHERE City LIKE 'M_____'; (M followed by exactly five more characters, e.g. Mumbai)

6. UPDATE Command

Learning Objective: To modify / change the existing data already stored in a table.

Understanding the Concept

- UPDATE is a DML (Data Manipulation Language) command used to modify the value(s) of existing records in a table.
- The SET clause specifies the column(s) to be changed and their new value(s).
- The WHERE clause specifies which row(s) should be updated — it is optional, but extremely important.
- If the WHERE clause is omitted, ALL rows of the table get updated — this is a common and serious mistake, so the WHERE condition should always be checked carefully before running an UPDATE statement.
- More than one column can be updated in the same UPDATE statement by separating them with commas.

Syntax

```
UPDATE table_name  
SET column1 = value1, column2 = value2, ...  
WHERE condition;
```


Example

To change the City of the student with RollNo 104 to 'Delhi':

```
UPDATE STUDENT  
SET City = 'Delhi'  
WHERE RollNo = 104;
```

Effect: only the row with RollNo 104 is changed; City becomes 'Delhi' for Divya Kapoor. All other rows remain unaffected.

Mind Map

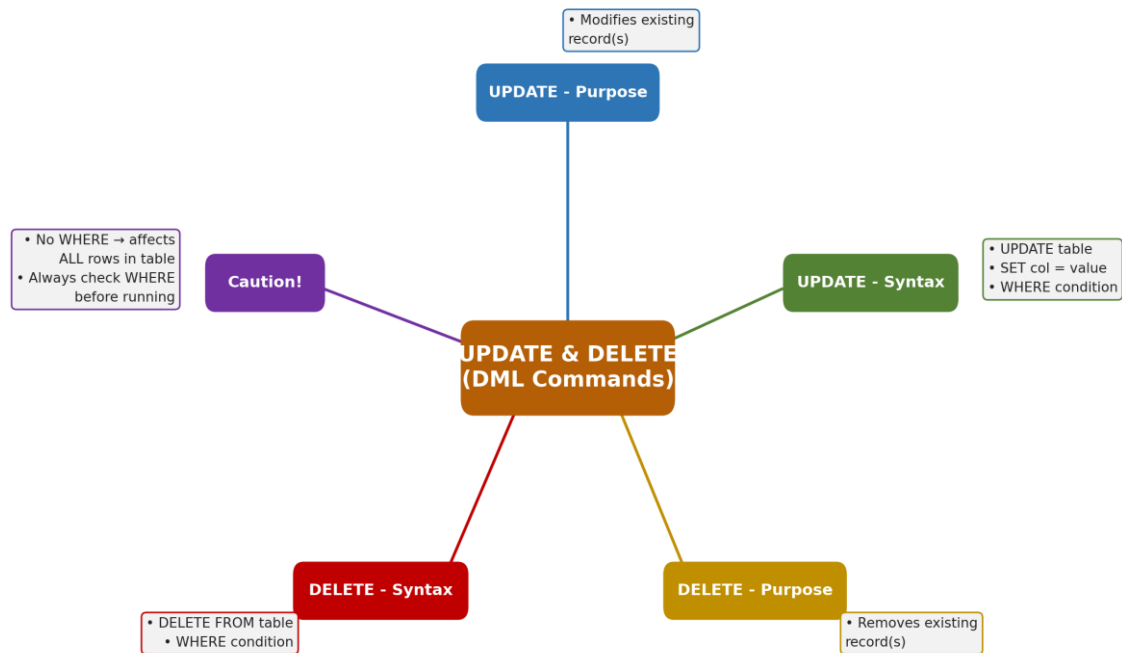

Practice Questions (CBSE Board Pattern)

Q1. Which SQL command is used to modify existing data already present in a table? (1 mark)

Q2. Name the clause used with the UPDATE command to specify the new value(s) of column(s). (1 mark)

Q3. If the WHERE clause is omitted in an UPDATE statement, then _____ rows of the table get updated. (1 mark)

Q4. Write an SQL query to change the City of the student with RollNo 104 to 'Delhi'. (2 marks)

Q5. Write an SQL query to increase the Marks by 5 for all students belonging to the 'Science' stream. (2 marks)

Q6. Write an SQL query to set Grade = 'A' for all students who scored Marks greater than 90. (2 marks)

Q7. Can more than one column be updated in a single UPDATE statement? Write an example that updates both Grade and Marks of the student with RollNo 108. (2 marks)

Q8. What will happen if the following statement is executed?
UPDATE STUDENT SET City = 'Delhi'; (2 marks)

Q9. The UPDATE command belongs to which category of SQL commands?

- (a) DDL
- (b) DML
- (c) DCL
- (d) TCL (1 mark)

Q10. The student with RollNo 106 was absent earlier and has now scored 82 marks with Grade 'A'. Write a single SQL statement to update both the Marks and Grade for this student. (3 marks)

Answers

A1. The UPDATE command.

A2. The SET clause.

A3. all

A4. UPDATE STUDENT SET City = 'Delhi' WHERE RollNo = 104;

A5. UPDATE STUDENT SET Marks = Marks + 5 WHERE Stream = 'Science';

A6. UPDATE STUDENT SET Grade = 'A' WHERE Marks > 90;

A7. Yes. Example: UPDATE STUDENT SET Grade = 'B', Marks = 70 WHERE RollNo = 108;

A8. Since there is no WHERE clause, the City column of ALL rows in the STUDENT table will be updated to 'Delhi'.

A9. (b) DML (Data Manipulation Language)

A10. UPDATE STUDENT SET Marks = 82, Grade = 'A' WHERE RollNo = 106;

7. DELETE Command

Learning Objective: To remove existing record(s)/row(s) from a table.

Understanding the Concept

- DELETE is a DML command used to remove one or more existing rows (records) from a table.
- It removes entire rows, not individual columns — to remove a column, the DDL command ALTER TABLE...DROP COLUMN is used instead.
- The WHERE clause specifies which row(s) are to be deleted; it is optional but very important.
- If the WHERE clause is omitted, ALL rows are deleted and the table becomes empty — however, the table's structure (its definition) remains in the database, unlike the DROP TABLE command which removes the structure as well.

Syntax

```
DELETE FROM table_name  
WHERE condition;
```

Example

To delete the record of the student with RollNo 105:

```
DELETE FROM STUDENT  
WHERE RollNo = 105;
```

Effect: the row for Esha Verma (RollNo 105) is permanently removed; the remaining 9 rows and the table structure stay unaffected.

Practice Questions

- Q1.** Which SQL command is used to remove row(s) from a table? (1 mark)
- Q2.** The DELETE command removes a column from a table. State True or False. (1 mark)
- Q3.** If the WHERE clause is not specified in a DELETE statement, then _____ rows of the table are deleted. (1 mark)]
- Q4.** Write an SQL query to delete the record of the student with RollNo 105. (2 marks)
- Q5.** Write an SQL query to delete the records of all students of the 'Humanities' stream who scored Marks below 65. (2 marks)
- Q6.** What is the difference between the following two statements?
(i) DELETE FROM STUDENT;
(ii) DELETE FROM STUDENT WHERE RollNo = 101; (2 marks)
- Q7.** Differentiate between DELETE and DROP commands (any two points). (2 marks)

Q8. The DELETE command belongs to which category of SQL commands?

- (a) DDL
- (b) DML
- (c) DCL
- (d) TCL (1 mark)

Q9. Write an SQL query to delete the records of students whose City is not known (missing). (2 marks)

Q10. The Principal instructs the removal of the records of students whose Marks are below the passing marks of 33, from a table RESULT(RollNo, Marks). Write the SQL command for this. (3 marks)

Answers

A1. The DELETE command.

A2. False — DELETE removes rows, not columns.

A3. all

A4. DELETE FROM STUDENT WHERE RollNo = 105;

A5. DELETE FROM STUDENT WHERE Stream = 'Humanities' AND Marks < 65;

A6. Statement (i) deletes ALL rows from the table (table becomes empty, but its structure remains); statement (ii) deletes only the single row where RollNo is 101.

A7. DELETE is a DML command that removes row(s) from a table and can use a WHERE clause; the table structure remains. DROP is a DDL command that removes the entire table — both its structure and data — permanently from the database.

A8. (b) DML (Data Manipulation Language)

A9. DELETE FROM STUDENT WHERE City IS NULL;

A10. DELETE FROM RESULT WHERE Marks < 33;

8. Aggregate (Group) Functions

Learning Objective: To perform a calculation on a set of column values and return a single summary value.

Understanding the Concept

- Aggregate functions (also called Group functions) operate on a group/set of values in a column and return a single value as the result.
- The five common aggregate functions are: MAX() — largest value, MIN() — smallest value, AVG() — average value, SUM() — total of values, COUNT() — number of values.
- MAX(), MIN(), AVG() and SUM() automatically ignore NULL values while calculating the result.
- COUNT(*) counts the total number of rows in the table, including rows with NULL values.
- COUNT(column_name) counts only the rows where that particular column has a non-NULL (present) value.

Syntax

```
SELECT MAX(column) | MIN(column) | AVG(column) | SUM(column) | COUNT(column/*)
FROM table_name
[WHERE condition];
```

Example


To display the highest and lowest Marks scored, from the STUDENT table:

```
SELECT MAX(Marks), MIN(Marks)
FROM STUDENT;
```

Output:

MAX(Marks)	MIN(Marks)
95	60

Mind Map

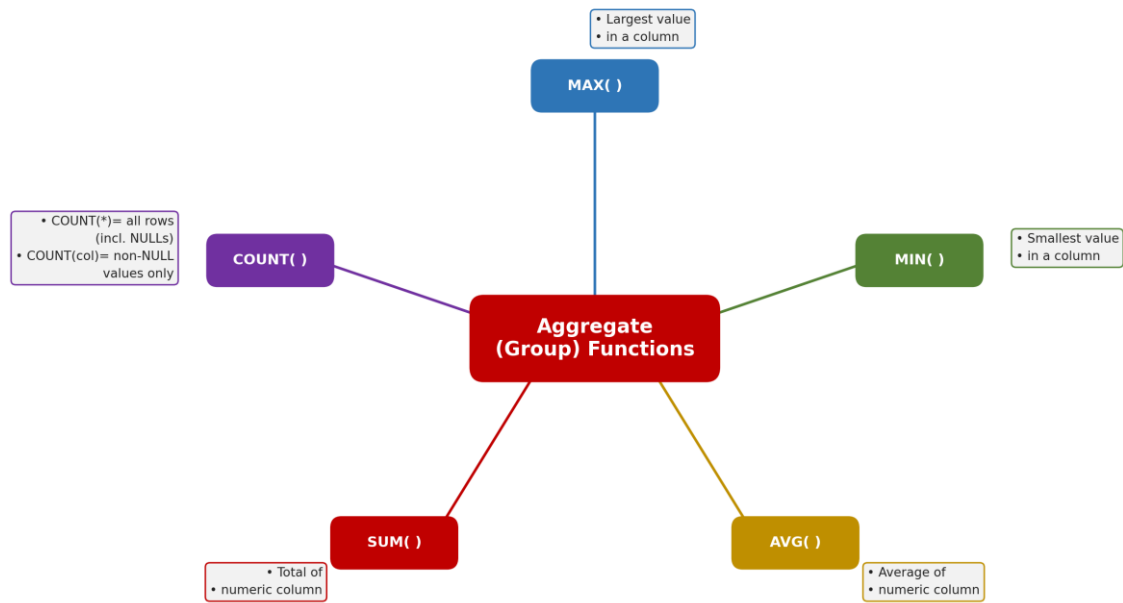

Practice Questions

Q1. Name any four aggregate (group) functions available in SQL. (1 mark)

Q2. What is the difference between COUNT(*) and COUNT(column_name)? (1 mark)

Q3. Write an SQL query to display the highest and lowest Marks scored, from the STUDENT table. (2 marks)

Q4. Write an SQL query to find the total number of students in the STUDENT table. (2 marks)

Q5. Write an SQL query to display the average Marks of students belonging to the 'Commerce' stream. (2 marks)

Q6. Write an SQL query to display the sum of Marks of all students. (2 marks)

Q7. Aggregate functions, except COUNT(*), ignore _____ values while performing their calculation. (1 mark)

Q8. If the Marks column of the STUDENT table (10 rows) has 2 rows with NULL Marks, what will be the output of:

SELECT COUNT(*), COUNT(Marks) FROM STUDENT; (2 marks) [

Q9. Which aggregate function would you use to find how many students have their City recorded (not missing)?

- (a) SUM(City)
- (b) COUNT(City)
- (c) MAX(City)
- (d) AVG(City) (1 mark)

Q10. The Sports teacher wants to know, in a single query, the number of students, the highest Marks, and the average Marks of students in the 'Science' stream. Write the SQL query. (3 marks)

Answers

- A1.** MAX(), MIN(), AVG(), SUM() (and COUNT()).
- A2.** COUNT(*) counts the total number of rows, including rows with NULL values.
COUNT(column_name) counts only the rows where that column has a non-NULL value.
- A3.** SELECT MAX(Marks), MIN(Marks) FROM STUDENT;
- A4.** SELECT COUNT(*) FROM STUDENT;
- A5.** SELECT AVG(Marks) FROM STUDENT WHERE Stream = 'Commerce';
- A6.** SELECT SUM(Marks) FROM STUDENT;
- A7.** NULL
- A8.** COUNT(*) = 10, COUNT(Marks) = 8
- A9.** (b) COUNT(City)
- A10.** SELECT COUNT(*), MAX(Marks), AVG(Marks) FROM STUDENT WHERE Stream = 'Science';