Optimize query performance in Azure SQL

- Analyze individual query performance and determine where improvements can be made.
- Explore performance-related Dynamic Management Objects.
- Investigate how indexes and database design affect queries.

Prerequisites

- Ability to use tools for running queries against a Microsoft SQL database, either on-premises on cloud-based
- Ability to write code in the SQL language, particularly the Microsoft T-SQL dialect, at a basic level.
- Basic understanding of structure and usage of SQL Server indexes
- Basic understanding of relational database concepts

Explore query performance optimization

Intermediate

Database Administrator

Azure SQL Database

SQL Server

- Read and understand various forms of execution plans.
- Compare estimated vs actual plans.
- Learn how and why plans are generated.
- Understand the purpose and benefits of the Query Store.

Learning objectives

- After completing this module, you will be able to:
- **Generate and save execution plans**
- Compare the different types of execution plans
- Understand how and why query plans are generated
- Explain the purpose and benefits of the Query Store
- Investigate the available reports and data in the Query Store

Introduction

- One of the most crucial skills to acquire in database performance tuning is the ability to read and understand query execution plans.
- These plans provide detailed insights into the behavior of the database engine as it executes queries and retrieves results.
- By analyzing execution plans, you can identify inefficiencies, optimize query performance, and ensure that your database runs smoothly.
- The Query Store is an invaluable tool for quickly identifying your most expensive queries and tracking changes in performance over time.
- It offers comprehensive data collection, including automated query plan and execution runtime analysis.
- This allows you to pinpoint performance bottlenecks and make informed decisions to improve query efficiency.

- SQL Server implements locking and blocking mechanisms to manage concurrency and ensure data consistency.
- These mechanisms prevent conflicts and maintain the integrity of your data when multiple users access the database simultaneously.
- Also, you can adjust isolation levels in SQL Server to fine-tune concurrency management.
- By selecting the appropriate isolation level, you can balance the trade-offs between data consistency and performance, ensuring that your database operates optimally under various workloads.

Understand query plans

- Understanding how database optimizers work is essential before diving into execution plan details.
- SQL Server uses a cost-based query optimizer, which calculates the cost for multiple possible plans based on statistics it has on the columns being used and the potential indexes for each operation in the query plan.
- This information helps the optimizer determine the total cost for each plan.
- Complex queries can have thousands of possible execution plans, but the optimizer doesn't evaluate every single one.
- Instead, it uses heuristics to identify plans that are likely to perform well and then selects the lowest cost plan from those evaluated.
- Since the query optimizer is cost-based, it's crucial to provide it with accurate inputs for decision-making.
- SQL Server relies on statistics to track the distribution of data in columns and indexes, and these statistics must be kept up to date to avoid generating suboptimal execution plans.
- Although SQL Server automatically updates its statistics as data changes in a table, more frequent updates may be necessary for rapidly changing data.
- The optimizer considers many factors when building a plan, including the database's compatibility level, row estimates based on statistics, and available indexes.
- When a user submits a query to the database engine, the following process happens:
- The query is parsed for proper syntax, and if correct, a parse tree of database objects is generated.
- The parse tree is then input to a database engine component called the Algebrizer for binding.
- This step validates that columns and objects in the query exist and identifies the data types being processed.
- The output is a query processor tree, which serves as input for the next step.
- Query optimization is CPU-intensive, so the database engine caches execution plans in a special memory area called the plan cache.
- If a plan for the query already exists, it's retrieved from the cache.
- Each query in the cache has a hash value generated based on the T-SQL in the query, known as the query_hash.
- The engine generates a query_hash for the current query and checks for matches in the plan cache.
- If no plan exists, the Query Optimizer uses its cost-based optimizer to generate several execution plan options based on statistics about the columns, tables, and indexes used in the query.
- The output is a query execution plan.
- The query is executed using an execution plan from the plan cache or a new plan generated in the previous step.
- The output is the results of your query.

Note

- To learn more about how the query processor works, see Query Processing Architecture Guide
- Let’s look at an example.
- Consider the following query:

SQL

```
SELECT orderdate,
```

```
AVG(salesAmount)
FROM FactResellerSales
WHERE ShipDate = '2013-07-07'
GROUP BY orderdate;
```

- In this example, SQL Server checks for the existence of the OrderDate, ShipDate, and SalesAmount columns in the FactResellerSales table.
- If these columns exist, SQL Server generates a hash value for the query and examines the plan cache for a matching hash value.
- If a matching hash value is found, the engine attempts to reuse the plan.
- If no matching hash value is found, SQL Server examines the available statistics on the OrderDate and ShipDate columns.
- The WHERE clause referencing the ShipDate column is known as the predicate in this query.
- If there's a nonclustered index that includes the ShipDate column, SQL Server will likely include it in the plan, provided the costs are lower than retrieving data from the clustered index.
- The optimizer then chooses the lowest cost plan from the available options and executes the query.
- Query plans combine a series of relational operators to retrieve data and capture information such as estimated row counts.
- Another element of the execution plan is the memory required for operations like joining or sorting data, known as the memory grant.
- The memory grant highlights the importance of statistics.
- If SQL Server estimates an operator returns 10,000,000 rows when it actually returns 100, a larger memory grant is allocated to the query.
- An excessively large memory grant can cause two issues.
- First, the query may encounter a RESOURCE_SEMAPHORE wait, indicating it's waiting for SQL Server to allocate a large amount of memory.
- SQL Server defaults to waiting for 25 times the cost of the query (in seconds) before executing, up to 24 hours.
- Second, if there isn't enough memory available when the query is executed, it spills to tempdb, which is slower than operating in memory.
- The execution plan also stores other metadata about the query, such as the database compatibility level, the degree of parallelism, and the parameters supplied if the query is parameterized.
- Query plans can be viewed in either a graphical representation or a text-based format.
- Text-based options are invoked with SET commands and apply only to the current connection.
- These plans can be viewed anywhere you can run T-SQL queries.
- Most DBAs prefer graphical plans because they allow you to see the plan as a whole, including the shape of the plan.
- There are several ways to view and save graphical query plans.
- The most common tool for this purpose is SQL Server Management Studio.
- Additionally, there are third-party tools that support viewing graphical execution plans.
- There are three different types of execution plans.

Estimated Execution Plan

- This type of execution plan is generated by the query optimizer.
- The metadata and size of the query memory grant are based on estimates from the statistics present in the database at the time of query compilation.
- To see a text-based estimated plan, run the command SET SHOWPLAN_ALL ON before executing the query.
- When you run the query, you see the steps of the execution plan, but the query won't be executed, and you won't see any results.
- The SET option remains in effect until you set it OFF.

Actual Execution Plan


- This type of plan is the same as the estimated plan; however, it also includes the execution context for the query.
- This context contains the estimated and actual row counts, any execution warnings, the actual degree of parallelism (number of processors used), and the elapsed and CPU times used during execution.
- To see a text-based actual plan, run the command SET STATISTICS PROFILE ON before executing the query.
- The query executes, and you get both the plan and the results.

• Live Query Statistics

- This plan viewing option combines the estimated and actual plans into an animated plan that displays execution progress through the operators.
- It refreshes every second and shows the actual number of rows flowing through the operators.
- Another benefit of Live Query Statistics is that it shows the handoff from operator to operator, which can be helpful in troubleshooting performance issues.
- Because this type of plan is animated, it's only available as a graphical plan.

Explain estimated and actual query plans

- Actual versus estimated execution plans can be confusing.
- The difference is that the actual plan includes runtime statistics that aren't captured in the estimated plan.
- The operators used and the order of execution will be the same as the estimated plan in nearly all cases.
- Another consideration is that capturing an actual execution plan requires the query to be executed, which can be time-consuming or not possible.
- For example, an UPDATE statement can only be run once.
- However, if you need to see query results and the plan, you need to use one of the actual plan options.

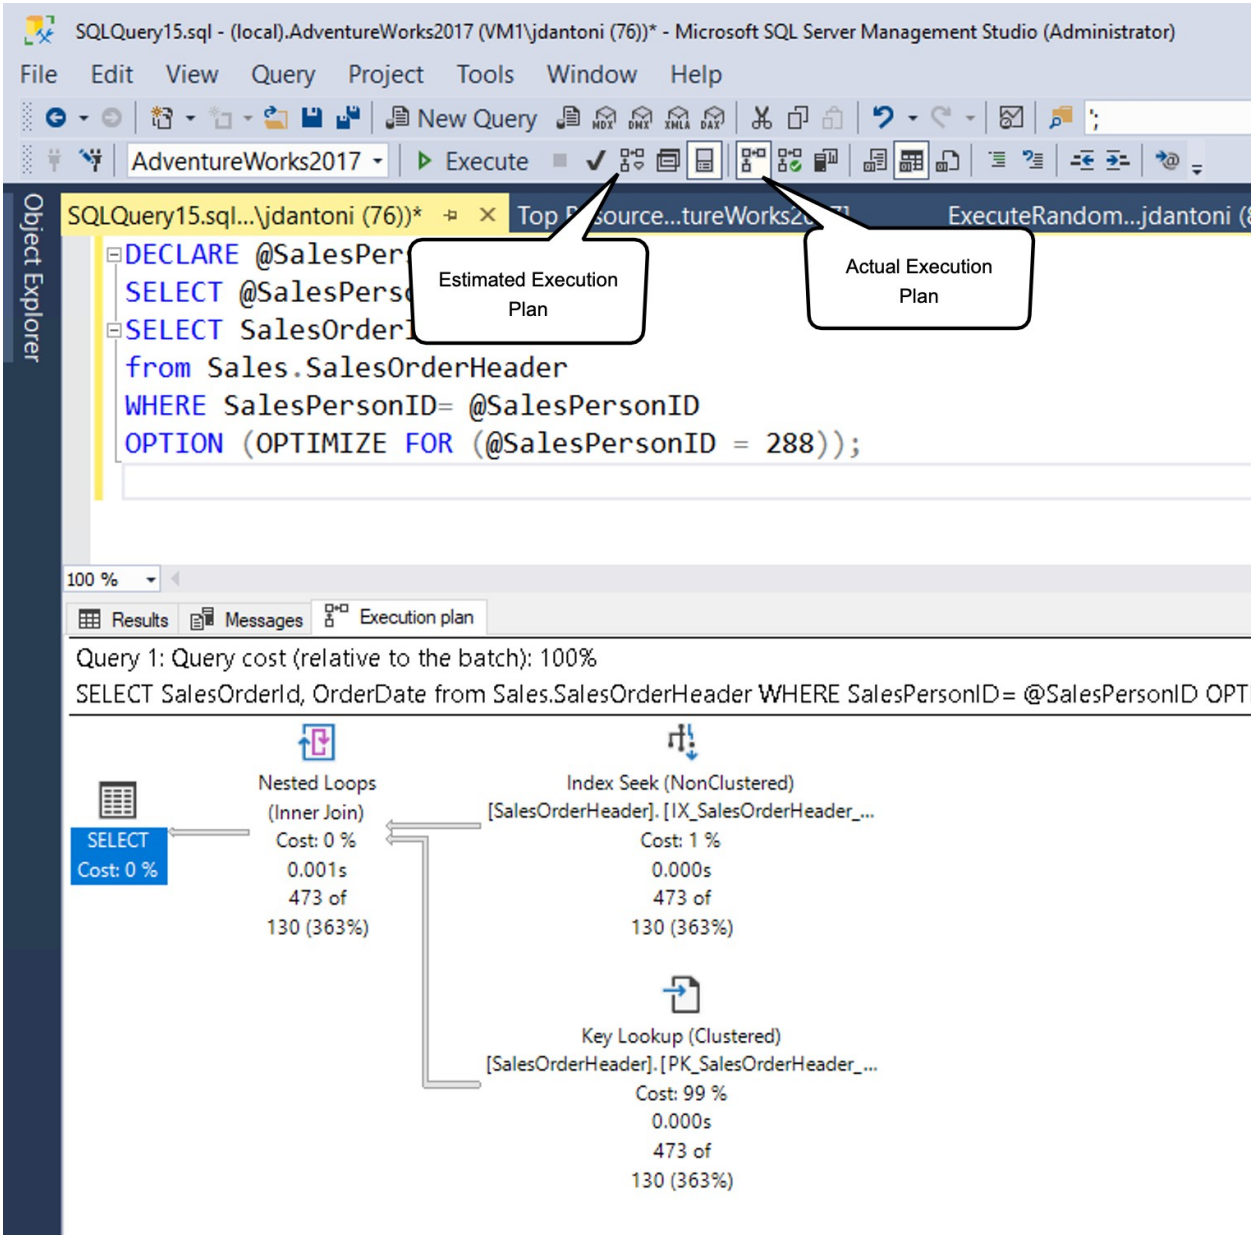

- As shown, you can generate an estimated plan in SSMS by selecting the button indicated by the estimated query plan box (or using the keyboard command Control+L).
- You can generate the actual plan by selecting the icon shown (or using the keyboard command Control+M), and then executing the query.
- The two option buttons work differently.
- The Include Estimated Query Plan button responds immediately to any query highlighted (or the entire workspace, if nothing is highlighted), whereas the Include Actual Query Plan button requires the query to be executed.
- There's overhead to both executing a query and generating an estimated execution plan, so viewing execution plans should be done carefully in a production environment.
- Typically, you can use the estimated execution plan while writing your query to understand its performance characteristics, identify missing indexes, or detect query anomalies.
- The actual execution plan is best used to understand the runtime performance of the query and, most importantly, gaps in statistical data that cause the query optimizer to make suboptimal choices based on the data it has available.

Read a query plan

- Execution plans show you what tasks the database engine is performing while retrieving the data needed to satisfy a query.
- Let's dive into the plan.

Transact-SQL


```
SELECT [stockItemName]
```

- ,[UnitPrice] * [QuantityPerOuter] AS CostPerOuterBox

,[QuantityonHand]

```
FROM [Warehouse].[StockItems] s
JOIN [Warehouse].[StockItemHoldings] sh ON s.StockItemID = sh.StockItemID
ORDER BY CostPerOuterBox;
```

- This query is joining the StockItems table to the StockItemHoldings table where the values in the column StockItemID are equal.
- The database engine has to first identify those rows before it can process the rest of the query.

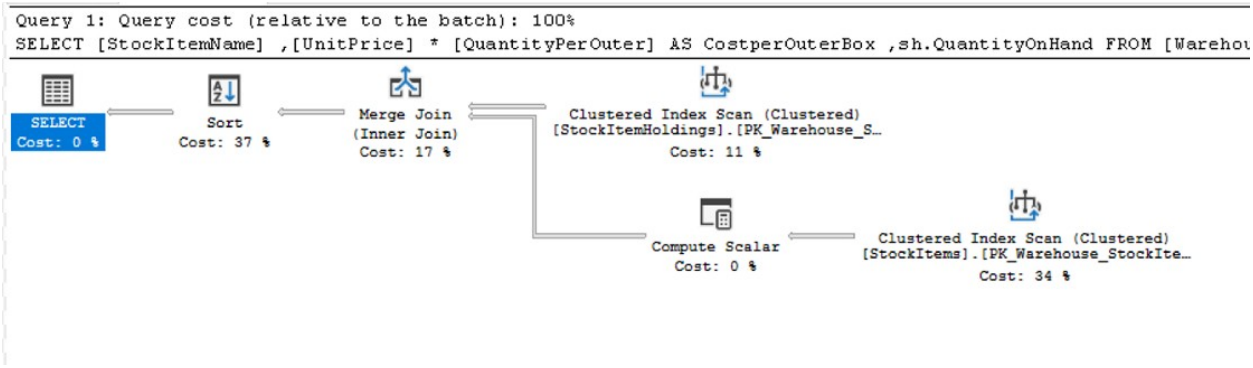

- Each icon in the plan represents a specific operation, which corresponds to the various actions and decisions that make up an execution plan.
- The SQL Server database engine has over 100 query operators that can be part of an execution plan.
- Under each operator icon, there's a cost percentage relative to the total cost of the query.
- Even an operation showing a cost of 0% still represents some cost.
- In fact, 0% is due to rounding, as graphical plan costs are always shown as whole numbers, and the real percentage is something less than 0.5%.
- The flow of execution in an execution plan is from right to left, and top to bottom, so in this plan, the Clustered Index Scan operation on the StockItemHoldings.PK_Warehouse_StockItemHoldings clustered index is the first operation in the query.
- The widths of the lines that connect the operators are based on the estimated number of rows of data that flow onward to the next operator.
- A thick arrow is an indicator of large operator to operator transfer and may be indicative of an opportunity to tune a query.
- You can also hold your mouse over an operator and see additional information in a ToolTip.



Clustered Index Scan (Clustered)


Scanning a clustered index, entirely or only a range.

Physical Operation	Clustered Index Scan
Logical Operation	Clustered Index Scan
Estimated Execution Mode	Row
Storage	RowStore
Estimated Operator Cost	0.0131613 (34%)
Estimated I/O Cost	0.0127546
Estimated Subtree Cost	0.0131613
Estimated CPU Cost	0.0004067
Estimated Number of Executions	1
Estimated Number of Rows	227
Estimated Number of Rows to be Read	227
Estimated Row Size	128 B
Ordered	True
Node ID	4

Object
[WideWorldImporters].[Warehouse].[StockItems].
[PK_Warehouse_StockItems] [s]

Output List
[WideWorldImporters].[Warehouse].[StockItems].StockItemID,
[WideWorldImporters].[Warehouse].[StockItems].StockItemName,
[WideWorldImporters].[Warehouse].
[StockItems].QuantityPerOuter, [WideWorldImporters].
[Warehouse].[StockItems].UnitPrice

- The tooltip highlights the cost and estimates for the estimated plan, and for an actual plan, it includes comparisons to the actual rows and costs.
- Each operator also has properties that provide more details than the tooltip.
- By right-clicking on a specific operator, you can select the Properties option from the context menu to see the full property list.
- This option opens a separate Properties pane in SQL Server Management Studio, which by default is on the right side.
- Once the Properties pane is open, selecting any operator populates the Properties list with details for that operator.
- Alternatively, you can open the Properties pane by selecting on View in the main SQL Server Management Studio menu and choosing Properties.

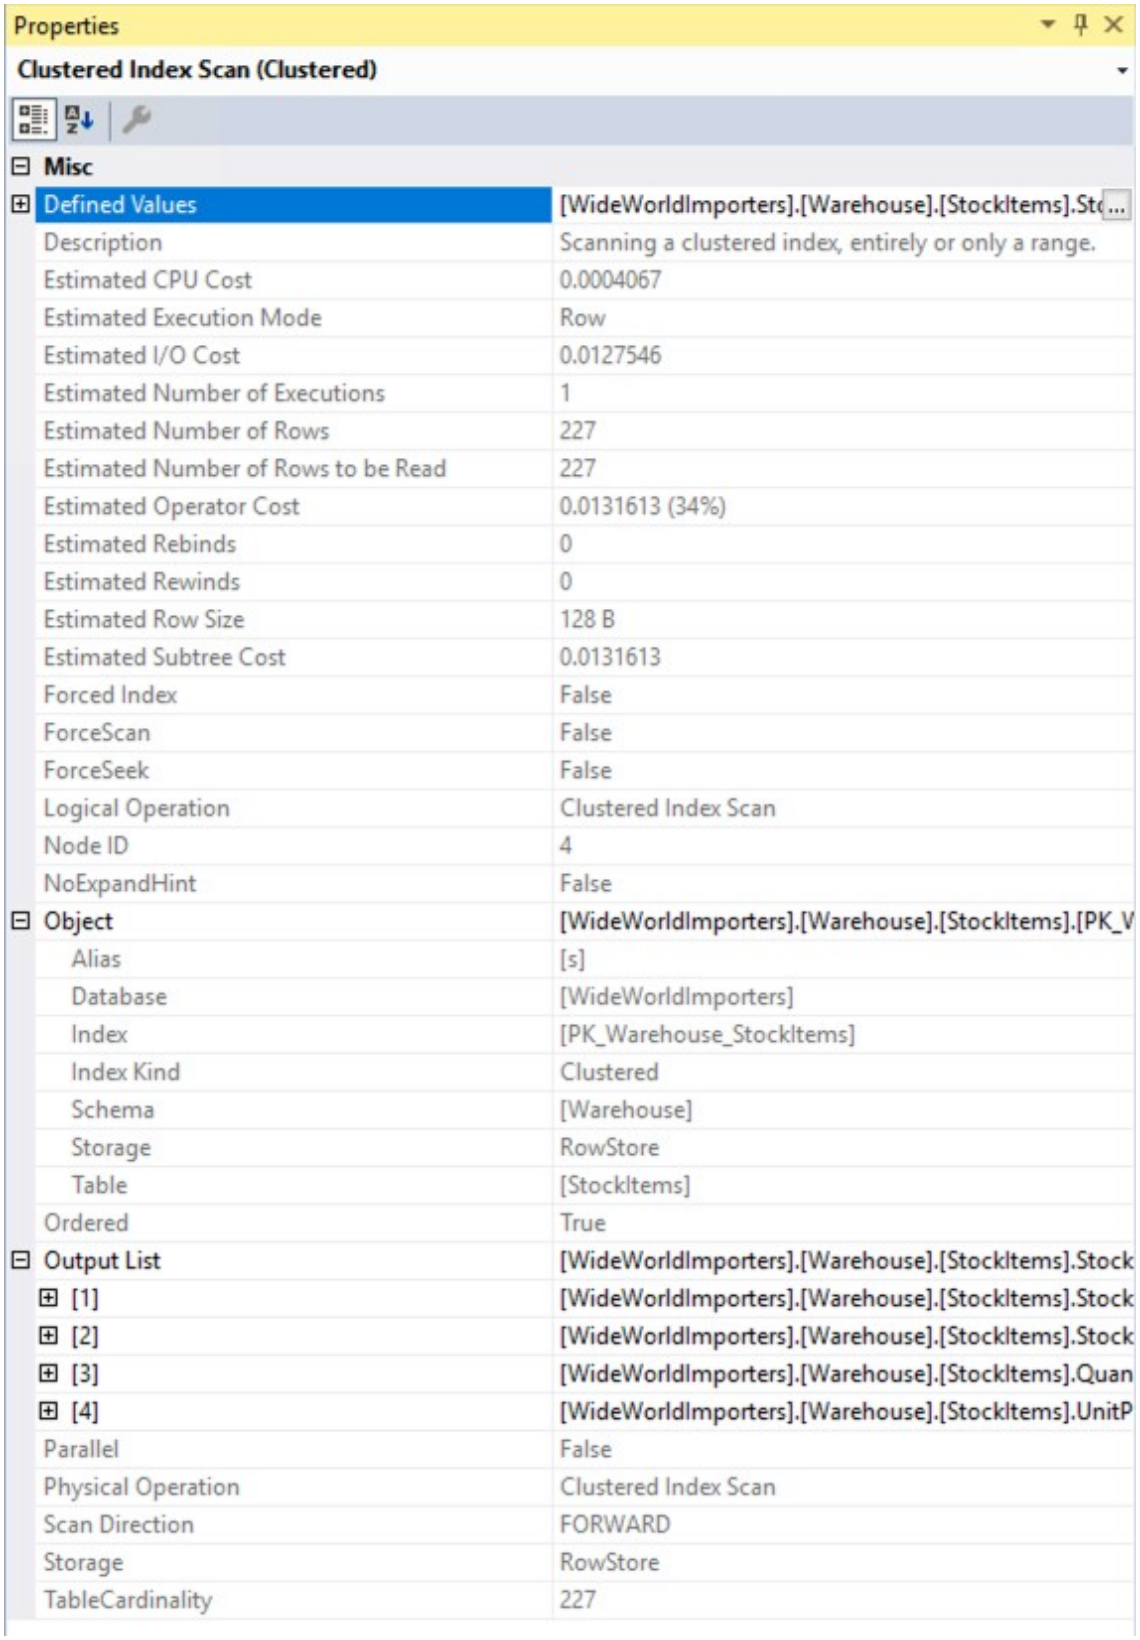

- The Properties pane includes additional information and shows the output list, detailing the columns being passed to the next operator.
- These columns may indicate that a nonclustered index is needed to improve query performance when analyzed with a clustered index scan.
- Since a clustered index scan operation reads the entire table, a nonclustered index on the StockItemID column in each table could be more efficient in this scenario.

Lightweight query profiling

- When you generate actual execution plans, whether using SSMS or the Extended Events monitoring infrastructure, it can introduce significant overhead.
- Therefore, this process is typically reserved for live site troubleshooting efforts.
- Observer overhead, as it's known, is the cost of monitoring a running application.
- In some scenarios, this cost can be just a few percentage points of CPU utilization, but in other cases, like capturing actual execution plans, it can significantly slow down individual query performance.
- The legacy profiling in SQL Server's engine could produce up to 75% overhead for capturing query information, whereas the lightweight profiling has a maximum overhead of around 2%.
- In the first version of lightweight profiling, it collected row count and I/O utilization information (the number of logical and physical reads and writes performed by the database engine to satisfy a given query).
- Additionally, a new extended event called query_thread_profile was introduced to allow data from each operator in a query plan to be inspected.
- In the initial version of lightweight profiling, using the feature requires trace flag 7412 to be enabled globally.
- If lightweight profiling isn't enabled globally, you can use the USE HINT query hint with QUERY_PLAN_PROFILE to enable lightweight profiling at the query level.
- When a query with this hint completes execution, a query_plan_profile extended event is generated, providing an actual execution plan.
- Here's an example of a query with this hint:

Transact-SQL

```
SELECT [stockItemName]
```

- ,[UnitPrice] * [QuantityPerOuter] AS CostPerOuterBox

,[QuantityonHand]

FROM [Warehouse].[StockItems] s

JOIN [Warehouse].[StockItems] sh ON s.StockItemID = sh.StockItemID

ORDER BY CostPerOuterBox

OPTION(USE HINT ('QUERY_PLAN_PROFILE'));

Last query plans stats

- Lightweight profiling is enabled by default in both SQL Server 2019 and Azure SQL Database and managed instance.
- Lightweight profiling is also available as a database scoped configuration option, called LIGHTWEIGHT_QUERY_PROFILING.
- With the database scoped option, you can disable the feature for any of your user databases independent of each other.
- Also, there's a dynamic management function called sys.dm_exec_query_plan_stats, which can show you the last known actual query execution plan for a given plan handle.
- In order to see the last known actual query plan through the function, you can enable trace flag 2451 server-wide.
- Alternatively, you can enable this functionality using a database scoped configuration option called LAST_QUERY_PLAN_STATS.
- You can combine this function with other objects to get the last execution plan for all cached queries:

SQL


```
SELECT *
```

FROM sys.dm_exec_cached_plans AS cp


- CROSS APPLY sys.dm_exec_sql_text(plan_handle) AS st
- CROSS APPLY sys.dm_exec_query_plan_stats(plan_handle) AS qps;

GO

- This functionality lets you quickly identify the runtime stats for the last execution of any query in your system, with minimal overhead.
- The following image shows how to retrieve the plan.
- If you select the execution plan XML, which will be the first column of results, it displays the execution plan shown in the second image below.

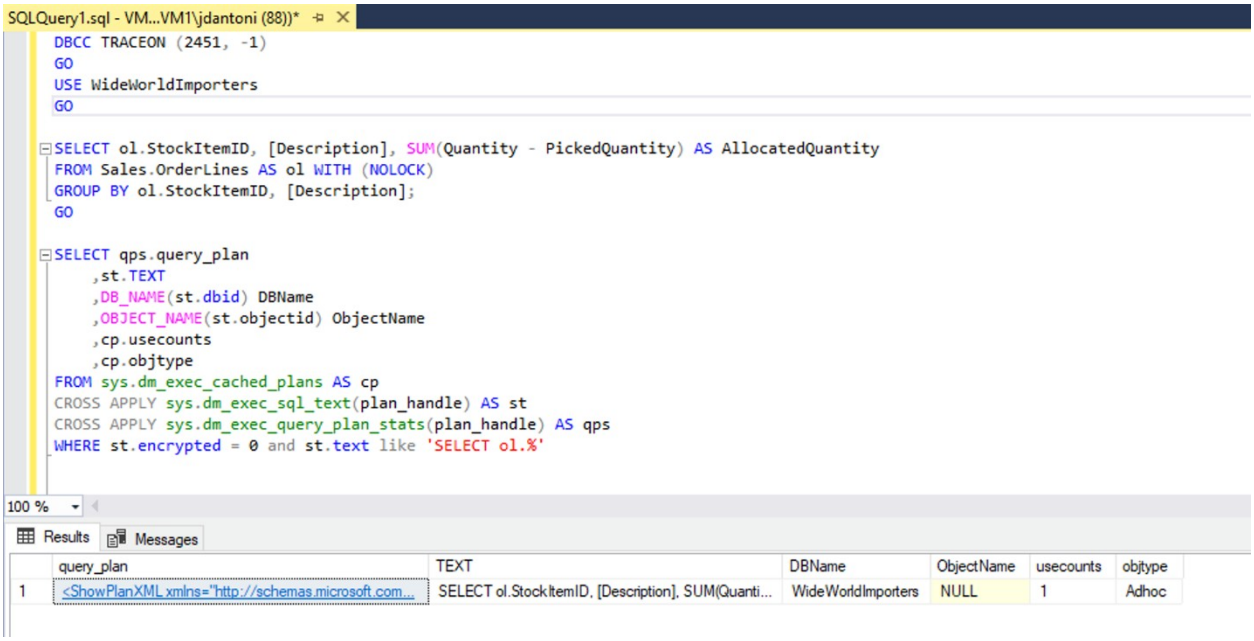

- As you can see from the properties of the Columnstore Index Scan in the following image, the plan retrieved from the cache has actual number of rows retrieved in the query.

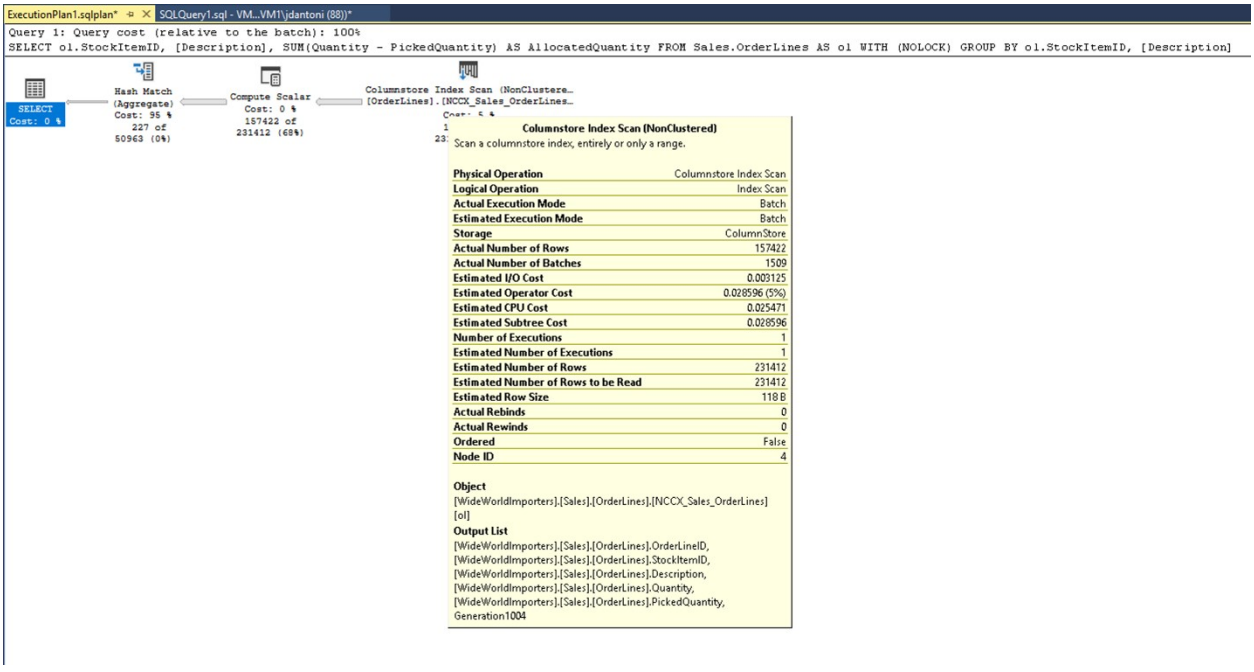

- Describe dynamic management views and functions
- SQL Server provides several hundred dynamic management objects.
- These objects contain system information that can be used to monitor the health of a server instance, diagnose problems, and tune performance.
- Dynamic management views and functions return internal data about the state of the database or the instance.

- Dynamic Management Objects can be either views (DMVs) or functions (DMFs), but most people use the acronym DMV to refer to both types of object.
- There are two levels of DMVs, server scoped and database scoped.
- Server scoped objects – require VIEW SERVER STATE permission on the server
- Database scoped objects – require the VIEW DATABASE STATE permission within the database
- The names of the DMVs are all prefixed with sys.dm_ followed by the functional area and then the specific function of the object.
- SQL Server organizes dynamic management objects into many functional categories — including OS-related, execution-related, database-related, index-related, I/O-related, transaction-related, security-related, and replication-related — among others.
- Common examples include:
- Database-related dynamic management objects
- Query execution related dynamic management objects
- Transaction related dynamic management objects
- To learn about queries to monitor server and database performance, see Monitoring Microsoft Azure SQL Database and Azure SQL Managed Instance performance using dynamic management views.

Note


- For older versions of SQL Server where the query store isn't available, you can use the view sys.dm_exec_cached_plans with the functions sys.dm_exec_sql_text and sys.dm_exec_query_plan to return information about execution plans.
- However, unlike with Query Store, you won't be able to see changes in plans for a given query.
- Azure SQL Database has a slightly different set of the DMVs available than SQL Server; some objects are available only in Azure SQL Database, while other objects are only available in SQL Server.
- Some are scoped at the server level and aren't applicable in the Azure model (the sys.dm_os_wait_stats DMV is an example of a server-scoped DMV), while others are specific to Azure SQL Database, like sys.dm_db_resource_stats and provide Azure-specific information that isn't available in (or relevant to) SQL Server.

Explore Query Store

- The SQL Server Query Store is a per-database feature that automatically captures a history of queries, plans, and runtime statistics, simplifying performance troubleshooting and query tuning.
- It also provides insights into database usage patterns and resource consumption.

The Query Store consists of three stores:

- Plan store: Stores estimated execution plan information.
- Runtime stats store: Stores execution statistics information.
- Wait stats store: Persists wait statistics information.

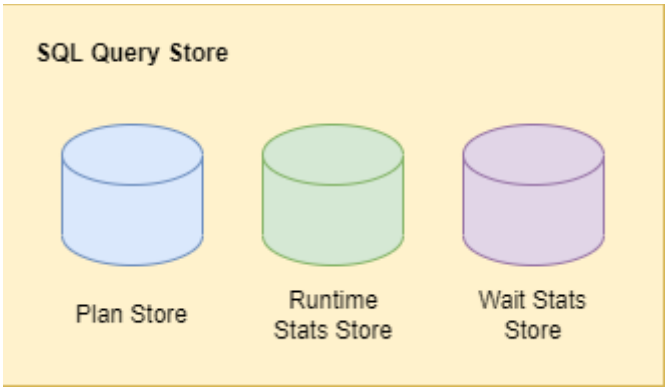

Enable the Query Store

- The Query Store is enabled by default in Azure SQL databases and for new databases in SQL Server 2022 and later.
- If you want to use it with SQL Server 2016 through 2019 and Azure Synapse Analytics, you need to enable it first.
- To enable the Query Store feature, use the following query valid for your environment:


SQL

```
-- SQL Server
ALTER DATABASE <database_name> SET QUERY_STORE = ON (OPERATION_MODE = READ_WRITE);
```

```
-- Azure Synapse Analytics
ALTER DATABASE <database_name> SET QUERY_STORE = ON;
```

How the Query Store collects data

- The Query Store integrates with the query processing pipeline at multiple stages.
- At each integration point, data is collected in memory and written to disk asynchronously to minimize I/O overhead.
- The integration points are as follows:
- When a query executes for the first time, its query text and initial estimated execution plan are sent to the Query Store and persisted.
- The plan updates in the Query Store when a query recompile.
- If the recompile results in a newly generated execution plan, it also persists in the Query Store to augment the previous plans.
- Additionally, the Query Store keeps track of the execution statistics for each query plan for comparison purposes.
- During the compile and check for recompile phases, the Query Store identifies if there's a forced plan for the query to be executed.
- The query is recompiled if the Query Store provides a forced plan different from the plan in the procedure cache.
- When a query executes, its runtime statistics persist in the Query Store.
- The Query Store aggregates this data to ensure an accurate representation of every query plan.

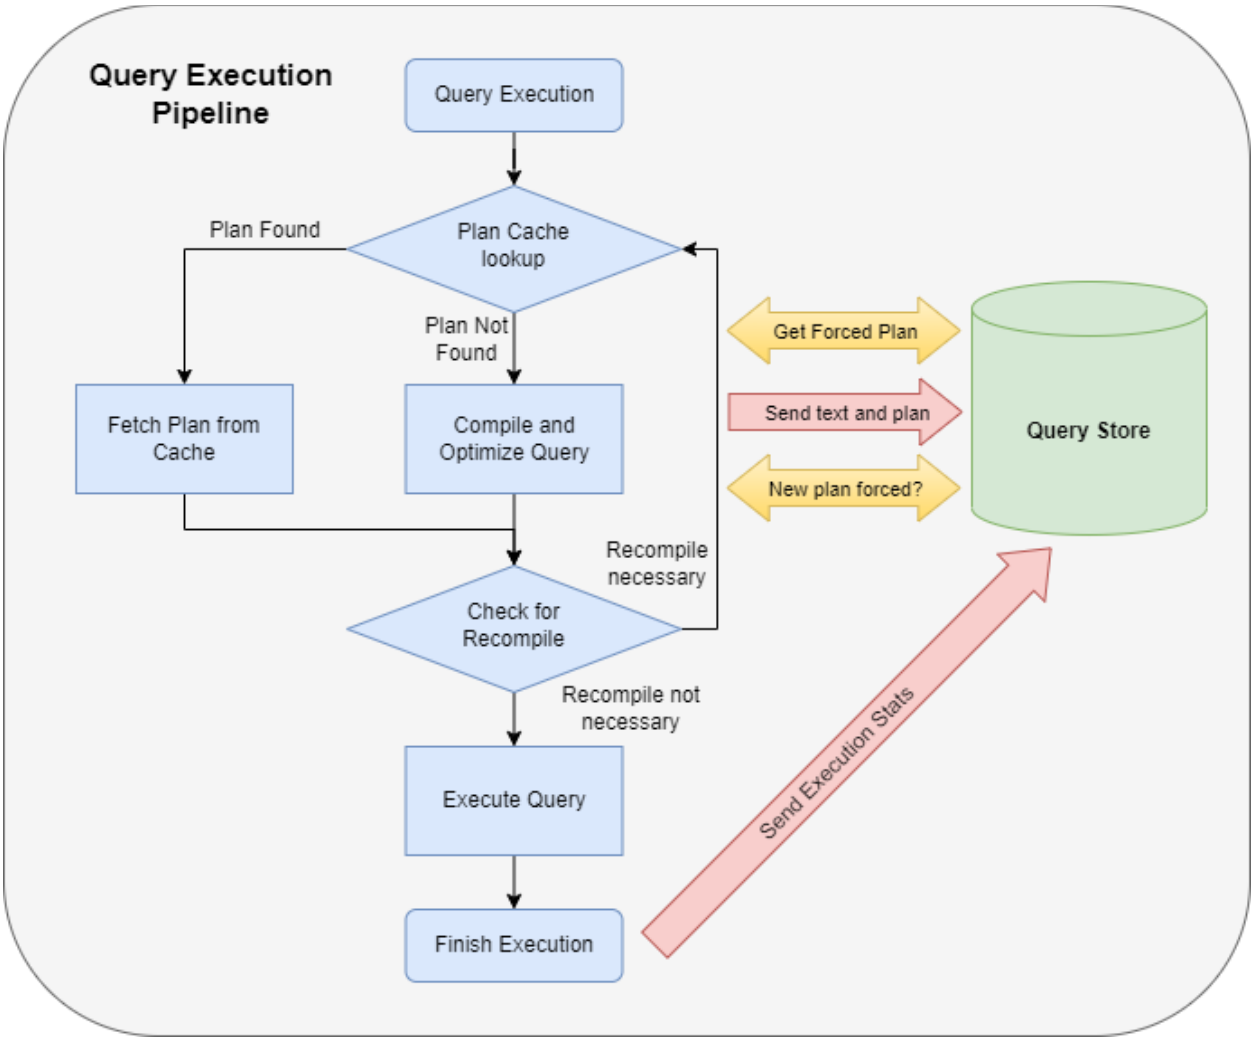


- To learn more about how Query Store collects data, see How Query Store collects data.

Common scenarios

- The SQL Server Query Store provides valuable insights into the performance of database operations.
- Common scenarios include:
- Identifying and fixing performance regressions due to inferior query execution plan selection.
- Identifying and tuning the highest resource consumption queries.
- A/B testing to evaluate the impacts of database and application changes.
- Ensuring performance stability after SQL Server upgrades.
- Determining the most frequently used queries.
- Auditing the history of query plans for a query.
- Identifying and improving unplanned workloads.
- Understanding the prevalent wait categories of a database and the contributing queries and plans affecting wait times.
- Analyzing database usage patterns over time in terms of resource consumption (CPU, I/O, Memory).


Discover the Query Store views

- Once Query Store is enabled on a database, the Query Store folder is visible for the database in Object Explorer.
- For Azure Synapse Analytics, the Query Store views are displayed under System Views.
- The Query Store views provide aggregated, quick insights into the performance aspects of the SQL Server database.

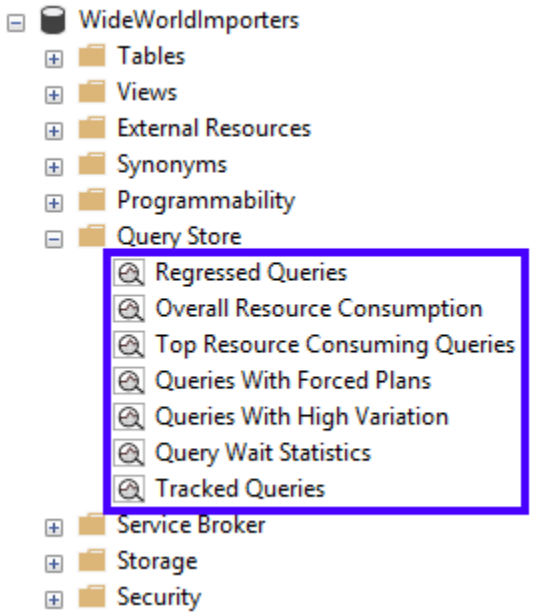

Regressed Queries

- A regressed query experiences performance degradation over time due to execution plan changes.
- Estimated execution plans can change due to various factors, including schema changes, statistics changes, and index changes.
- Investigating the procedure cache might be the first instinct, but it only stores the latest execution plan for a query, and plans can be evicted based on the system's memory demands.
- The Query Store, however, persists multiple execution plans for each query, allowing the flexibility to choose a specific plan through plan forcing to address query performance regression caused by plan changes.
- The Regressed Queries view can pinpoint queries whose execution metrics are regressing due to execution plan changes over a specified timeframe.
- This view allows filtering based on a selected metric (such as duration, CPU time, row count, and more) and a statistic (total, average, min, max, or standard deviation).
- It then lists the top 25 regressed queries based on the provided filter.
- By default, a graphical bar chart view of the queries is displayed, but you can optionally view the queries in a grid format.
- After selecting a query from the top-left query pane, the plan summary pane displays the persisted query plans associated with the query over time.
- Selecting a query plan in the Plan Summary pane shows a graphical query plan in the bottom pane.
- Toolbar buttons in both the plan summary pane and graphical query plan pane allow you to force the selected plan for the selected query.
- This pane structure and behavior are consistently used across all SQL Query views.

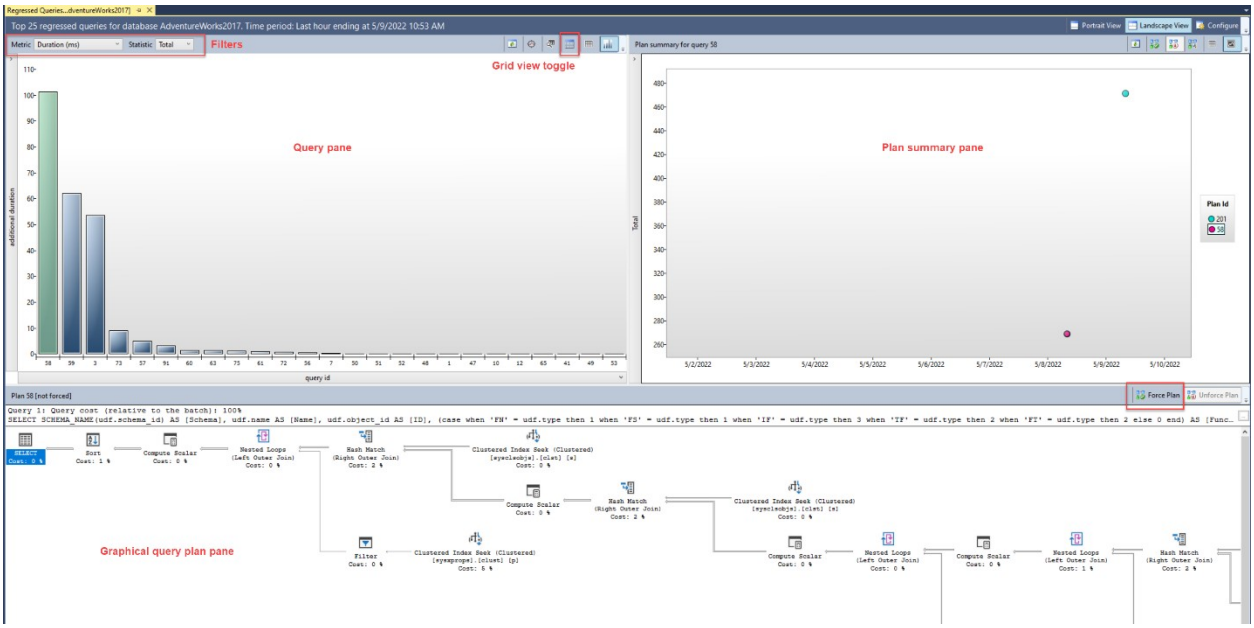


- Alternatively, you can use the sp_query_store_force_plan stored procedure to use plan forcing.

```
SQL
EXEC sp_query_store_force_plan @query_id=73, @plan_id=79
```


Overall Resource Consumption

- The Overall Resource Consumption view allows for analyzing total resource consumption for multiple execution metrics (such as execution count, duration, wait time, and more) for a specified timeframe.
- The rendered charts are interactive; when selecting a measure from one of the charts, a drill through view displaying the queries associated with the chosen measure displays in a new tab.

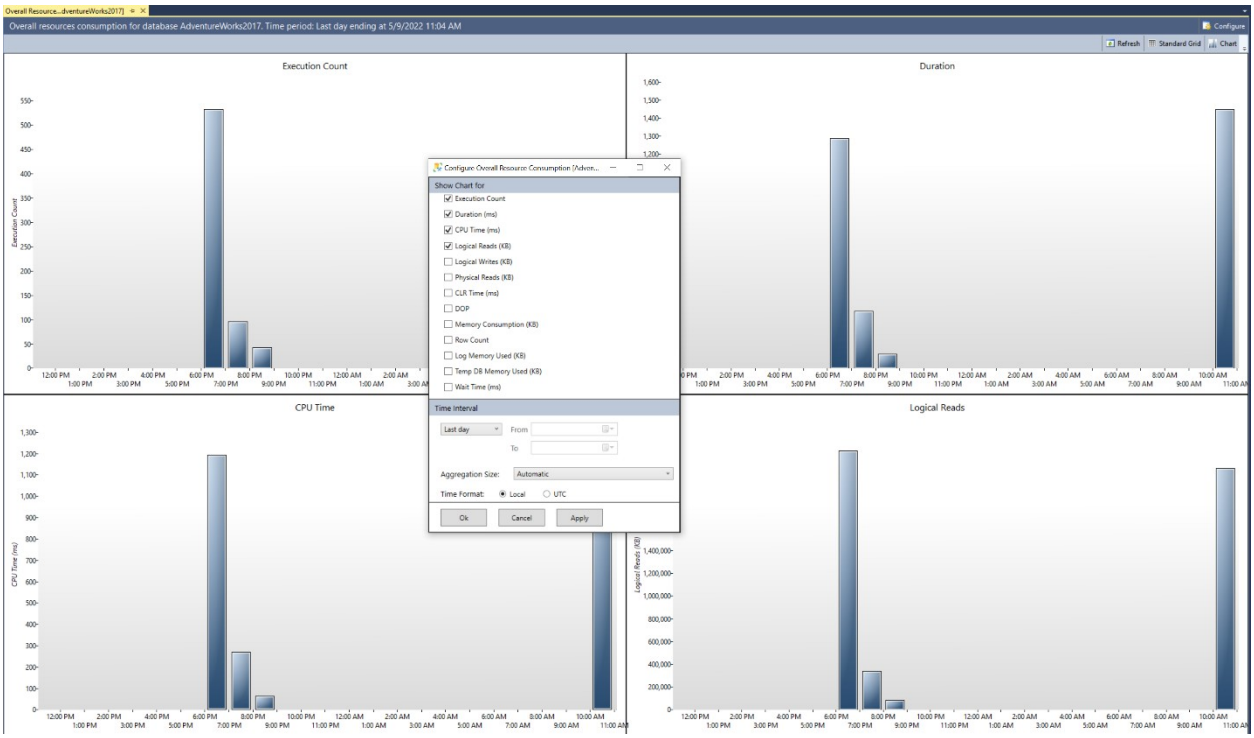


- The details view provides the top 25 resource consumer queries that contributed to the metric that was selected.
- This details view uses the consistent interface that allows for the inspection of the associated queries and their details, evaluate saved estimated query plans, and optionally use plan forcing to improve performance.

- This view is valuable when system resource contention becomes an issue, such as when CPU usage reaches capacity.

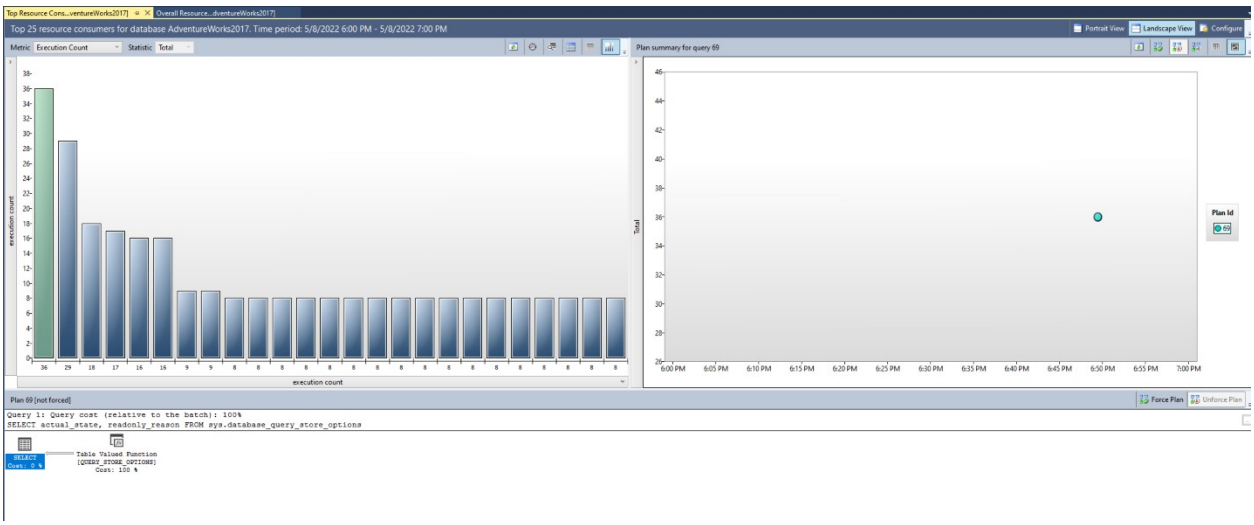


Top Resource Consuming Queries

- The Top Resource Consuming Queries view is similar to the details drill down of the Overall Resource Consumption view.
- It also allows for selecting a metric and a statistic as a filter.
- However, the queries it displays are the top 25 most impactful queries based on the chosen filter and timeframe.

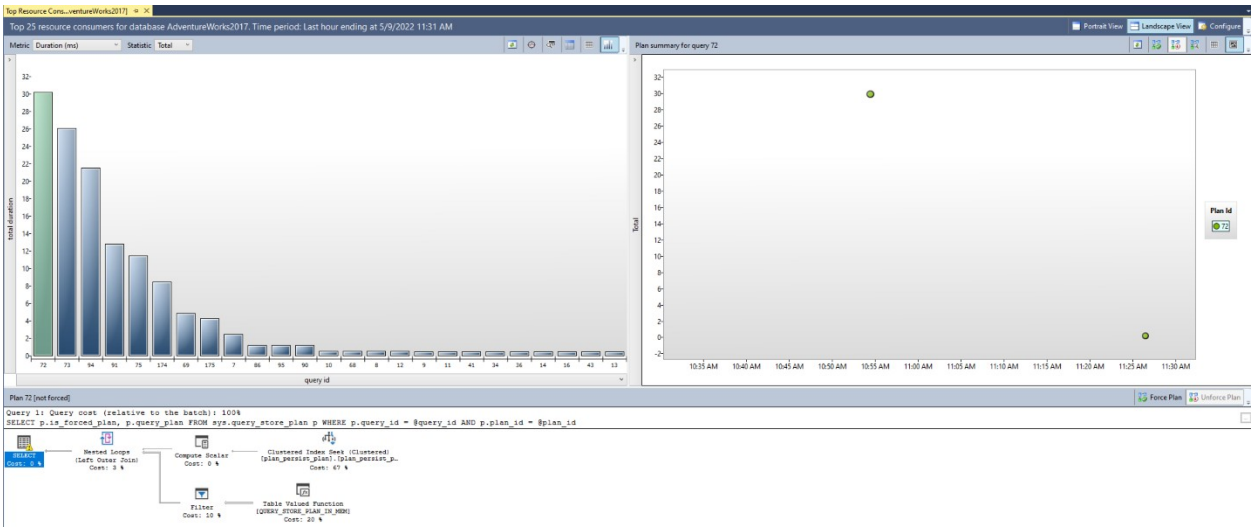


- The Top Resource Consuming Queries view provides the first indication of the unplanned nature of the workload when identifying and improving unplanned workloads.
- For example, in the following image, the Execution Count metric and the Total statistic are selected to unveil that approximately 90% of the top resource-consuming queries are only executed once.

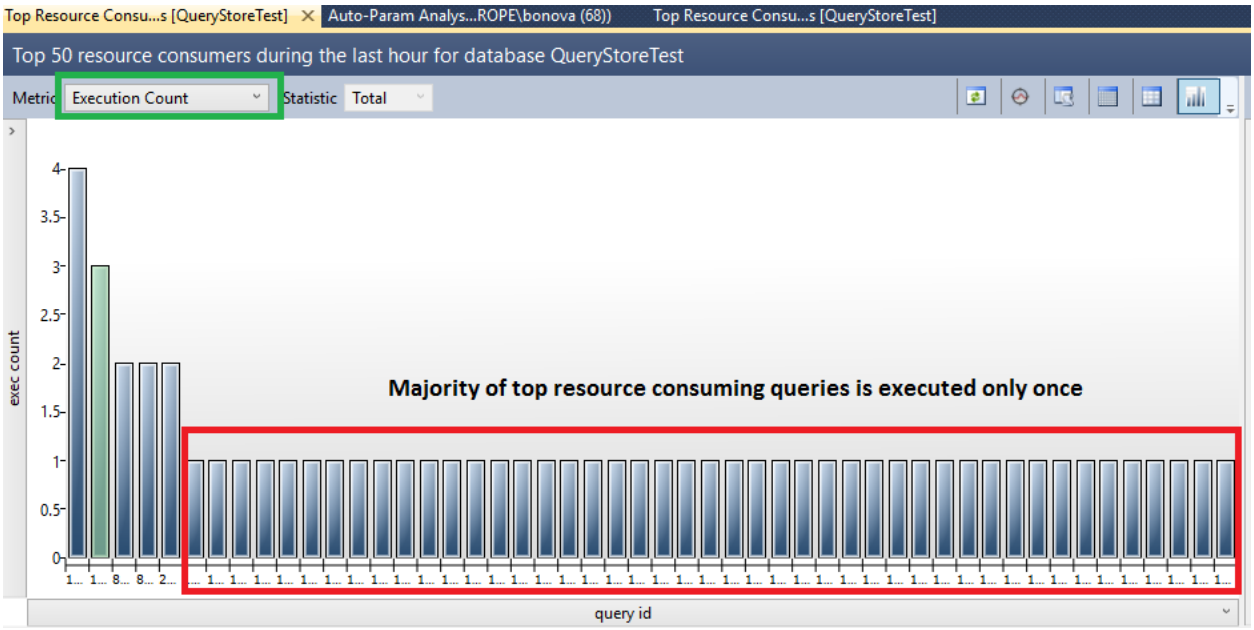


Queries With Forced Plans

- The Queries With Forced Plans view provides a quick look into the queries that have forced query plans.
- This view becomes relevant if a forced plan no longer performs as expected and needs to be reevaluated.
- This view provides the ability to review all persisted estimated execution plans for a selected query easily determining if another plan is now better suited for performance.
- If so, toolbar buttons are available to unforce a plan as required.

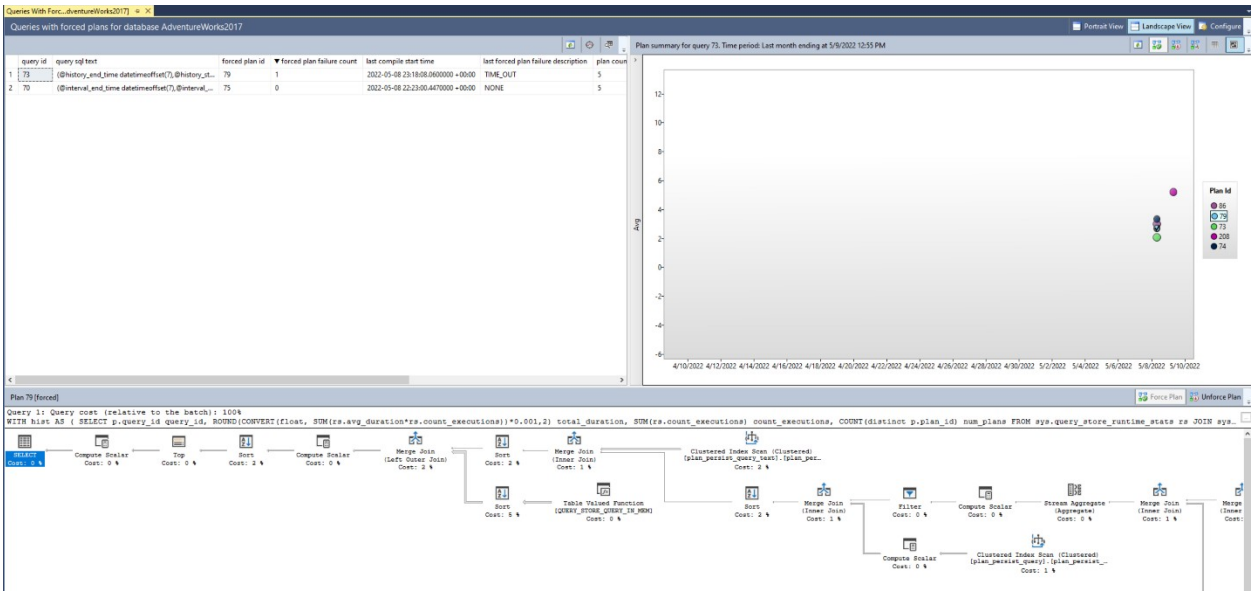


Queries With High Variation

- Query performance can vary between executions.
- The Queries with High Variation view contains an analysis of queries that have the highest variation or standard deviation for a selected metric.
- The interface is consistent with most Query Store views allowing for query detail inspection, execution plan evaluation, and optionally forcing a specific plan.
- Use this view to tune unpredictable queries into a more consistent performance pattern.

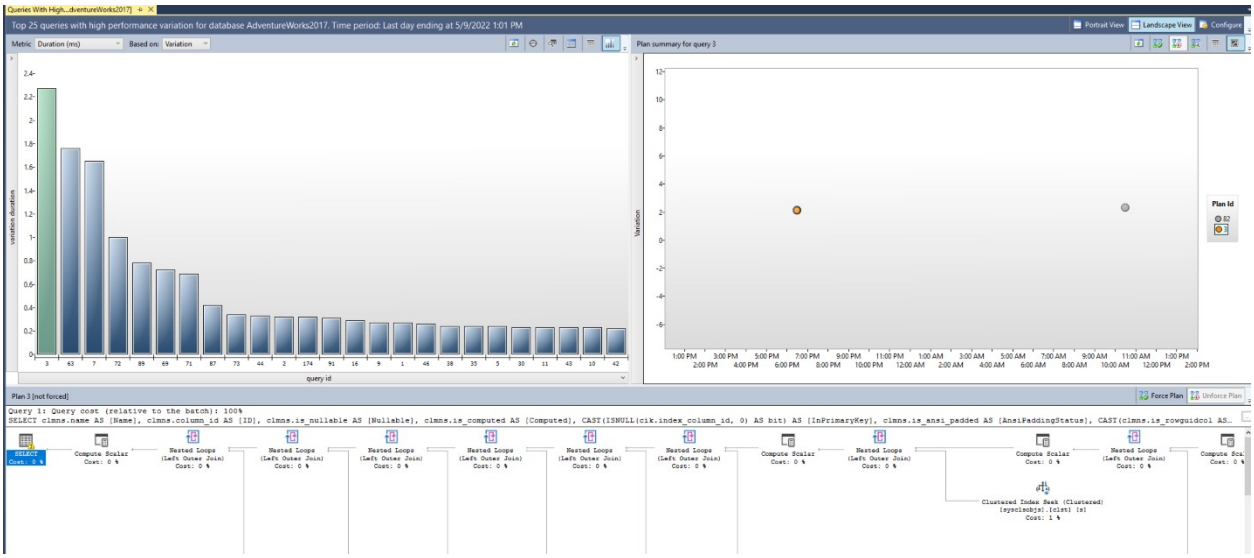

Query Wait Statistics

- The Query Wait Statistics view analyzes the most active wait categories for the database and renders a chart.
- This chart is interactive; selecting a wait category drills into the details of the queries that contribute to the wait time statistic.

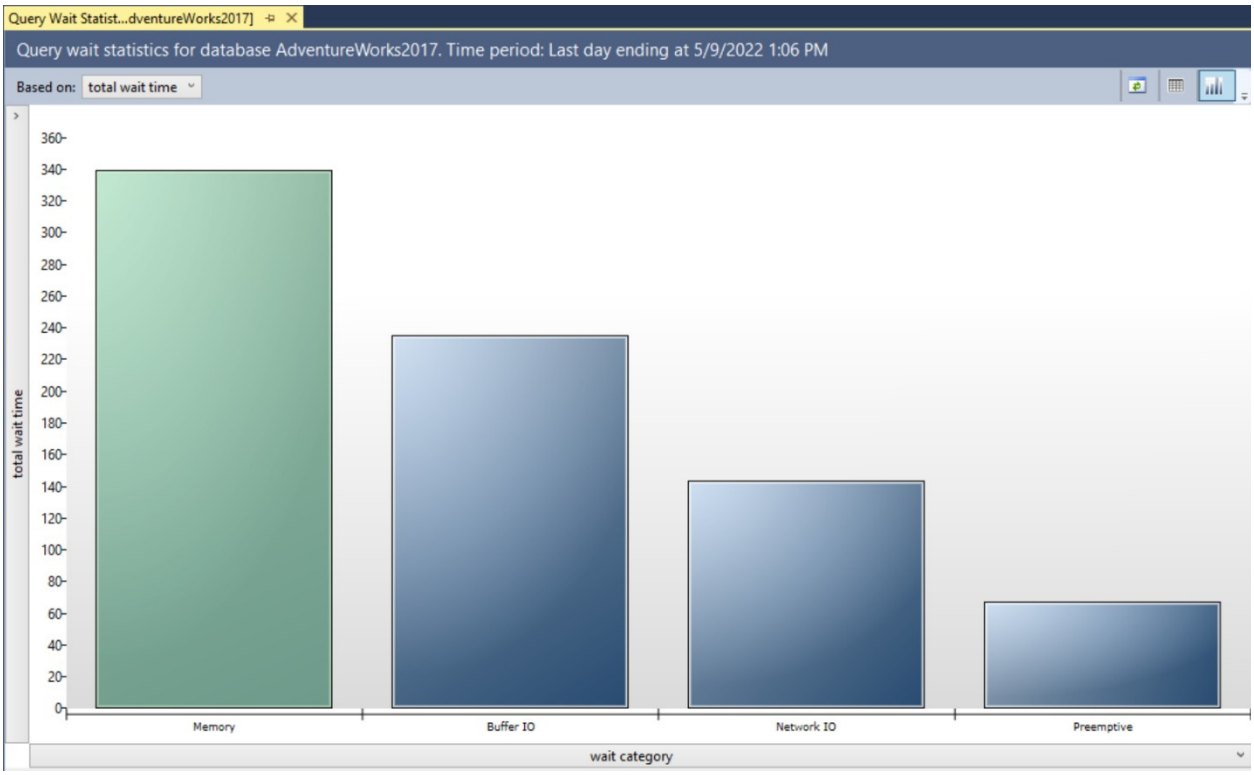


- The details view interface is also consistent with most query store views allowing for query detail inspection, execution plan evaluation, and optionally forcing a specific plan.
- This view helps identify queries that are affecting user experience across applications.

Tracking Query


- The Tracking Query view allows analyzing a specific query based on an entered query ID value.
- Once run, the view provides the complete execution history of the query.
- A checkmark on an execution indicates a forced plan was used.

- This view can provide insight into queries such as those with forced plans to verify that query performance is remaining stable.

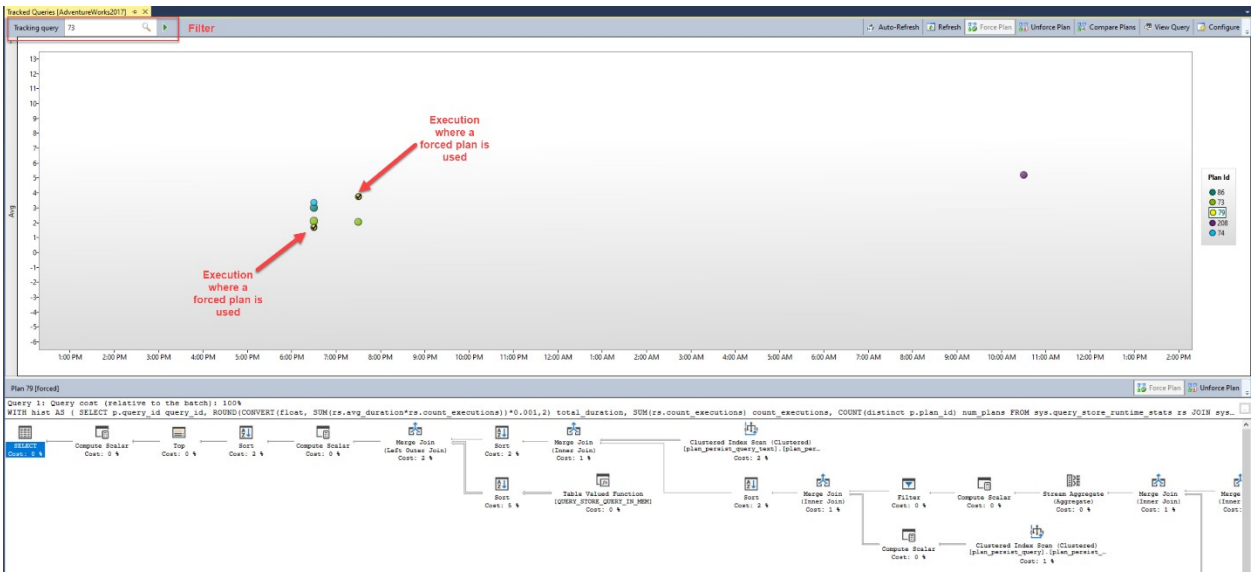


Using the Query Store to find query waits

- When the performance of a system begins to degrade, it makes sense to consult query wait statistics to potentially identify a cause.
- In addition to identifying queries that need to tune, it can also shed light on potential infrastructure upgrades that would be beneficial.
- The SQL Query Store provides the Query Wait Statistics view to provide insight into the top wait categories for the database.
- Currently, there are 24 wait categories.
- A bar chart displays the most impactful wait categories for the database when you open the Query Wait Statistics view.
- In addition, a filter located in the toolbar of the wait categories pane allows for the wait statistics to be calculated based on total wait time (default), average wait time, minimum wait time, maximum wait time, or standard deviation wait time.

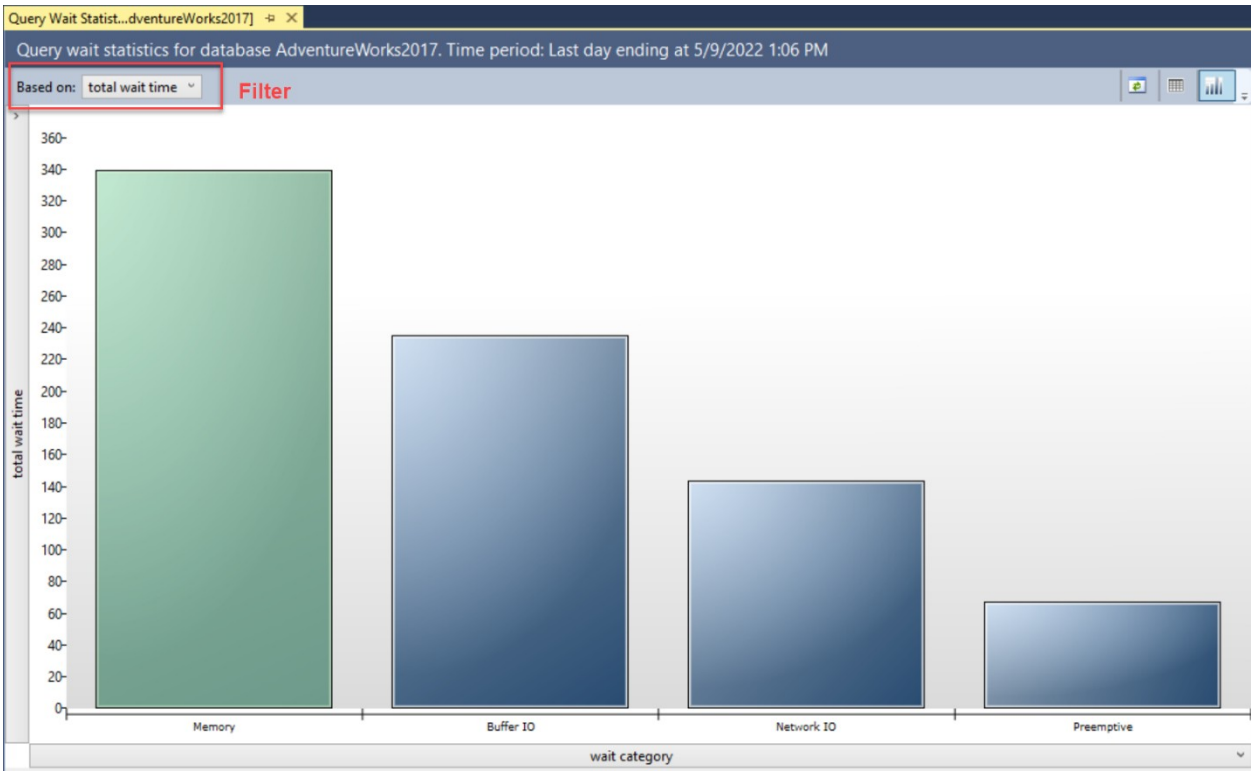

- Selecting a wait category drills through to the details of the queries that contribute to that wait category.
- From this view, you have the ability to investigate individual queries that are the most impactful.
- You can access the persisted estimated execution plans display in the Plan summary pane by selecting a query in the query pane.
- Selecting a query plan from the Plan summary pane displays the graphical query plan in the bottom pane.
- From this view, you have the ability to force or unforce a query plan for the query to improve performance.

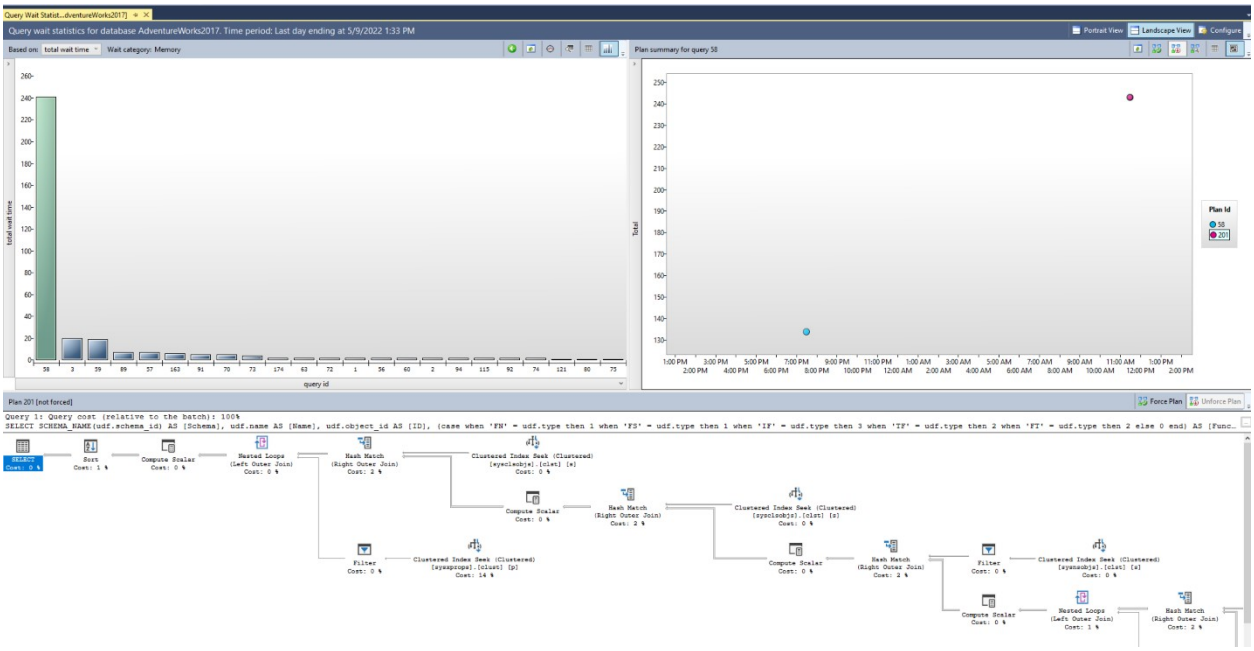

Automatic plan correction

- SQL Server 2017 and Azure SQL Database introduced the concept of automatic plan correction by analyzing data in the Query Store.
- When you enable the Query Store with a database in SQL Server 2017 (or later) and in Azure SQL Database, the SQL Server engine looks for query plan regressions and provides recommendations.

- You can see these recommendations in the sys.dm_db_tuning_recommendations dynamic management view (DMV).
- These recommendations include T-SQL statements to manually force a query plan when performance was in a good state.
- If you gain confidence in these recommendations, you can enable SQL Server to force plans automatically when regressions are encountered.
- Enable automatic plan correction by using ALTER DATABASE and the AUTOMATIC_TUNING argument.
- For Azure SQL Database, you can also enable automatic plan correction through automatic tuning options in the Azure portal or REST APIs.
- Automatic plan correction recommendations are always enabled for any database where Query Store is enabled (which is the default for Azure SQL Database and Azure SQL Managed Instance).
- For new databases, automatic plan correction (FORCE_PLAN) is enabled by default for Azure SQL Database.

Identify problematic query plans

- The typical approach DBAs take to troubleshoot query performance involves first identifying the problematic query, usually the one consuming the most system resources, and then retrieving its execution plan.
- There are two main scenarios.
- One scenario is that the query consistently performs poorly.
- This can be due to various issues, such as hardware resource constraints (though this usually doesn't affect a single query running in isolation), suboptimal query structure, database compatibility settings, missing indexes, or poor plan choices by the query optimizer.
- The second scenario is that the query performs well in some executions but poorly in others.
- This inconsistency can be caused by factors like data skew in a parameterized query, which has an efficient plan for some executions and a poor one for others.
- Other common factors include blocking, where a query waits for another query to complete to gain access to a table, or hardware contention.
- Let's explore each of these scenarios in more detail.

Hardware constraints

- Hardware constraints typically don't manifest during single query executions but become evident under production load when CPU threads and memory are limited.
- CPU contention can be detected by observing the performance monitor counter '% Processor Time', which measures server CPU usage.
- In SQL Server, SOS_SCHEDULER_YIELD and CXPACKET wait types can indicate CPU pressure.
- Poor storage system performance can slow down even optimized single query executions.
- Storage performance is best tracked at the operating system level using performance monitor counters Disk Seconds/Read and Disk Seconds/Write, which measure I/O operation completion times.
- SQL Server logs poor storage performance if an I/O takes longer than 15 seconds.
- High PAGEIOLATCH_SH waits in SQL Server can indicate storage performance issues.
- Hardware performance is typically evaluated early in the troubleshooting process due to its ease of assessment.
- Most database performance issues stem from suboptimal query patterns, which can put undue pressure on hardware.
- For example, missing indexes can lead to CPU, storage, and memory pressure by retrieving more data than necessary.
- It's recommended to address and tune suboptimal queries before tackling hardware issues.
- Next, we look at query tuning.


Suboptimal query constructs

- Relational databases perform best when executing set-based operations, which manipulate data (INSERT, UPDATE, DELETE, and SELECT) in sets, producing either a single value or a result set.


- The alternative is row-based processing, using cursors or while loops, which increase cost linearly with the number of rows impacted—a problematic scale as data volumes grow.
- Detecting suboptimal use of row-based operations with cursors or WHILE loops is important, but there are other SQL Server anti-patterns to recognize.
- Table-valued functions (TVFs), particularly multi-statement TVFs, caused problematic execution plan patterns before SQL Server 2017.
- Developers often use multi-statement TVFs to execute multiple queries within a single function and aggregate results into a single table.
- However, using TVFs can lead to performance penalties.
- SQL Server has two types of TVFs: inline and multi-statement.
- Inline TVFs are treated like views, while multi-statement TVFs are treated like tables during query processing.
- Because TVFs are dynamic and lack statistics, SQL Server uses a fixed row count for estimating query plan cost.
- This can be fine for small row counts, but inefficient for thousands or millions of rows.
- Another anti-pattern is the use of scalar functions, which have similar estimation and execution problems.
- Microsoft has made significant performance improvements with Intelligent Query Processing, under compatibility levels 140 and 150.

SARGability

- The term SARGable in relational databases refers to a predicate (WHERE clause) formatted to use an index to speed up query execution.
- Predicates in the correct format are called 'Search Arguments' or SARGs.
- In SQL Server, using a SARG means the optimizer evaluates using a nonclustered index on the column referenced in the SARG for a SEEK operation, instead of scanning the entire index or table to retrieve a value.
- The presence of a SARG doesn't guarantee the use of an index for a SEEK.
- The optimizer’s costing algorithms could still determine that the index is too expensive, especially if a SARG refers to a large percentage of rows in a table.
- The absence of a SARG means the optimizer won't evaluate a SEEK on a nonclustered index.
- Examples of non-SARGable expressions include those with a LIKE clause using a wildcard at the beginning of the string, such as WHERE lastName LIKE '%SMITH%'.
- Other non-SARGable predicates occur when using functions on a column, like WHERE CONVERT(CHAR(10), CreateDate,121) = '2020-03-22'.
- These queries are typically identified by examining execution plans for index or table scans where seeks should otherwise occur.

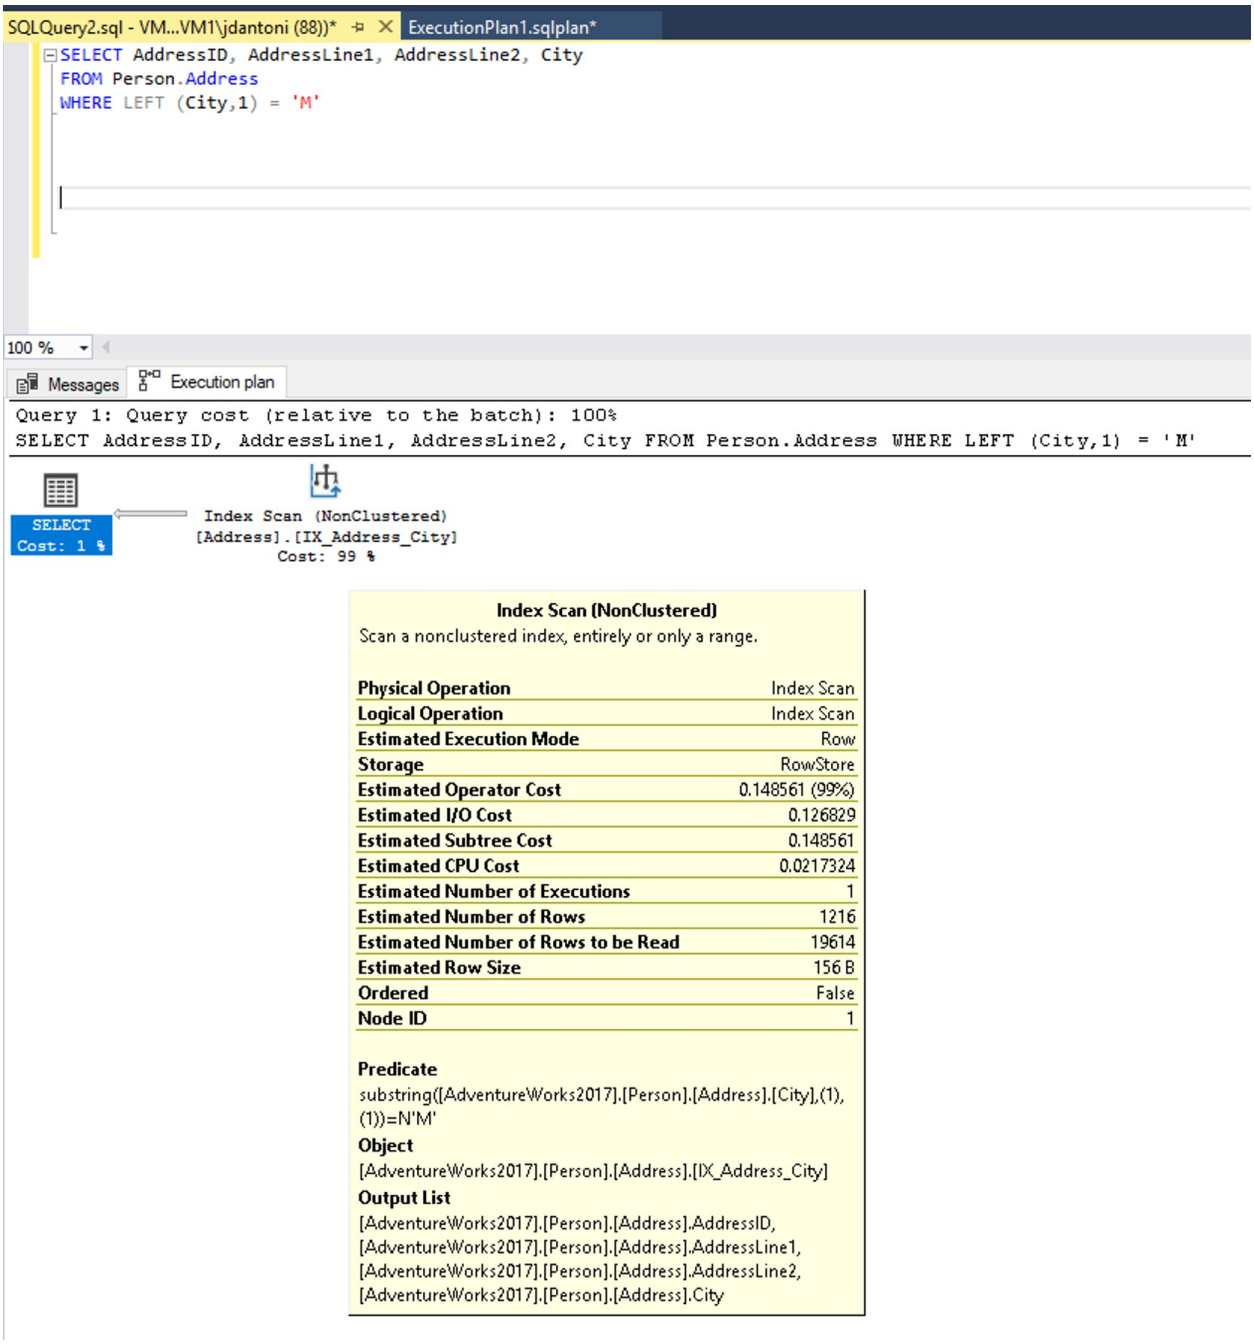

- There's an index on the City column that is being used in the WHERE clause of the query and while it's being used in this execution plan above, you can see the index is being scanned, which means the entire index is being read.
- The LEFT function in the predicate makes this expression non-SARGable.
- The optimizer won't evaluate using an index seek on the index on the City column.
- This query could be written to use a predicate that is SARGable.
- The optimizer would then evaluate a SEEK on the index on the City column.
- An index seek operator, in this case, would read a smaller set of rows.

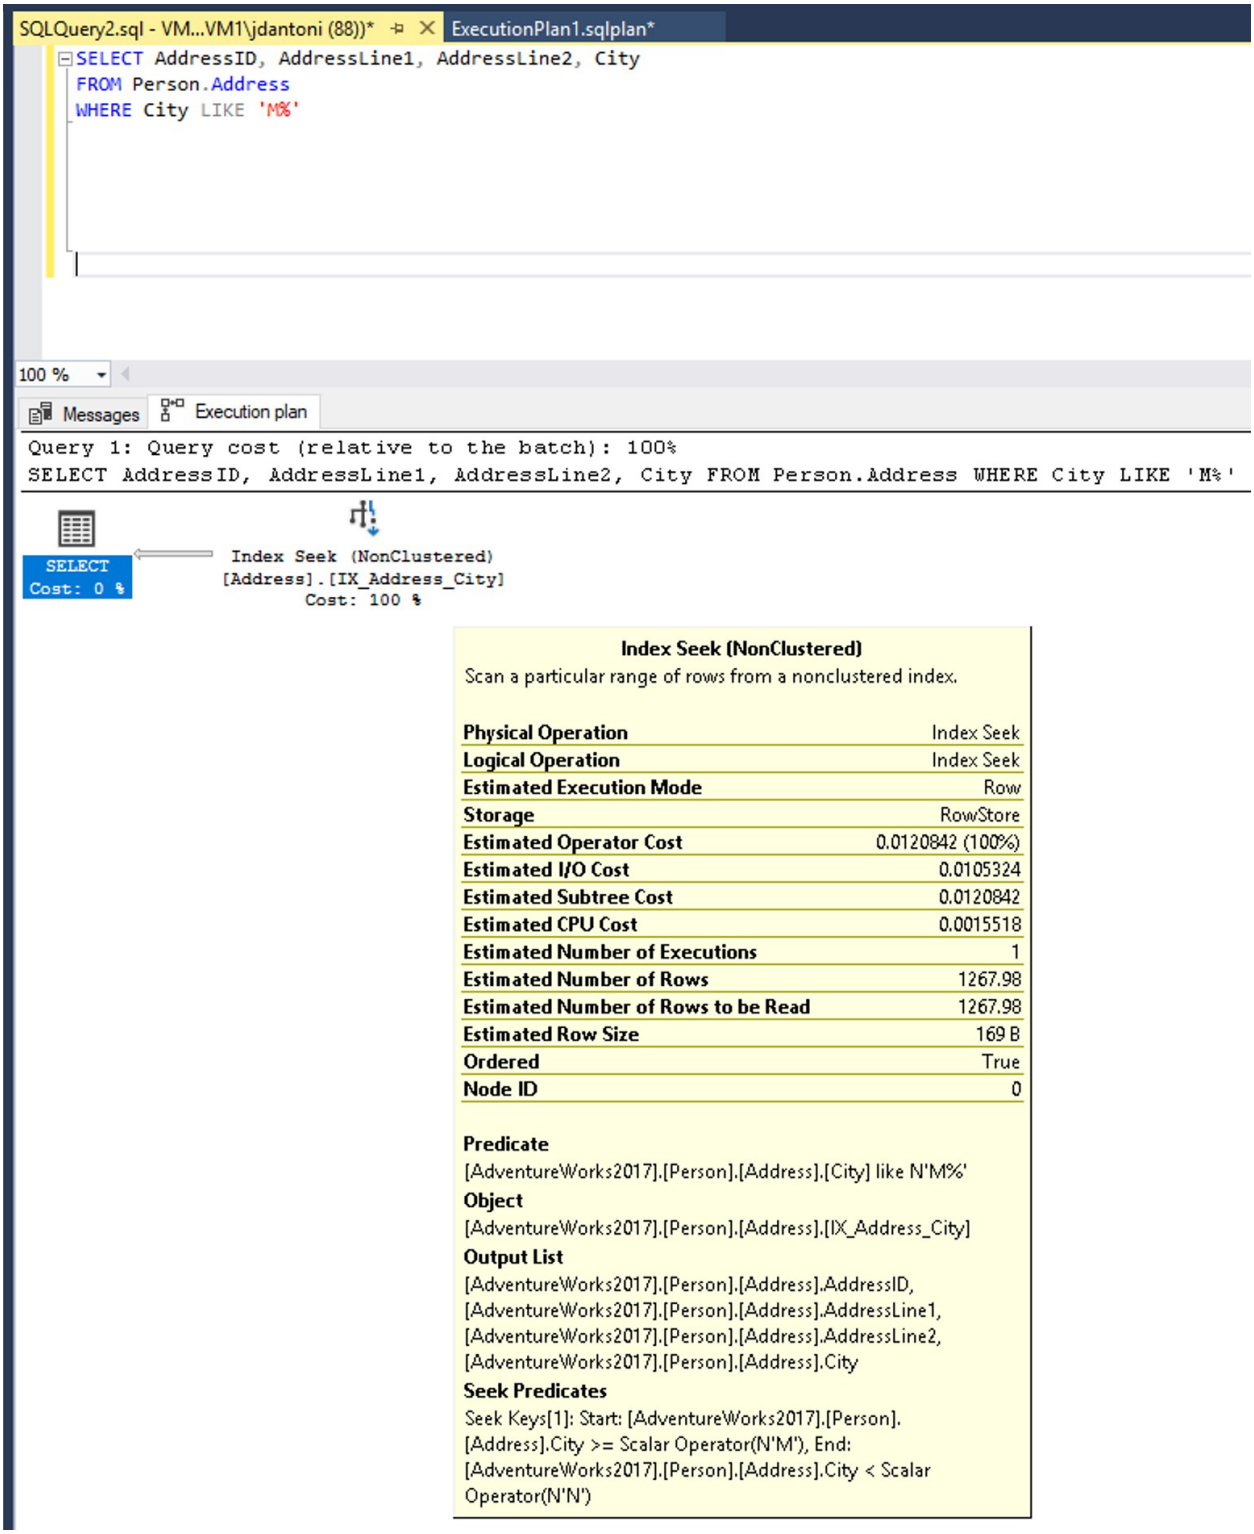

- Changing LEFT function into a LIKE results in an index seek.

Note

- The LIKE keyword, in this example, doesn't have a wildcard on the left, so it's looking for cities that begin with M.
- If it was “two-sided” or started with a wildcard ('%M%' or '%M') it would be non-SARGable.
- The seek operation is estimated to return 1,267 rows, or approximately 15% of the estimate for the query with the non-SARGable predicate.
- Some other database development anti-patterns are treating the database as a service rather than a data store.

- Using a database to convert data to JSON, manipulate strings, or perform complex calculations can lead to excessive CPU use and increased latency.
- Queries that try to retrieve all records and then perform computations in the database can lead to excessive IO and CPU usage.
- Ideally, you should use the database for data access operations and optimized database constructs like aggregation.

Missing indexes

- The most common performance problems for database administrators stem from a lack of useful indexes, causing the engine to read more pages than necessary to return query results.
- While indexes consume resources (affecting write performance and consuming space), their performance gains often outweigh the extra resource costs.
- Execution plans with these issues can be identified by the query operator Clustered Index Scan or the combination of Nonclustered Index Seek and Key Lookup, indicating missing columns in an existing index.
- The database engine helps by reporting missing indexes in execution plans.
- The names and details of recommended indexes are available through the dynamic management view sys.dm_db_missing_index_details.
- Other DMVs like sys.dm_db_index_usage_stats and sys.dm_db_index_operational_stats highlight the utilization of existing indexes.
- Dropping an unused index can be sensible.
- Missing index DMVs and plan warnings should be starting points for tuning queries.
- It's crucial to understand key queries and build indexes to support them.
- Creating all missing indexes without evaluating them in context isn't recommended.

Missing and out-of-date statistics

- Understanding the importance of column and index statistics to the query optimizer is crucial.
- It's also essential to recognize conditions that can lead to out-of-date statistics and how this issue can manifest in SQL Server.
- Azure SQL offerings default to having autoupdate statistics set to ON.
- Before SQL Server 2016, the default behavior of autoupdate statistics was to not update statistics until the number of modifications to columns in the index equaled about 20% of the number of rows in a table.
- This behavior could result in significant data modifications that change query performance without updating the statistics, leading to suboptimal plans based on outdated statistics.
- Before SQL Server 2016, trace flag 2371 could be used to change the required number of modifications to a dynamic value, so as your table grew, the percentage of row modifications needed to trigger a statistics update decreased.
- Newer versions of SQL Server, Azure SQL Database, and Azure SQL Managed Instance support this behavior by default.
- The dynamic management function sys.dm_db_stats_properties shows the last time statistics were updated and the number of modifications since the last update, allowing you to quickly identify statistics that might need manual updates.

Poor optimizer choices

- While the query optimizer does a good job of optimizing most queries, there are some edge cases where the cost-based optimizer can make impactful decisions that aren't fully understood.
- There are many ways to address this including using query hints, trace flags, execution plan forcing, and other adjustments in order to reach a stable and optimal query plan.
- Microsoft has a support team that can help troubleshoot these scenarios.
- In the below example from the AdventureWorks2017 database, a query hint is being use to tell the database optimizer to always use a city name of Seattle.
- This hint won't guarantee the best execution plan for all city values, but it's predictable.
- The value of ‘Seattle’ for @city_name will only be used during optimization.

- During execution, the actual supplied value (‘Ascheim’) is used.

```
SQL
DECLARE @city_name nvarchar(30) = 'Ascheim',
@postal_code nvarchar(15) = 86171;

SELECT *
FROM Person.Address
WHERE City = @city_name
AND PostalCode = @postal_code
OPTION (OPTIMIZE FOR (@city_name = 'Seattle');
```

- As seen in the example, the query uses a hint (the OPTION clause) to tell the optimizer to use a specific variable value to build its execution plan.

Parameter sniffing

- SQL Server caches query execution plans for future use.
- Since the execution plan retrieval process is based on the hash value of a query, the query text has to be identical for every execution of the query for the cached plan to be used.
- In order to support multiple values in the same query, many developers use parameters, passed in through stored procedures, as seen in the following example:

```
SQL
CREATE PROC GetAccountID (@Param INT)
AS
<other statements in procedure>
SELECT accountid FROM CustomerSales WHERE sales > @Param;
<other statements in procedure>
RETURN;

-- Call the procedure:
EXEC GetAccountID 42;
```

- Queries can also be explicitly parameterized using the procedure sp_executesql.
- However, explicit parameterization of individual queries is done through the application with some form (depending on the API) of PREPARE and EXECUTE.
- When the database engine executes that query for the first time, it optimizes the query based on the initial value of the parameter, in this case, 42.
- This behavior, called parameter sniffing, allows for the overall workload of compiling queries to be reduced on the server.
- However, if there's data skew, query performance could vary widely.
- For example, a table that had 10 million records, and 99% of those records have an ID of 1, and the other 1% are unique numbers, performance is based on which ID was initially used to optimize the query.
- This wildly fluctuating performance is indicative of data skew and isn't an inherent problem with parameter sniffing.

- This behavior is a fairly common performance problem that you should be aware of.
- You should understand the options for alleviating the issue.
- There a few ways to address this problem, but they each come with tradeoffs:
- Use the RECOMPILE hint in your query, or the WITH RECOMPILE execution option in your stored procedures.
- This hint causes the query or procedure to be recompiled every time it's executed, which will increase CPU utilization on the server but will always use the current parameter value.
- You can use the OPTIMIZE FOR UNKNOWN query hint.
- This hint causes the optimizer to choose to not sniff parameters and compare the value with column data histogram.
- This option won't get you the best possible plan but will allow for a consistent execution plan.
- Rewrite your procedure or queries by adding logic around parameter values to only RECOMPILE for known troublesome parameters.
- In the example below, if the SalesPersonID parameter is NULL, the query is executed with the OPTION (RECOMPILE).

```
SQL
CREATE OR ALTER PROCEDURE GetSalesInfo (@SalesPersonID INT = NULL)
AS
DECLARE  @Recompile BIT = 0
, @SQLString NVARCHAR(500)

SELECT @SQLString = N'SELECT SalesOrderId, OrderDate FROM Sales.SalesOrderHeader WHERE SalesPersonID =
@SalesPersonID'

IF @SalesPersonID IS NULL
BEGIN
  SET @Recompile = 1
END

IF @Recompile = 1
BEGIN
 SET @SQLString = @SQLString + N' OPTION(RECOMPILE)'
END

EXEC sp_executesql @SQLString
,N'@SalesPersonID INT'
,@SalesPersonID = @SalesPersonID
GO
```

- This example is a good solution but it does require a fairly large development effort, and a firm understanding of your data distribution.
- It requires maintenance as the data changes.

Describe blocking and locking

- Locking is a key feature of relational databases, essential for maintaining the atomicity, consistency, and isolation properties of the ACID model.
- All RDBMSs block actions that would violate the consistency and isolation of database writes.
- SQL programmers must start and end transactions at the right points to ensure data consistency.

- The database engine provides locking mechanisms to protect the logical consistency of the affected tables, which is foundational to the relational model.
- In SQL Server, blocking occurs when one process holds a lock on a specific resource (row, page, table, database), and a second process attempts to acquire a lock with an incompatible lock type on the same resource.
- Typically, locks are held for a short period, and once the process holding the lock releases it, the blocked process can acquire the lock and complete its transaction.
- SQL Server locks the smallest amount of data needed to complete a transaction, allowing for maximum concurrency.
- For example, if SQL Server locks a single row, all other rows in the table remain available for other processes, enabling concurrent work.
- However, each lock requires memory resources, so it's not cost-effective for one process to hold thousands of individual locks on a single table.
- To balance concurrency with cost, SQL Server uses a technique called lock escalation.
- If more than 5,000 rows on a single object need to be locked in a single statement, SQL Server escalates the multiple row locks to a single table lock.
- Locking is a normal behavior and occurs frequently throughout the day.
- It only becomes problematic when it causes blocking that isn't quickly resolved.
- There are two types of performance issues caused by blocking:
- A process holds locks on a set of resources for an extended period before releasing them, causing other processes to block and degrading query performance and concurrency.
- A process acquires locks on a set of resources and never releases them, requiring administrator intervention to resolve.
- Deadlocking is another blocking scenario that occurs when one transaction holds a lock on a resource, and another transaction holds a lock on a different resource.
- Each transaction then attempts to acquire a lock on the resource currently locked by the other transaction, leading to an infinite wait as neither transaction can complete.
- The SQL Server engine detects these scenarios and resolves the deadlock by killing one of the transactions, based on which transaction has performed the least amount of work that needs to be rolled back.
- The transaction that is killed is known as the deadlock victim.
- Deadlocks are recorded in the system_health extended event session, which is enabled by default.
- It's important to understand the concept of a transaction.
- Autocommit is the default mode of SQL Server and Azure SQL Database, which means the changes made by the following statement would automatically be recorded in the database's transaction log.

SQL

```
INSERT INTO DemoTable (A) VALUES (1);
```

- In order to allow developers to have more granular control over their application code, SQL Server also allows you to explicitly control your transactions.
- The following query would take a lock on a row in the DemoTable table that wouldn't be released until a subsequent command to commit the transaction was added.

SQL

```
BEGIN TRANSACTION

INSERT INTO DemoTable (A) VALUES (1);
```

- The proper way to write the following query is as follows:

SQL

```
BEGIN TRANSACTION

INSERT INTO DemoTable (A) VALUES (1);
```

COMMIT TRANSACTION

- The COMMIT TRANSACTION command explicitly commits a record of the changes to the transaction log.
- The changed data will eventually make its way into the data file asynchronously.
- These transactions represent a unit of work to the database engine.
- If the developer forgets to issue the COMMIT TRANSACTION command, the transaction stays open and the locks won't be released.
- This is one of the main reasons for long running transactions.
- The other mechanism the database engine uses to help the concurrency of the database is row versioning.
- When a row versioning isolation level is enabled to the database, the engine maintains versions of each modified row in TempDB.
- This is typically used in mixed use workloads, in order to prevent reading queries from blocking queries that are writing to the database.
- To monitor open transactions awaiting commit or rollback run the following query:

```
SQL
SELECT tst.session_id, [database_name] = db_name(s.database_id)
```

, tat.transaction_begin_time

- , transaction_duration_s = datediff(s, tat.transaction_begin_time, sysdatetime())
- , transaction_type = CASE tat.transaction_type WHEN 1 THEN 'Read/write transaction'

WHEN 2 THEN 'Read-only transaction'

WHEN 3 THEN 'System transaction'

WHEN 4 THEN 'Distributed transaction' END

- , input_buffer = ib.event_info, tat.transaction_uow
- , transaction_state = CASE tat.transaction_state
- WHEN 0 THEN 'The transaction has not been completely initialized yet.'
- WHEN 1 THEN 'The transaction has been initialized but has not started.'
- WHEN 2 THEN 'The transaction is active - has not been committed or rolled back.'
- WHEN 3 THEN 'The transaction has ended.
- This is used for read-only transactions.'
- WHEN 4 THEN 'The commit process has been initiated on the distributed transaction.'
- WHEN 5 THEN 'The transaction is in a prepared state and waiting resolution.'
- WHEN 6 THEN 'The transaction has been committed.'
- WHEN 7 THEN 'The transaction is being rolled back.'
- WHEN 8 THEN 'The transaction has been rolled back.' END
- , transaction_name = tat.name, request_status = r.status

, tst.is_user_transaction, tst.is_local

- , session_open_transaction_count = tst.open_transaction_count
- , s.host_name, s.program_name, s.client_interface_name, s.login_name, s.is_user_process

  FROM sys.dm_tran_active_transactions tat

  INNER JOIN sys.dm_tran_session_transactions tst on tat.transaction_id = tst.transaction_id

  INNER JOIN Sys.dm_exec_sessions s on s.session_id = tst.session_id

  LEFT OUTER JOIN sys.dm_exec_requests r on r.session_id = s.session_id
- CROSS APPLY sys.dm_exec_input_buffer(s.session_id, null) AS ib

```
ORDER BY tat.transaction_begin_time DESC;
```

Isolation levels

- SQL Server offers several isolation levels to allow you to define the level of consistency and correctness you need guaranteed for your data.
- Isolation levels let you find a balance between concurrency and consistency.
- The isolation level doesn't affect the locks taken to prevent data modification.
- A transaction will always get an exclusive lock on the data that is modifying.
- However, your isolation level can affect the length of time that your locks are held.
- Lower isolation levels increase the ability of multiple user process to access data at the same time, but increase the data consistency risks that can occur.
- The isolation levels in SQL Server are as follows:
- Read uncommitted – Lowest isolation level available.
- Dirty reads are allowed, which means one transaction may see changes made by another transaction that haven't yet been committed.
- Read committed – allows a transaction to read data previously read, but not modified by another transaction with without waiting for the first transaction to finish.
- This level also releases read locks as soon as the select operation is performed.
- This is the default SQL Server level.
- Repeatable Read – This level keeps read and write locks that are acquired on selected data until the end of the transaction.
- Serializable – This is the highest level of isolation where transactions are isolated.
- Read and write locks are acquired on selected data and not released until the end of the transaction.
- SQL Server also includes two isolation levels that include row-versioning.
- Read Committed Snapshot – In this level read operations take no row or page locks, and the engine presents each operation with a consistent snapshot of the data as it existed at the start of the query.
- This level is typically used when users are running frequent reporting queries against an OLTP database, in order to prevent the read operations from blocking the write operations.
- Snapshot – This level provides transaction level read consistency through row versioning.
- This level is vulnerable to update conflicts.
- If a transaction running under this level reads data modified by another transaction, an update by the snapshot transaction will be terminated and roll back.
- This isn't an issue with read committed snapshot isolation.
- Isolation levels are set for each session with the T-SQL SET command, as shown:

```
SQL
SET TRANSACTION ISOLATION LEVEL

{ READ UNCOMMITTED

| READ COMMITTED

| REPEATABLE READ

| SNAPSHOT

| SERIALIZABLE
```

}

- There's no way to set a global isolation level all queries running in a database, or for all queries run by a particular user.
- It's a session level setting.

Monitoring for blocking problems

- Identifying blocking problems can be challenging due to their sporadic nature.
- The DMV sys.dm_tran_locks, when joined with sys.dm_exec_requests, provides information on the locks held by each session.
- A more effective way to monitor blocking problems is to use the Extended Events engine on an ongoing basis.
- Blocking problems typically fall into two categories:
- Poor transactional design: For example, a transaction without a COMMIT TRANSACTION will never end.
- Trying to do too much work in a single transaction or having a distributed transaction using a linked server connection can lead to unpredictable performance.
- Long-running transactions caused by schema design: This often involves an update on a column with a missing index or a poorly designed update query.
- Monitoring for locking-related performance problems allows you to quickly identify performance degradation related to locking.
- For more information about how to monitor blocking, see Understand and resolve SQL Server blocking problems.

Exercise: Identify and resolve blocking issues

- In this exercise, you'll learn how to identify and troubleshoot blocking issues using SQL Server Management Studio (SSMS).

Note

- To complete this exercise, you'll need an Azure subscription.
- Launch the exercise and follow the instructions.

Launch Exercise

Summary

- **1 minute**
- Database performance is determined by how execution plans work and how indexes are used.
- At the same time, you need to understand patterns and anti-patterns for relational databases and aim for good query choices and proper indexing.
- Query Store acts as a data recorder for the database engine, and it is focused on query performance and changes in execution plans.

Additional reading

Azure SQL Database overviewAzure SQL Database overview

Live Query StatisticsLive Query Statistics

- Best practices for monitoring workloads with Query Store

How Query Store collects dataHow Query Store collects data

Explore performance-based database design

Intermediate

Data Analyst

Data Engineer

Database Administrator

Developer

Azure SQL Database

SQL Server

- Explore normalization for relational databases.
- Investigate the impact of proper datatype usage.
- Compare types of indexes.

Learning objectives

- After completing this module, you will be able to:
- Explore normal forms and how they affect database design
- **Choose appropriate datatypes for your data**
- **Evaluate appropriate index types**

Introduction

- **1 minute**
- Database design plays a crucial role in determining the performance of a database, even though it may not always be within the control of the database administrator.
- Often, you might find yourself working with third-party vendor applications that you didn't develop.
- In such cases, it becomes essential to understand the underlying design principles and make necessary adjustments to optimize performance.
- Proper database design ensures that the system can handle the expected workload efficiently, whether it's an online transaction processing (OLTP) system or a data warehouse.
- By aligning the design with the specific needs of the workload, you can significantly enhance the overall performance and responsiveness of the database.
- Whenever possible, it's important to design your database with the workload in mind.
- For OLTP systems, the focus should be on minimizing transaction times and ensuring data integrity.
- This involves designing tables and indexes that support quick lookups and updates.
- On the other hand, data warehouse workloads require a design that facilitates complex queries and large-scale data analysis.
- This might involve denormalizing tables to reduce the number of joins required for queries or using partitioning to manage large datasets effectively.
- By tailoring the design to the specific workload, you can ensure that the database performs optimally under various conditions.
- Many design decisions can have a profound impact on database performance.
- One such decision is the choice of datatypes for columns.
- Selecting the appropriate datatype can reduce storage requirements and improve query performance.
- For example, using integer types for numeric data instead of character types can lead to faster processing and reduced storage space.

- Additionally, proper indexing strategies can greatly enhance query performance by allowing the database engine to quickly locate the required data.
- By carefully considering these and other design aspects, you can create a database that not only meets the functional requirements but also performs efficiently and reliably.

Describe normalization

- Database normalization is a design process used to organize data into tables and columns within a database.
- Each table should contain data related to a specific entity and only include information that supports that entity.
- The primary goal of normalization is to minimize duplicate data within the database, which helps prevent performance degradation during inserts and updates.
- For example, if a customer's address needs to be updated, it's simpler to implement the change if the address is stored in a single location, such as the Customers table.
- The most common forms of normalization are first, second, and third normal forms.

First normal form

- First normal form has the following specifications:
- Create a separate table for each set of related data
- Eliminate repeating groups in individual tables
- Identify each set of related data with a primary key
- In this model, you should avoid using multiple columns in a single table to store similar data.
- For example, if a product can come in multiple colors, you shouldn't have multiple columns in a single row containing the different color values.
- The first following table, ProductColors, isn't in first normal form because it has repeating values for color.
- For products with only one color, there's wasted space.
- Additionally, if a product comes in more than three colors, it becomes impractical to set a maximum number of columns.
- Instead, we can recreate the table as shown in the second table, ProductColor.
- First normal form also requires that there's a unique key for the table, which is a column (or columns) whose value uniquely identifies each row.
- In the second table, neither of the columns is unique on its own, but together, the combination of ProductID and Color forms a unique key.
- When multiple columns are needed to create a unique key, it's referred to as a composite key.

- **ProductColors table:**

ProductID	Color1	Color2	Color3
1	Red	Green	Yellow
2	Yellow		
3	Blue	Red	
4	Blue		
5	Red		

- **ProductColor table:**

ProductID	Color
1	Red

ProductID	Color
1	Green
1	Yellow
2	Yellow
3	Blue
3	Red
4	Blue
5	Red

- The third table, ProductInfo, is in first normal form because each row refers to a particular product, there are no repeating groups, and we have the column ProductID to use as a Primary Key.

ProductID	ProductName	Price	ProductionCountry	ShortLocation
1	Widget	15.95	United States	US
2	Foop	41.95	United Kingdom	UK
3	Glombit	49.95	United Kingdom	UK
4	Sorfin	99.99	Republic of the Philippines	RepPhil
5	Stem Bolt	29.95	United States	US

Second normal form

- Second normal form has the following specification, in addition to those required by first normal form:
- If the table has a composite key, all attributes must depend on the complete key and not just part of it.
- Second normal form is only relevant to tables with composite keys, like in the table ProductColor, which is the second table.
- Consider the case where the ProductColor table also includes the product's price.
- This table has a composite key on ProductID and Color, because only using both column values can we uniquely identify a row.
- If a product's price doesn't change with the color, we might see data as shown in this table.

ProductID	Color	Price
1	Red	15.95
1	Green	15.95
1	Yellow	15.95
2	Yellow	41.95
3	Blue	49.95
3	Red	49.95
4	Blue	99.95

ProductID	Color	Price
5	Red	29.95

- This table isn't in second normal form.
- The price value is dependent on the ProductID but not on the Color.
- There are three rows for ProductID 1, so the price for that product is repeated three times.
- The issue with violating second normal form is that if we need to update the price, we must ensure it's updated everywhere.
- If we update the price in the first row but not in the second or third, we would encounter an update anomaly.
- After the update, we wouldn't be able to determine the actual price for ProductID 1.
- The solution is to move the Price column to a table that has ProductID as a single column key, because that is the only column that Price depends on.
- For example, we could use Table 3 to store the Price.
- If the price for a product was different based on its color, the fourth table would be in the second normal form, since the price would depend on both parts of the key: the ProductID and the Color.

Third normal form

- Third normal form is typically the aim for most OLTP databases.
- Third normal form has the following specification, in addition to those required by second normal form:
- All nonkey columns are nontransitively dependent on the primary key.
- A transitive relationship implies that one column in a table is related to other columns through a second column.
- Dependency means that a column can derive its value from another as a result of this relationship.
- For example, your age can be determined from your date of birth, making your age dependent on your date of birth.
- Refer back to the third table, ProductInfo.
- This table is in second normal form but not in third.
- The ShortLocation column is dependent on the ProductionCountry column, which isn't the key.
- Like second normal form, violating third normal form can lead to update anomalies.
- We would end up with inconsistent data if we updated the ShortLocation in one row but didn't update it in all the rows where that location occurred.
- To prevent this, we could create a separate table to store country/region names and their shortened forms.


Denormalization

- While the third normal form is theoretically desirable, it isn't always possible for all data.
- In addition, a normalized database doesn't always give you the best performance.
- Normalized data frequently requires multiple join operations to get all the necessary data returned in a single query.
- There's a tradeoff between normalizing data when the number of joins required to return query results has high CPU utilization, and denormalized data that has fewer joins and less CPU required, but opens up the possibility of update anomalies.
- Denormalized data can be more efficient to query, especially for read heavy workloads like a data warehouse.
- In those cases, having extra columns may offer better query patterns and/or more simplistic queries.


Star schema

- While most normalization is aimed at OLTP workloads, data warehouses have their own modeling structure, which is typically a denormalized model.
- This design uses fact tables to record measurements or metrics for specific events, such as sales, and joins them to dimension tables.

- Dimension tables are smaller in terms of row count but may have a large number of columns to describe the fact data.
- Examples of dimensions include inventory, time, and geography.
- This design pattern makes the database easier to query and offers performance gains for read workloads.

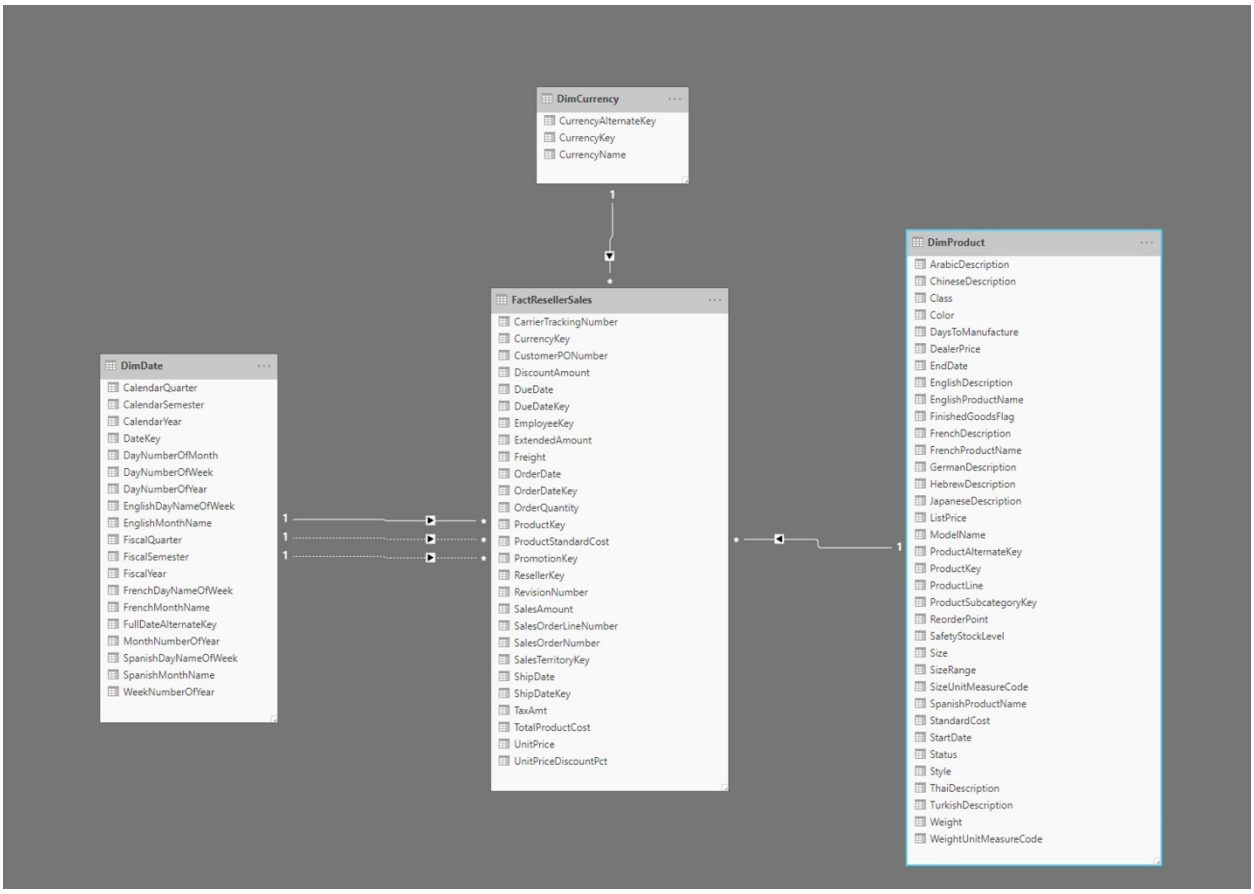

- The image illustrates an example of a star schema, featuring a FactResellerSales fact table and dimensions for date, currency, and products.
- The fact table contains data related to sales transactions, while the dimensions only contain data related to specific elements of the sales data.
- For instance, the FactResellerSales table includes only a ProductKey to indicate which product was sold.
- All the details about each product are stored in the DimProduct table and are related back to the fact table using the ProductKey column.
- Related to star schema design is the snowflake schema, which uses a set of more normalized tables for a single business entity.
- The following image illustrates an example of a single dimension in a snowflake schema.
- The Products dimension is normalized and stored across three tables: DimProductCategory, DimProductSubcategory, and DimProduct.

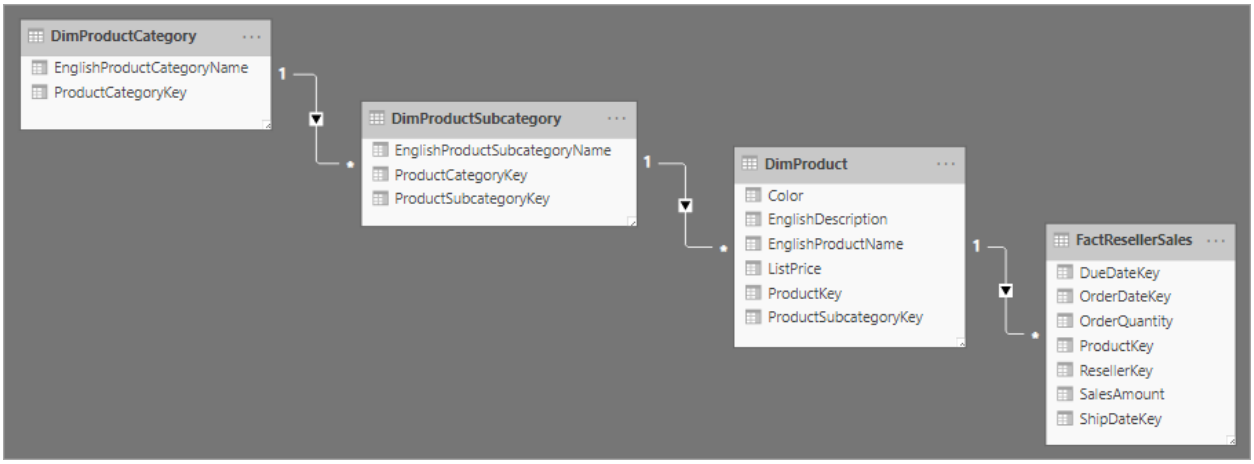


- The main difference between star and snowflake schemas is that the dimensions in a snowflake schema are normalized to reduce redundancy, which saves storage space.
- The tradeoff is that your queries require more joins, which can increase your complexity and decrease performance.

Choose appropriate data types

- SQL Server offers a wide variety of data types, and your choice can significantly impact performance.
- While SQL Server can automatically convert some data types (known as 'implicit conversion'), this process can be costly and negatively affect query plans.
- The alternative is explicit conversion, where you use the CAST or CONVERT function in your code to force a data type conversion.
- Also, choosing data types that are larger than necessary can lead to wasted space and require more pages to be read.
- It's crucial to select the appropriate data types for your data, as this will reduce the total storage required for the database and improve query performance.

Note

- In some cases, conversions aren't possible at all.
- For example, a date can't be converted to a bit.
- Conversions can negatively impact query performance by causing index scans where seeks would have been possible, and extra CPU overhead from the conversion itself.
- The following image indicates in which cases SQL Server can do an implicit conversion and in which cases you must explicitly convert data types in your code.

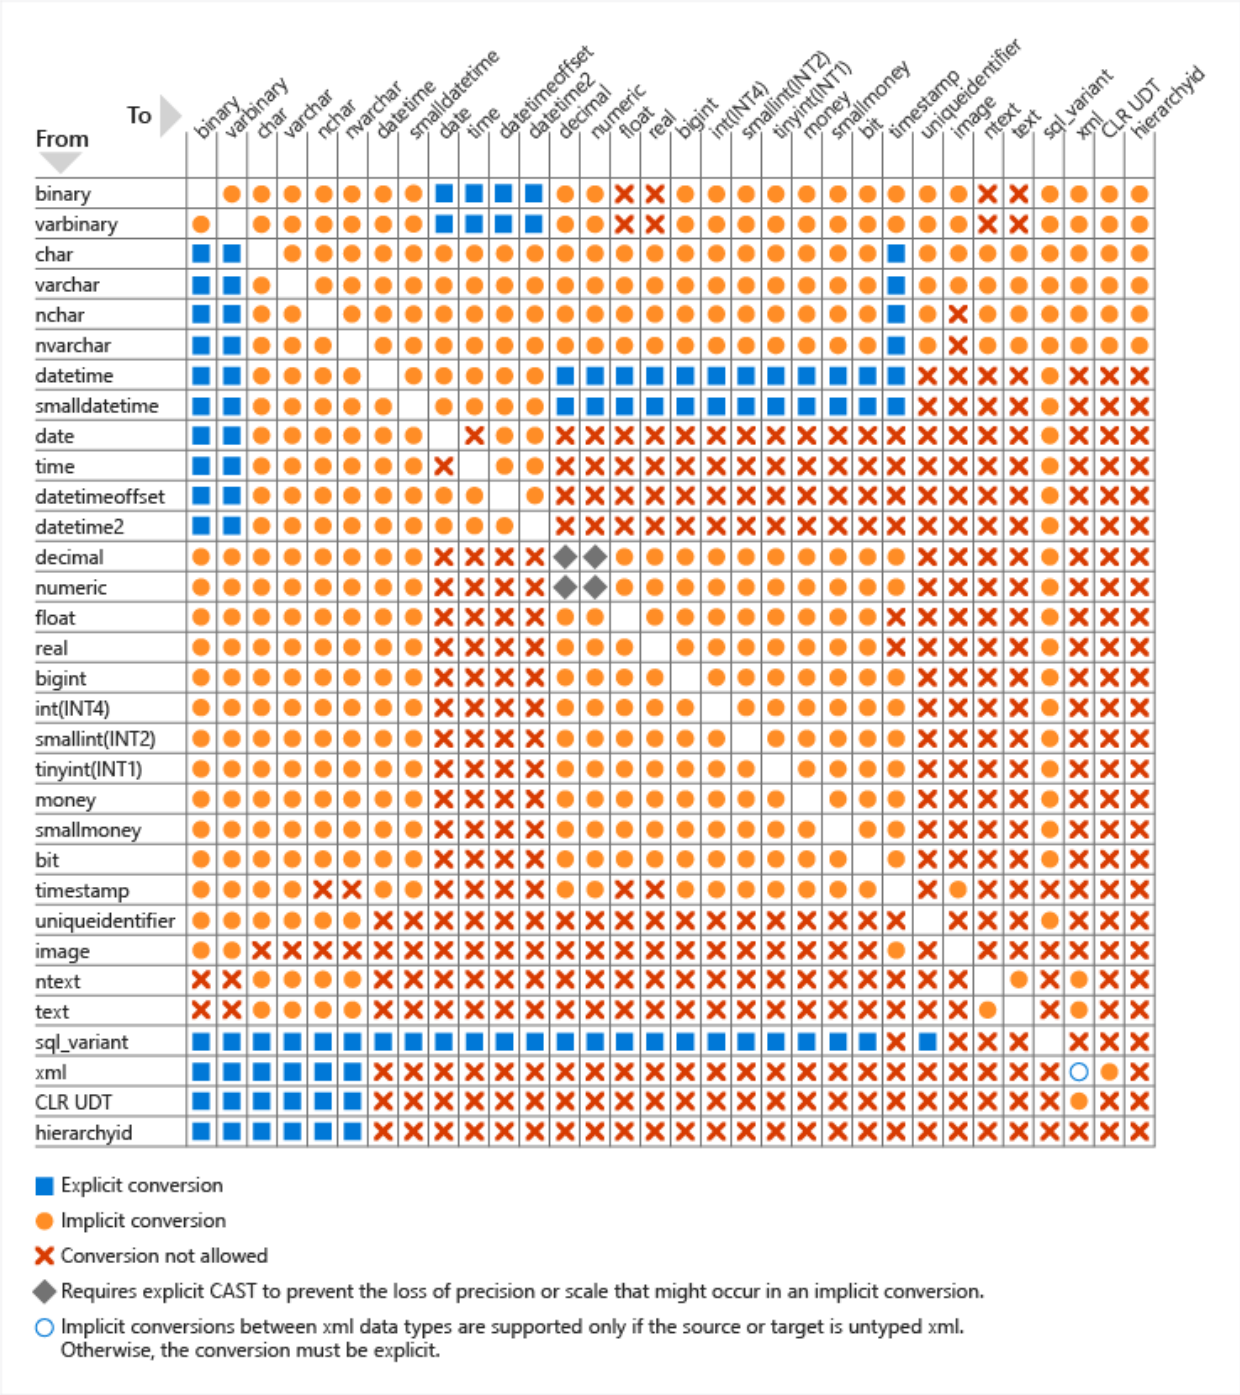

- SQL Server provides various system-supplied data types that can be used in your tables and queries.
- Also, SQL Server allows the creation of user-defined data types using either T-SQL or the .NET framework.

Design indexes

- SQL Server offers several index types to support different workloads.
- At a high level, an index can be thought of as an on-disk structure associated with a table or view, enabling SQL Server to more easily find the row or rows associated with the index key (which consists of one or more columns in the table or view), compared to scanning the entire table.

Clustered indexes

- A common DBA job interview question is to ask the candidate the difference between a clustered and nonclustered index, as indexes are fundamental data storage technologies in SQL Server.


- A clustered index is the underlying table, stored in sorted order based on the key value.
- There can only be one clustered index on a given table because the rows can be stored in only one order.
- A table without a clustered index is called a heap, and heaps are typically used only as staging tables.
- An important performance design principle is to keep your clustered index key as narrow as possible.
- When considering one or more key columns for your clustered index, you should choose columns that are unique or contain many distinct values.
- Another property of a good clustered index key is for records that are accessed sequentially and are used frequently to sort the data retrieved from the table.
- Having the clustered index on the column used for sorting can prevent the cost of sorting every time that query executes because the data will already be stored in the desired order.

Note


- When we say that the table is 'stored' in a particular order, we're referring to the logical order, not the physical, on-disk order.
- Indexes have pointers between pages, and the pointers help create the logical order.
- When scanning an index in order, SQL Server follows the pointers from page to page.
- Immediately after creating an index, it's most likely also stored in physical order on the disk, but after you start making modifications to the data and new pages need to be added to the index, the pointers will still give us the correct logical order, but the new pages will most likely not be in physical disk order.

Nonclustered indexes


- Nonclustered indexes are separate structures from the data rows.
- A nonclustered index contains the key values defined for the index and a pointer to the data row that contains the key value.
- You can add extra nonkey columns to the leaf level of the nonclustered index using the included columns feature in SQL Server, allowing you to cover more columns.
- You can create multiple nonclustered indexes on a table.
- The following example shows when you need to add an index or add columns to an existing nonclustered index.

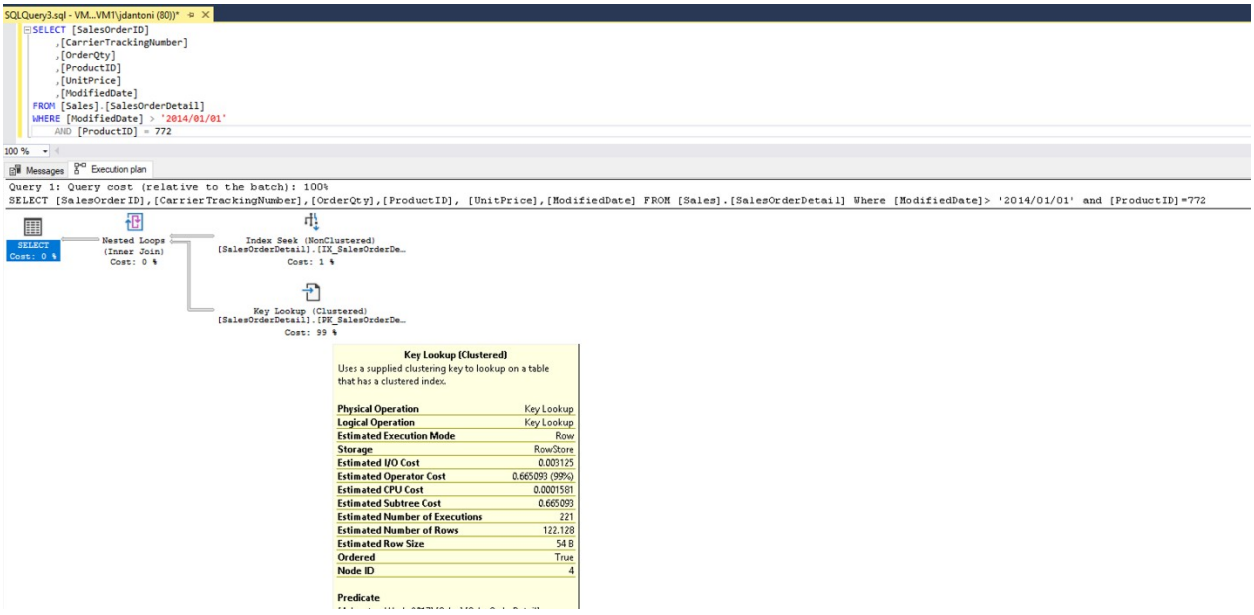

- The query plan indicates that for each row retrieved using the index seek, more data need to be retrieved from the clustered index (the table itself).
- There's a nonclustered index, but it only includes the product column.
- If you add the other columns in the query to a nonclustered index, you can see the execution plan change to eliminate the key lookup.

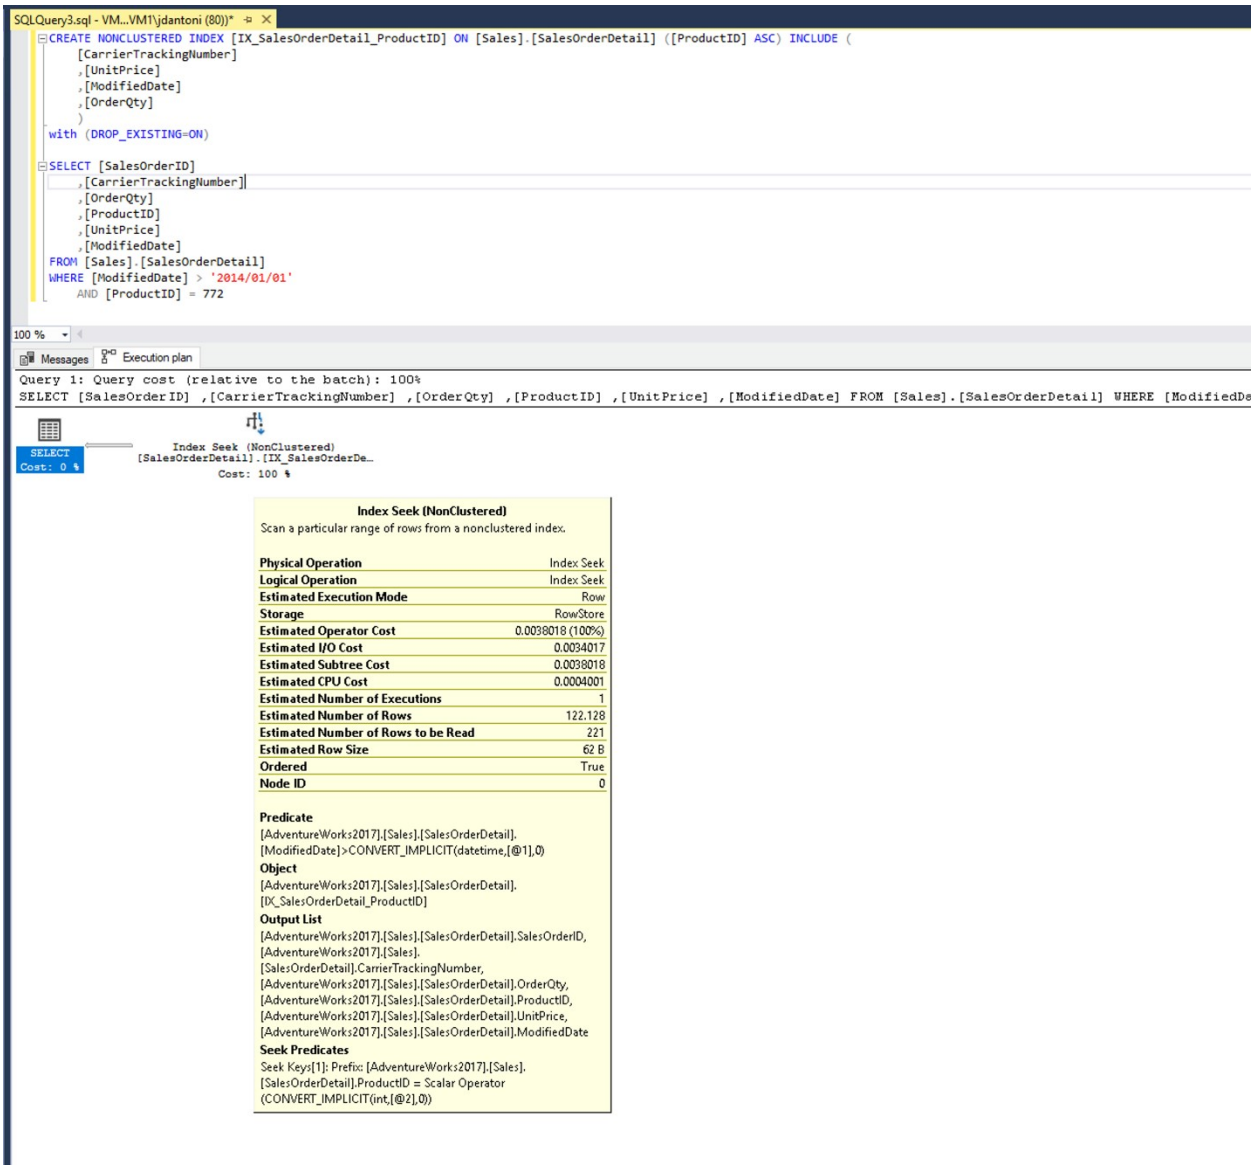

- The index created above is an example of a covering index.
- In addition to the key column, you're including extra columns to cover the query and eliminate the need to access the table itself.
- Both nonclustered and clustered indexes can be defined as unique, meaning there can be no duplication of the key values.
- Unique indexes are automatically created when you create a PRIMARY KEY or UNIQUE constraint on a table.
- This section focuses on b-tree indexes in SQL Server, also known as row store indexes.
- The following image represents the general structure of a b-tree:

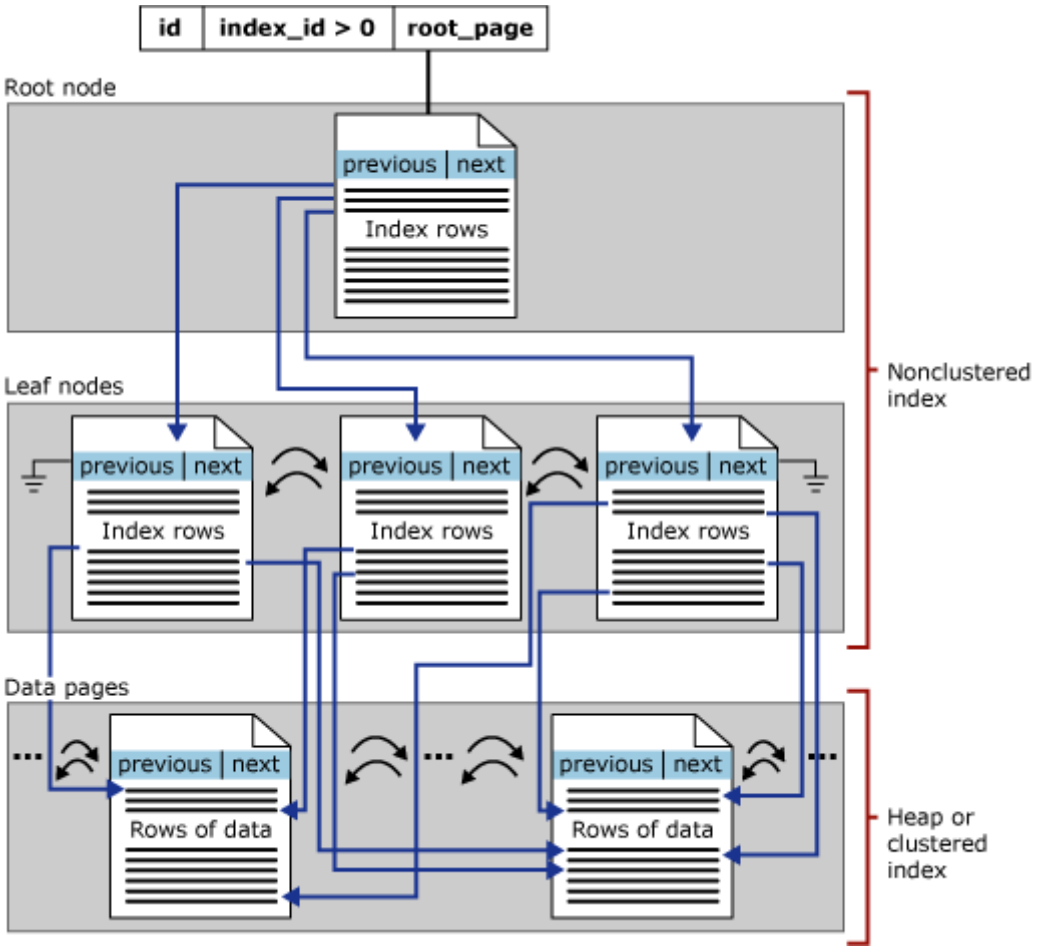

- Each page in an index b-tree is called an index node, and the top node of the b-tree is called the root node.
- The bottom nodes in an index are called leaf nodes, and the collection of leaf nodes is the leaf level.
- Index design is a blend of art and science.
- A narrow index with few columns in its key requires less time to update and has lower maintenance overhead; however, it may not be useful for as many queries as a wider index that includes more columns.
- You may need to experiment with several indexing approaches based on the columns selected by your application's queries.
- The query optimizer will generally choose what it considers to be the best existing index for a query; however, that doesn't mean there isn't a better index that could be built.
- Properly indexing a database can be a complex task.
- When planning your indexes for a table, you should keep a few basic principles in mind:
- Understand the system's workloads.
- Tables primarily used for insert operations benefit less from extra indexes compared to tables used for data warehouse operations with high read activity.
- Optimize indexes around the most frequently run queries.
- Choose appropriate data types for columns in your queries.
- Indexes work best with integer data types, unique, or non-null columns.
- Create nonclustered indexes on columns frequently used in predicates and join clauses, keeping them as narrow as possible to minimize overhead.
- Consider data size/volume.
- Table scans on small tables are relatively cheap, while scans on large tables are costly.
- Another option provided by SQL Server is the creation of filtered indexes.
- Filtered indexes are ideal for columns in large tables where a significant percentage of rows share the same value in that column.

- The following example is an employee table that stores records of all employees, including those who have left or retired.

```
SQL
CREATE TABLE [HumanResources].[Employee](
    [BusinessEntityID] [int] NOT NULL,
- [NationalIDNumber] [nvarchar](15) NOT NULL,
    [LoginID] [nvarchar](256) NOT NULL,
    [OrganizationNode] [hierarchyid] NULL,
- [OrganizationLevel] AS ([OrganizationNode].[GetLevel]()),
    [JobTitle] [nvarchar](50) NOT NULL,
    [BirthDate] [date] NOT NULL,
    [MaritalStatus] [nchar](1) NOT NULL,
    [Gender] [nchar](1) NOT NULL,
    [HireDate] [date] NOT NULL,
    [SalariedFlag] [bit] NOT NULL,
    [VacationHours] [smallint] NOT NULL,
    [SickLeaveHours] [smallint] NOT NULL,
    [CurrentFlag] [bit] NOT NULL,
- [rowguid] [uniqueidentifier] ROWGUIDCOL NOT NULL,
    [ModifiedDate] [datetime] NOT NULL)
```

- In this table, there's a column called CurrentFlag, which indicates if an employee is currently employed.
- This example uses the bit datatype, representing two values: one for currently employed and zero for not currently employed.
- Creating a filtered index with WHERE CurrentFlag = 1 on the CurrentFlag column allows for efficient queries of current employees.
- Also, you can create indexes on views, which can provide significant performance gains when views contain query elements like aggregations and/or table joins.


Columnstore indexes

- Columnstore indexes offer enhanced performance for queries involving large aggregation workloads.
- Initially targeted at data warehouses, columnstore indexes have since been adopted for various other workloads to address query performance issues on large tables.
- Like b-tree indexes, a clustered columnstore index represents the table itself stored in a special way, while nonclustered columnstore indexes are stored independently of the table.
- Clustered columnstore indexes inherently include all columns in a table but aren't sorted.
- Nonclustered columnstore indexes are typically used in two scenarios.
- The first is when a column's data type isn't supported in a columnstore index (for example, XML, CLR, sql_variant, ntext, text, and image).
- Since a clustered columnstore index always contains all columns of the table, a nonclustered index is the only option.
- The second scenario involves filtered indexes, used in hybrid transactional analytic processing (HTAP) architectures, where data is loaded into the table while reports are simultaneously run.
- Filtering the index (typically on a date field) allows for efficient insert and reporting performance.
- Columnstore indexes store each column independently, offering two benefits: reduced IO by scanning only necessary columns and greater compression due to similar data within columns.
- They perform best on analytic queries scanning large data sets, such as fact tables in data warehouses.
- You can augment a columnstore index with a b-tree nonclustered index for singleton value lookups.
- These indexes also benefit from batch execution mode, processing sets of rows (typically around 900) at a time instead of one by one.

- This approach reduces CPU instructions significantly.

```
SQL
SELECT SUM(Sales) FROM SalesAmount;
```

- Batch mode can provide performance increase over traditional row processing.
- While batch mode for rowstore doesn't have the same level of read performance as a columnstore index, analytical queries may see up to a 5x performance improvement.
- Another advantage of columnstore indexes for data warehouse workloads is the optimized load path for bulk insert operations of 102,400 rows or more.
- While 102,400 is the minimum value to load directly into the columnstore, each collection of rows, called a rowgroup, can be up to 1,048,576 rows.
- Having fewer, but fuller, rowgroups makes your SELECT queries more efficient because fewer rowgroups need to be scanned to retrieve the requested records.
- These loads occur in memory and are directly loaded into the index.
- For smaller volumes, data is written to a b-tree structure called a delta store and asynchronously loaded into the index.

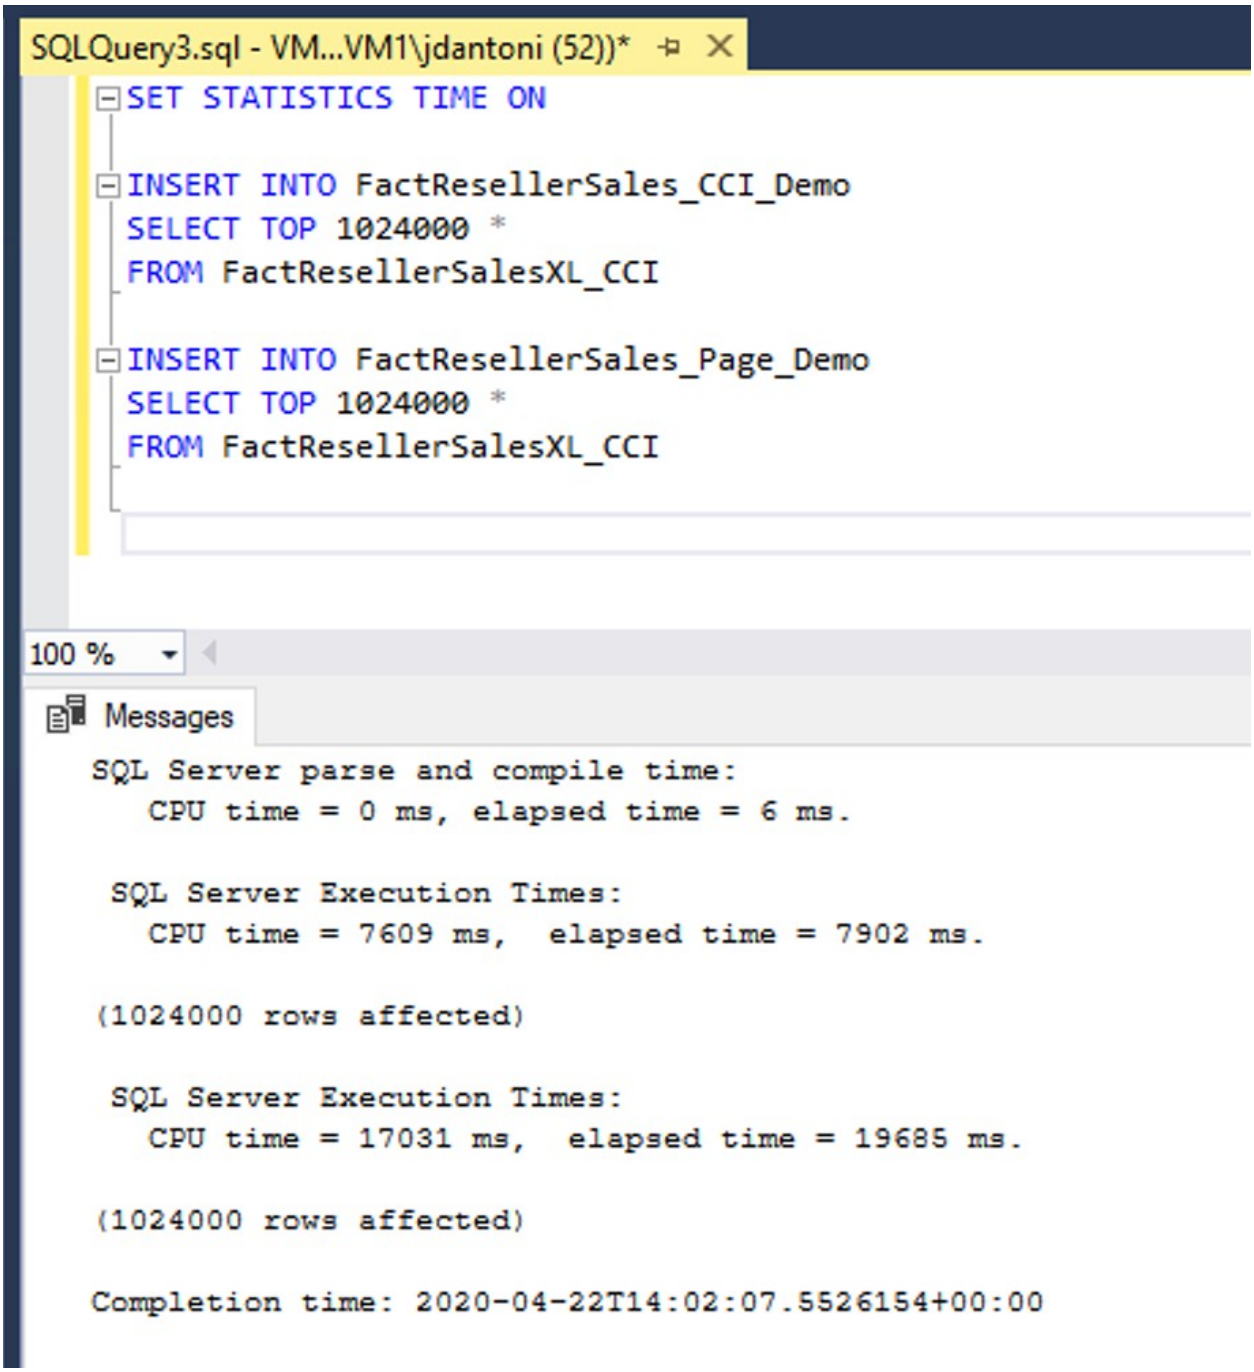

- In this example, the same data is being loaded into two tables, FactResellerSales_CCI_Demo and FactResellerSales_Page_Demo.
- The FactResellerSales_CCI_Demo has a clustered columnstore index, and the FactResellerSales_Page_Demo has a clustered b-tree index with two columns and is page compressed.
- As you can see each table is loading 1,024,000 rows from the FactResellerSalesXL_CCI table.
- When SET STATISTICS TIME is ON, SQL Server keeps track of the elapsed time of the query execution.
- Loading the data into the columnstore table took roughly 8 seconds, where loading into the page compressed table took nearly 20 seconds.
- In this example, all the rows going into the columnstore index are loaded into a single rowgroup.
- If you load less than 102,400 rows of data into a columnstore index in a single operation, it's loaded in a b-tree structure known as a delta store.
- The database engine moves this data into the columnstore index using an asynchronous process called the tuple mover.

- Having open delta stores can affect the performance of your queries, because reading those records is less efficient than reading from the columnstore.
- You can also reorganize the index with the COMPRESS_ALL_ROW_GROUPS option in order to force the delta stores to be added and compressed into the columnstore indexes.

Exercise: Identify database design issues

- In this exercise, you'll learn how to identify database design issues using SSMS.

Note

- To complete this exercise, you'll need an Azure subscription.
- Launch the exercise and follow the instructions.

Launch Exercise

Summary

- **1 minute**
- In this module, you learned about database normalization and its three main forms: first, second, and third normal forms.
- You've also explored the concept of denormalization and its application in data warehouses through models like star schema and snowflake schema.
- The module also covered SQL Server's range of data types and the impact of their selection on performance.
- You learned about implicit and explicit conversion of data types and the use of CAST or CONVERT functions to enforce data type conversion.
- Lastly, you've been introduced to SQL Server's system-supplied data types and the creation of user-defined data types using T-SQL or the .NET framework.
- The main takeaways from this module include understanding the importance of database normalization and denormalization, and how they can influence database performance.
- You learned how to optimize storage and enhance query performance by choosing appropriate data types and using explicit conversion when necessary.
- You also gained knowledge about SQL Server's index types, including clustered and nonclustered indexes, and their role in optimizing different workloads.
- Furthermore, you learned about the considerations for index design, such as understanding system workloads, optimizing indexes around frequently run queries, and choosing appropriate data types for columns.

Additional reading

Educational SQL resourcesEducational SQL resources

SQL Server Data TypesSQL Server Data Types

Index Design BasicsIndex Design Basics

Evaluate performance improvements

Intermediate

Data Analyst

Data Engineer

Database Administrator

Azure SQL Database

SQL Server

- Evaluate possible changes to indexes.
- Determine the impact of changes to queries and indexes.
- Explore Query Store hints.

Learning objectives


- After completing this module, you will be able to:
- Determine when changing indexes or defining new ones can affect performance
- Evaluate wait statistics as an aid in finding areas for performance improvement
- Understand how query hints work, and when to use them

Introduction

- One of the challenges faced by database administrators is evaluating the changes made to code or data structures on a busy production system.
- While tuning a single query in isolation provides straightforward metrics such as elapsed time or logical reads, making minor adjustments on a busy system requires a more comprehensive evaluation.
- In a production environment, numerous factors can influence the performance of a query or data structure.
- These include concurrent user activity, system resource utilization, and the overall workload.
- As a result, you must consider the broader context when assessing the effectiveness of their changes.
- This involves monitoring system performance over time, analyzing query execution plans, and understanding the interactions between different components of the database.
- Additionally, you need to be aware of potential side effects that may arise from their modifications.
- For instance, a change that improves the performance of one query might inadvertently degrade the performance of another.
- Therefore, thorough testing and validation are essential to ensure that any adjustments made don't negatively impact the overall system.
- Ultimately, the goal is to achieve a balance between optimizing individual queries and maintaining the stability and efficiency of the entire production system.
- By adopting a comprehensive approach to evaluation, you can ensure that their changes lead to meaningful improvements without compromising the overall performance of the database.

Describe wait statistics

- A comprehensive approach to monitoring server performance involves evaluating what the server is waiting on.
- Wait statistics are intricate, and SQL Server is equipped with hundreds of wait types that monitor each running thread and log what the thread is waiting for.
- To effectively detect and troubleshoot SQL Server performance issues, it's essential to understand how wait statistics work and how the database engine utilizes them while processing requests.
- This knowledge allows you to pinpoint bottlenecks and optimize performance more accurately.

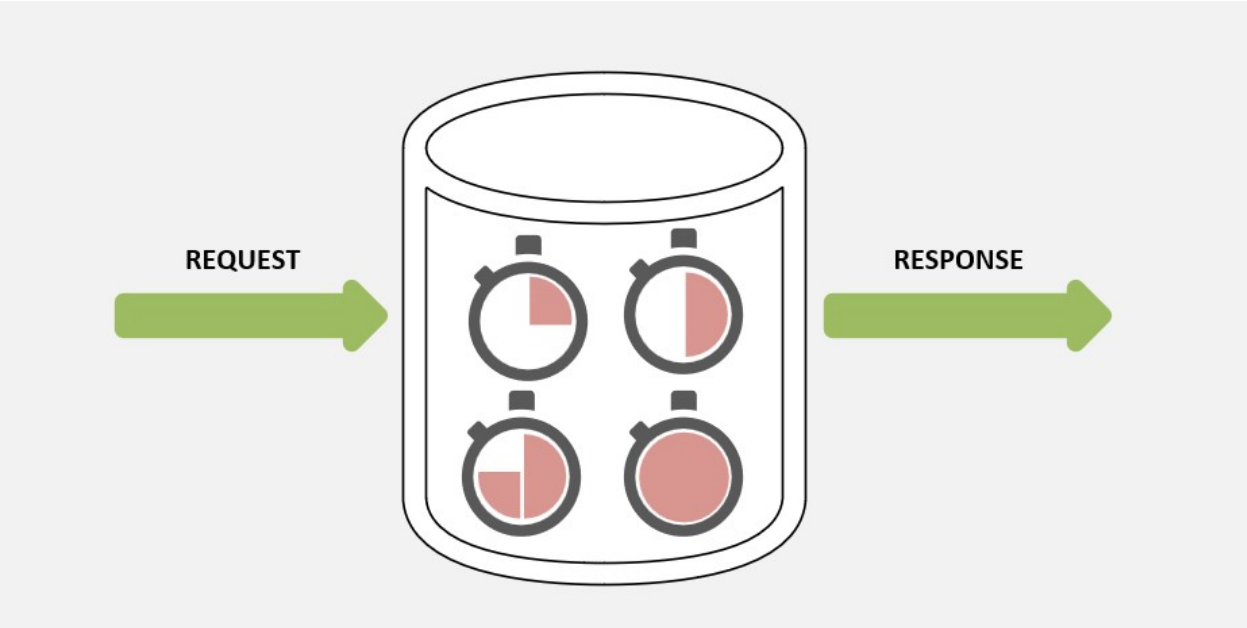

- Wait statistics are broken down into three types of waits: resource waits, queue waits, and external waits.
- Resource waits occur when a worker thread in SQL Server requests access to a resource that is currently being used by a thread.
- Examples of resources wait are locks, latches, and disk I/O waits.
- Queue waits occur when a worker thread is idle and waiting for work to be assigned.
- Example queue waits are deadlock monitoring and deleted record cleanup.
- External waits occur when SQL Server is waiting on an external process like a linked server query to complete.
- An example of an external wait is a network wait related to returning a large result set to a client application.
- You can check sys.dm_os_wait_stats system view to explore all the waits encountered by threads that executed, and sys.dm_db_wait_stats for Azure SQL Database.
- The sys.dm_exec_session_wait_stats system view lists active waiting sessions.
- These system views allow you to get an overview of the performance of the server, and to readily identify configuration or hardware issues.
- This data is persisted from the time of instance startup, but the data can be cleared as needed to identify changes.
- Wait statistics are evaluated as a percentage of the total waits on the server.

	WaitType	Wait Percentage	AvgWait_Sec
1	REDO_THREAD_PENDING_WORK	24.75	0.1016
2	CXPACKET	17.19	0.0021
3	CXCONSUMER	12.24	0.0090
4	PARALLEL_REDO_TRAN_TURN	10.60	0.0029
5	SOS_SCHEDULER_YIELD	10.06	0.0022
6	BPSORT	3.80	0.0126
7	PAGEIOLATCH_SH	3.60	0.0029
8	BACKUPIO	2.01	0.0110
9	HTDELETE	1.83	0.1573
10	LATCH_EX	1.81	0.0047

- The result of this query from sys.dm_os_wait_stats shows the wait type, and the aggregation of percent of time waiting (Wait Percentage column) and the average wait time in seconds for each wait type.
- In this case, the server has Always On Availability Groups in place, as indicated by the REDO_THREAD_PENDING_WORK and PARALLEL_REDO_TRAN_TURN wait types.
- The relatively high percentage of CXPACKET and SOS_SCHEDULER_YIELD waits indicates that this server is under some CPU pressure.
- As DMVs provide a list of wait types with the highest time accumulated since the last SQL Server startup, collecting and storing wait statistic data periodically could help you understand and correlate performance problems with other database events.
- Considering that DMVs provide you with a list of wait types with the highest time accumulated since the last SQL Server startup, collecting and storing wait statistics periodically might help you understand and correlate performance problems with other database events.
- There are several types of waits available in SQL Server, but some of them are common.
- RESOURCE_SEMAPHORE—indicates that queries are waiting for memory to become available, often due to excessive memory grants to certain queries.
- This issue typically manifests as long query runtimes or even time-outs.
- Causes of these wait types can include out-of-date statistics, missing indexes, and high query concurrency.
- LCK_M_X—frequently indicates a blocking problem.
- This issue can be resolved by changing to the READ COMMITTED SNAPSHOT isolation level, optimizing indexing to reduce transaction times, or improving transaction management within T-SQL code.
- PAGEIOLATCH_SH—this wait type can indicate issues with indexes or the absence of useful indexes, causing SQL Server to scan excessive amounts of data.
- Alternatively, if the wait count is low but the wait time is high, it may suggest storage performance problems.
- You can observe this behavior by analyzing the data in the waiting_tasks_count and wait_time_ms columns in the sys.dm_os_wait_stats system view to calculate the average wait time for a given wait type.
- SOS_SCHEDULER_YIELD—this wait type can indicate high CPU utilization, which is correlated with either high number of large scans, or missing indexes, and often with high numbers of CXPACKET waits.
- CXPACKET—A high occurrence of this wait type can indicate improper configuration.
- Before SQL Server 2019, the default setting for the max degree of parallelism (MAXDOP) was to use all available CPUs for queries.
- Additionally, the cost threshold for parallelism was set to 5, which could cause small queries to be executed in parallel, limiting throughput.
- To reduce this wait type, you can lower the MAXDOP setting and increase the cost threshold for parallelism.
- However, the CXPACKET wait type can also indicate high CPU utilization, which is typically resolved through index tuning.
- PAGELATCH_UP—This wait type on data pages 2:1:1 can indicate TempDB contention on Page Free Space (PFS) data pages.
- Each data file has one PFS page per 64 MB of data.
- This wait is typically caused by only having one TempDB file, as prior to SQL Server 2016, the default behavior was to use one data file for TempDB.
- The best practice for TempDB is to use one file per CPU core, up to eight files.
- It's also important to ensure your TempDB data files are the same size and have the same autogrowth settings to ensure they're used evenly.
- SQL Server 2016 and higher control the growth of TempDB data files to ensure they grow in a consistent, simultaneous fashion.
- In addition to the DMVs mentioned earlier, the Query Store also tracks waits associated with specific queries.
- Although the waits data tracked by the Query Store isn't as granular as the data in the DMVs, it still provides a useful overview of what a query is waiting on.

Tune and maintain indexes

- The most common (and most effective) method for tuning T-SQL queries is to evaluate and adjust your indexing strategy.
- Properly indexed databases perform fewer IOs to return query results, and with fewer IOs there's reduced pressure on both the IO and storage systems.
- Reducing IO even allows for better memory utilization.
- Keep in mind the read/write ratio of your queries.
- A heavy write workload may indicate that the cost of writing rows to extra indexes isn't of much benefit.
- An exception would be if the workload performs mainly updates that also need to do lookup operations.
- Update operations that do lookups can benefit from extra indexes or columns added to an existing index.
- Your goal should always be to get the most benefit out of the smallest number of indexes on your tables.
- A common performance tuning approach is as follows:
- Evaluate existing index usage using sys.dm_db_index_operational_stats and sys.dm_db_index_usage_stats.
- Consider eliminating unused and duplicate indexes, but this should be done carefully.
- Some indexes may only be used during monthly/quarterly/annual operations, and may be important for those processes.
- You may also consider creating indexes to support those operations just before the operations are scheduled, to reduce the overhead of having otherwise unused indexes on a table.
- Review and evaluate expensive queries from the Query Store, or Extended Events capture, and work to manually craft indexes to better serve those queries.
- Create the indexes in a nonproduction environment, and test query execution and performance and observe performance changes.
- It's important to note any hardware differences between your production and nonproduction environments, as the amount of memory and the number of CPUs could affect your execution plan.
- After testing carefully, implement the changes to your production system.
- Verify the column order of your indexes—the leading column drives column statistics and usually determines whether the optimizer chooses the index.
- Ideally, the leading column is selective and used in the WHERE clause of many of your queries.
- Consider using a change control process for tracking changes that could affect application performance.
- Before dropping an index, save the code in your source control, so the index can be quickly recreated if an infrequently run query requires the index to perform well.
- Finally, columns used for equality comparisons should precede columns used for inequality comparisons and that columns with greater selectivity should precede columns with fewer distinct values.

Resumable index

- Resumable index allows index maintenance operations to be paused, or take place in a time window, and be resumed later.
- A good example of where to use resumable index operations is to reduce the impact of index maintenance in a busy production environment.
- You can then perform rebuild operations during a specific maintenance window giving you more control over the process.
- Furthermore, creating an index for a large table can negatively affect the performance of the entire database system.
- The only way to fix this issue in versions prior to SQL Server 2019 is to kill the index creation process.
- Then you have to start the process over from the beginning if the system rolls back the session.
- With resumable index, you can pause the build and then restart it later at the point it was paused.
- The following example shows how to create a resumable index:

```
SQL
-- Creates a nonclustered index for the Customer table
```

```
CREATE INDEX IX_Customer_PersonID_ModifiedDate
  ON Sales.Customer (PersonID, StoreID, TerritoryID, AccountNumber, ModifiedDate)
WITH (RESUMABLE=ON, ONLINE=ON)
GO
```

- In a query window, pause the index operation:

```
SQL
ALTER INDEX IX_Customer_PersonID_ModifiedDate ON Sales.Customer PAUSE
GO
```

- This statement uses the PAUSE clause to temporarily stop the creation of the resumable online index.
- You can check the current execution status for a resumable online index by querying the sys.index_resumable_operations system view.

Note

- Resumable index is only supported with online operations.

Understand query hints

- Query hints are options or strategies that can be applied to enforce the query processor to use a particular operator in the execution plan for SELECT, INSERT, UPDATE, or DELETE statements.
- Query hints override any execution plan the query processor might select for a given query with the OPTION clause.
- In most cases, the query optimizer selects an efficient execution plan based on the indexes, statistics, and data distribution.
- Database administrators rarely need to intervene manually.
- You can change the execution plan of the query by adding query hints to the end of the query.
- For example, if you add OPTION (MAXDOP <integer_value>) to the end of a query that uses a single CPU, the query may use multiple CPUs (parallelism) depending on the value you choose.
- Or, you can use OPTION (RECOMPILE) to ensure that the query generates a new, temporary plan each time it's executed.

```
SQL
--With maxdop hint
SELECT ProductID, OrderQty, SUM(LineTotal) AS Total
  FROM Sales.SalesOrderDetail
  WHERE UnitPrice < $5.00
  GROUP BY ProductID, OrderQty
  ORDER BY ProductID, OrderQty
  OPTION (MAXDOP 2)
GO

--With recompile hint
SELECT City
  FROM Person.Address
  WHERE StateProvinceID=15 OPTION (RECOMPILE)
GO
```

- Although query hints may provide a localized solution to various performance-related issues, you should avoid using them in production environment for the following reasons.
- Having a permanent query hint on your query can result in structural database changes that would be beneficial to that query not being applicable.
- You can't benefit from new and improved features in subsequent versions of SQL Server if you bind a query to a specific execution plan.

- However, there are several query hints available on SQL Server, which are used for different purposes.
- Let's discuss a few of them below:
- FAST <integer_value>—retrieves the first <integer_value> number of rows while continuing query execution.
- It works better with small data sets and low value for fast query hint.
- As row count is increased, query cost becomes higher.
- OPTIMIZE FOR—provides instructions to the query optimizer that a particular value for a local variable should be used when a query is compiled and optimized.

USE PLAN—the query optimizer uses a query plan specified by the *xml_plan* attribute.

- RECOMPILE—creates a new, temporary plan for the query and discards it immediately after the query is executed.
- { LOOP | MERGE | HASH } JOIN—specifies all join operations are performed by LOOP JOIN, MERGE JOIN, or HASH JOIN in the whole query.
- The optimizer chooses the least expensive join strategy from among the options if you specify more than one join hint.
- MAXDOP <integer_value>—overrides the max degree of parallelism value of sp_configure.
- The query specifying this option also overrides the Resource Governor.
- You can also apply multiple query hints in the same query.
- The following example uses the HASH GROUP and FAST <integer_value> query hints in the same query.


SQL

```
SELECT ProductID, OrderQty, SUM(LineTotal) AS Total
FROM Sales.SalesOrderDetail
WHERE UnitPrice < $5.00
GROUP BY ProductID, OrderQty
ORDER BY ProductID, OrderQty
OPTION (HASH GROUP, FAST 10);
GO
```

- To learn more about query hints, see Hints (Transact-SQL).

Query Store hints

- Query Store hints provides a simple method for shaping query plans without modifying application code.
- Query Store hints are useful when the query optimizer doesn't generate an efficient execution plan, and when the developer or DBA can't modify the original query text.
- In some applications, the query text may be hardcoded or automatically generated.

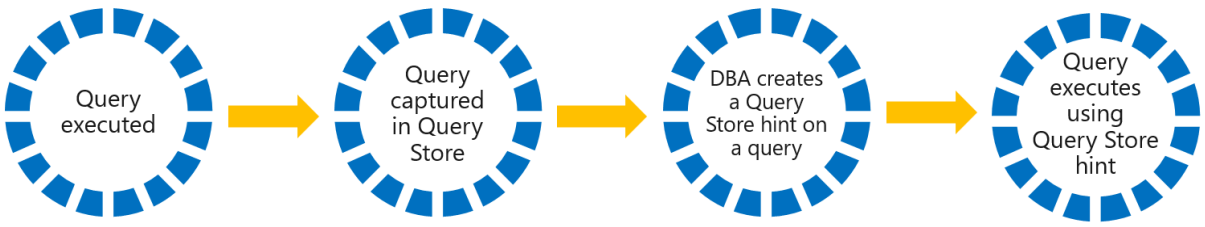

- To use Query Store hints, you need to identify the Query Store query_id of the query statement you wish to modify through Query Store catalog views, built-in Query Store reports, or Query Performance Insight for Azure SQL Database.
- Then, execute sp_query_store_set_hints with the query_id and query hint string you wish to apply to the query.
- The following example shows how to obtain the query_id for a specific query and then use it to apply the RECOMPILE and MAXDOP hints to the query.

SQL

```
SELECT q.query_id, qt.query_sql_text
```

```
FROM sys.query_store_query_text qt
INNER JOIN sys.query_store_query q
ON qt.query_text_id = q.query_text_id
WHERE query_sql_text like N'%ORDER BY CustomerName DESC%'
• AND query_sql_text not like N'%query_store%'
GO

--Assuming the query_id returned by the previous query is 42
EXEC sys.sp_query_store_set_hints @query_id= 42, @query_hints = N'OPTION(RECOMPILE, MAXDOP 1)'
GO
```

- There are a few scenarios where Query Store hints can help with query-level performance issues.
- Recompile a query on each execution.
- Limit the maximum degree of parallelism for a statistic update operation.
- Use a Hash join instead of a Nested Loops join.
- Use compatibility level 110 for a specific query while keeping the database at the current compatibility.
- For more information about Query Store hints, see Query Store hints.

Explore performance scenarios

- To decide how to use performance tools and capabilities, it's important to look at performance for Azure SQL through scenarios.

Understand common performance scenarios

- A common technique for SQL Server performance troubleshooting is to examine whether a performance problem is Running (high CPU) or Waiting (waiting on a resource).
- The following diagram shows a decision tree to determine if a SQL Server performance issue is running or waiting, and how to use performance tools to determine the cause and solution.

- First, look at overall resource usage.
- For a standard SQL Server deployment, you might use tools such as Performance Monitor in Windows or top in Linux.
- For Azure SQL, you can use the following methods:

• Azure portal/PowerShell/alerts

- Azure Monitor has integrated metrics to view resource usage for Azure SQL.
- You can also set up alerts to look for resource usage conditions.

• sys.dm_db_resource_stats

- For Azure SQL Database, you can look at this DMV to see CPU, memory, and I/O resource usage for the database deployment.
- This DMV takes a snapshot of this data every 15 seconds.

• sys.server_resource_stats

- This catalog view returns CPU, IO, and storage usage for Azure SQL Managed Instance.
- The data is aggregated in 5–10 minute windows, with one row per 15-second reporting interval.

• sys.dm_user_db_resource_governance

- For Azure SQL Database, this DMV returns the actual configuration and capacity settings used by resource governance mechanisms in the current database or elastic pool.

- **sys.dm_user_db_resource_governance**
- For Azure SQL Managed Instance, this DMV returns resource governance configuration and capacity settings for the current SQL Managed Instance.

Running

- If you have determined the problem is high CPU utilization, this is called a running scenario.
- A running scenario can involve queries that consume resources through compilation or execution.
- Use the following tools for further analysis:

- **Query Store**

- Use the Top Consuming Resource reports in SSMS, Query Store catalog views, or Query Performance Insight in the Azure portal (Azure SQL Database only) to find which queries are consuming the most CPU resources.
- **sys.dm_exec_requests**
- Use this DMV in Azure SQL to get a snapshot of the state of active queries.
- Look for queries with a state of RUNNABLE and a wait type of SOS_SCHEDULER_YIELD to see if you have enough CPU capacity.
- **sys.dm_exec_query_stats**
- This DMV can be used much like Query Store to find top resource consuming queries.
- It's only available for query plans that are cached, whereas Query Store provides a persistent historical record of performance.
- This DMV also allows you to find the query plan for a cached query.
- **sys.dm_exec_procedure_stats**
- This DMV provides information much like sys.dm_exec_query_stats, except the performance information can be viewed at the stored procedure level.
- After you determine what query or queries are consuming the most resources, you might have to examine whether you have enough CPU resources for your workload.
- You might debug query plans with tools like lightweight query profiling, SET statements, Query Store, or extended events tracing.

Waiting

- If your problem doesn't appear to be a high CPU resource usage, it might be that the performance problem involves waiting on a resource.
- Scenarios involving waiting on resources include:

- **I/O waits**
- **Lock waits**
- **Latch waits**
- **Buffer pool limits**
- **Memory grants**
- **Plan cache eviction**

- To perform analysis on waiting scenarios, you'd typically look at the following tools:
- **sys.dm_os_wait_stats**
- Use this DMV to see the top wait types for the database or instance.
- This can guide you on what action to take next, depending on the top wait types.
- **sys.dm_exec_requests**
- Use this DMV to find specific wait types for active queries to see what resource they're waiting on.
- This can be a standard blocking scenario, waiting on locks from other users.

- **sys.dm_os_waiting_tasks**
- You can use this DMV to find wait types for a particular task for a specific query that is currently executing, perhaps to see why it's taking longer than normal. sys.dm_os_waiting_tasks contains the live wait stats that sys.dm_os_wait_stats aggregates over time.

- **Query Store**
- Query Store provides reports and catalog views that show an aggregation of the top waits for query plan execution.
- It's important to know that a wait of CPU is equivalent to a running problem.

Scenarios specific to Azure SQL

- There are some performance scenarios, both running and waiting, that are specific to Azure SQL.
- These include log governance, worker limits, waits encountered for Business Critical service tiers, and waits specific to a Hyperscale deployment.

Log governance

- Azure SQL can use log rate governance to enforce resource limits on transaction log usage.
- You might need this enforcement to ensure resource limits and to meet promised SLA.
- Log governance might be seen from the following wait types:
- LOG_RATE_GOVERNOR: waits for Azure SQL Database
- POOL_LOG_RATE_GOVERNOR: waits for Elastic Pools
- INSTANCE_LOG_GOVERNOR: waits for Azure SQL Managed Instance
- HADR_THROTTLE_LOG_RATE*: waits for Business Critical and geo-replication latency

Worker limits

- SQL Server uses a worker pool of threads but has limits on the maximum number of workers.
- Applications with a large number of concurrent users might approach the worker limits enforced for Azure SQL Database and SQL Managed Instance:
- Azure SQL Database has limits based on service tier and size.
- If you exceed this limit, a new query receives an error.
- At the current time, SQL Managed Instance uses max worker threads, so workers past this limit might see THREADPOOL waits.

Business Critical HADR waits

- If you use a Business Critical service tier, you might unexpectedly see the following wait types:
- **HADR_SYNC_COMMIT**
- **HADR_DATABASE_FLOW_CONTROL**
- **HADR_THROTTLE_LOG_RATE_SEND_RECV**
- Even though these waits might not slow down your application, you might not be expecting to see these.
- They're normally specific to using an Always On availability group.
- Business Critical tiers use availability group technology to implement SLA and availability features of a Business Critical service tier, so these wait types are expected.
- Long wait times might indicate a bottleneck such as I/O latency or replica behind.

Hyperscale

- The Hyperscale architecture can result in some unique wait types that are prefixed with RBIO (a possible indication of log governance).
- In addition, DMVs, catalog views, and extended events are enhanced to show metrics for page server reads.
- In the next exercise, you'll learn how to monitor and solve a performance problem for Azure SQL by using the tools and knowledge you've gained in this unit.

Exercise: Isolate problem areas in poorly performing queries

- We're sorry.
- The lab environment needed to complete the exercises in this unit is temporarily unavailable.
- In this exercise, you'll learn how to isolate problem areas in poorly performing queries in a SQL Database using SSMS.

Note

- To complete this exercise, you'll need an Azure subscription.
- Launch the exercise and follow the instructions.

Launch Exercise

Summary

- **1 minute**
- In this module, you learned about monitoring server performance using SQL Server's wait statistics, which include resource waits, queue waits, and external waits.
- You have also learned how to use system views like sys.dm_os_wait_stats and sys.dm_db_wait_stats to get an overview of server performance and identify potential issues.
- The module also covered the use of Dynamic Management Views (DMVs) to understand and correlate performance problems with other database events.
- Additionally, you learned about common wait types and how the Query Store tracks waits associated with specific queries.
- The main takeaways from this module include understanding how to tune T-SQL queries by evaluating and adjusting your indexing strategy.
- You learned that proper indexing can reduce IOs, improve memory utilization, and ease pressure on IO and storage systems.
- The module also discussed the importance of column order in indexes and the use of resumable index for large tables.
- Furthermore, you learned about query hints and their potential impact on database structure and performance.
- Lastly, the module covered how to optimize Azure SQL performance by identifying whether a performance issue is due to high CPU usage or waiting on a resource, and using appropriate tools and methods to diagnose and resolve these issues.

Additional Reading

Optimizing Azure SQL PerformanceOptimizing Azure SQL Performance

- Best practices for managing the Query Store

Clustered and nonclustered indexesClustered and nonclustered indexes