W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Clone from GitHub

SHARE

‹ Previous
Next ›

Clone a Fork from GitHub


Now we have our own `fork`, but only on GitHub. We also want a `clone` on our local Git to keep working on it.

A `clone` is a full copy of a repository, including all logging and versions of files.

Move back to the **original** repository, and click the green "Code" button to get the `URL` to `clone`:

Change Platform:
GitHub
Bitbucket
GitLab

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

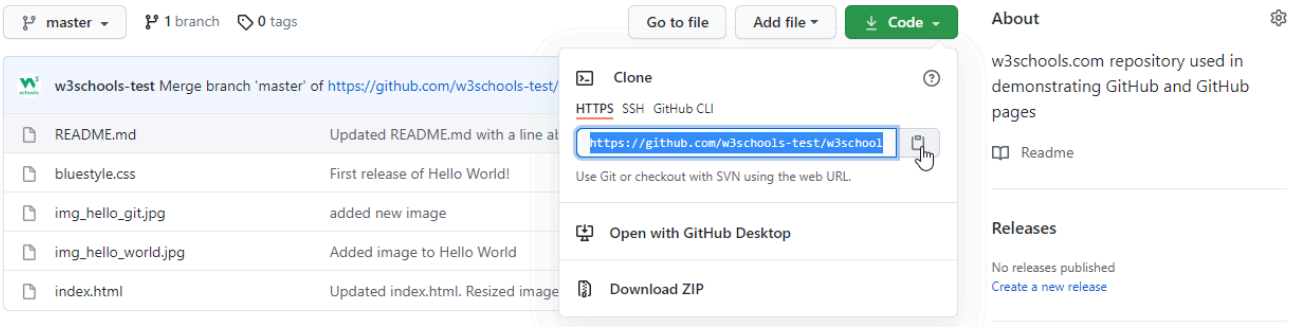

Open your Git bash and `clone` the repository:

Example

```
[user@localhost] $ git clone https://github.com/w3schools-test/w3schools-t
Cloning into 'w3schools-test.github.io'...
remote: Enumerating objects: 33, done.
remote: Counting objects: 100% (33/33), done.
remote: Compressing objects: 100% (15/15), done.
remote: Total 33 (delta 18), reused 33 (delta 18), pack
Receiving objects: 100% (33/33), 94.79 KiB | 3.16 MiB/s
Resolving deltas: 100% (18/18), done.
```

Take a look in your file system, and you will see a new directory named after the cloned project:

Example

```
[user@localhost] $ ls
w3schools-test.github.io/
```

Note: To specify a specific folder to clone to, add the name of the folder after the repository `URL`, like this: `git clone https://github.com/w3schools-test/w3schools-test.github.io.git myfolder`

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Example

```
[user@localhost] $ cd w3schools-test.github.io
[user@localhost] $ git status
On branch master
Your branch is up to date with 'origin/master'.

nothing to commit, working tree clean
```

And check the `log` to confirm that we have the full repository data:

Example

```
[user@localhost] $ git log
commit facaeae8fd87dcb63629f108f401aa9c3614d4e6 (HEAD -
Merge: e7de78f 5a04b6f
Author: w3schools-test
Date:   Fri Mar 26 15:44:10 2021 +0100

    Merge branch 'master' of https://github.com/w3schoc

commit e7de78fdefdda51f6f961829fcbdf197e9b926b6
Author: w3schools-test
Date:   Fri Mar 26 15:37:22 2021 +0100

    Updated index.html. Resized image

.....
```

Now we have a full copy of the original repository.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

changes to.

Let's see how the `remotes` of this Git is set up:

Example

```
[user@localhost] $ git remote -v
origin  https://github.com/w3schools-test/w3schools-tes
origin  https://github.com/w3schools-test/w3schools-tes
```

We see that `origin` is set up to the original "`w3schools-test`" repository, we also want to add our own `fork`.


First, we `rename` the original `origin` `remote`:

Example

```
[user@localhost] $ git remote rename origin upstream
[user@localhost] $ git remote -v
upstream        https://github.com/w3schools-test/w3sch
upstream        https://github.com/w3schools-test/w3sch
```

Then fetch the `URL` of our own `fork`:

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

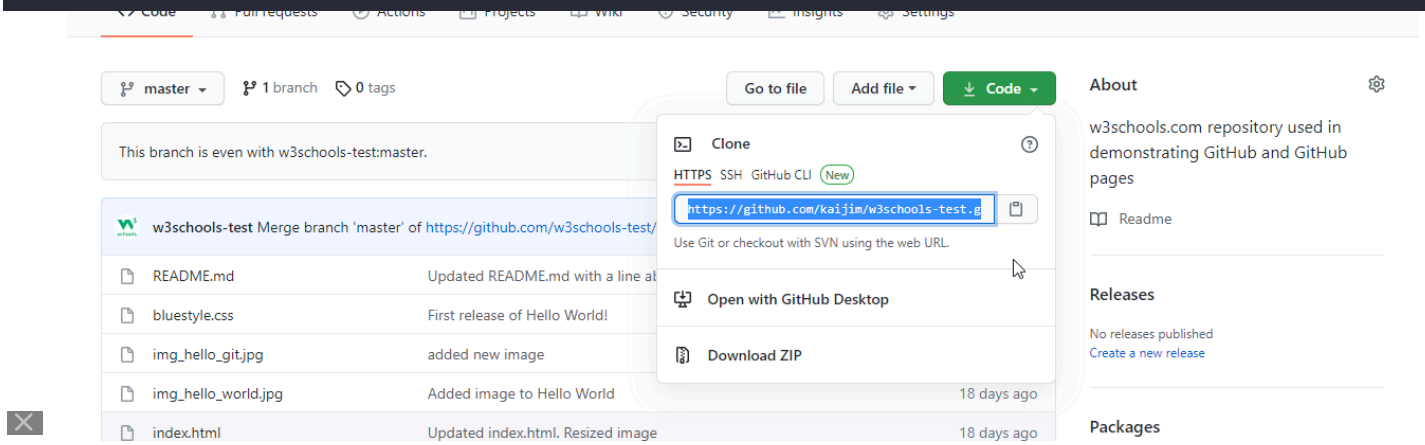

And add that as `origin`:

Example

```
[user@localhost] $ git remote add origin https://github.com/kaijim/w3schoc
[user@localhost] $ git remote -v
origin  https://github.com/kaijim/w3schools-test.github
origin  https://github.com/kaijim/w3schools-test.github
upstream        https://github.com/w3schools-test/w3sch
upstream        https://github.com/w3schools-test/w3sch
```

Note: According to Git naming conventions, it is recommended to name your own repository `origin`, and the one you forked for `upstream`

Now we have 2 remotes:

- `origin` - our own `fork`, where we have read and write access
- `upstream` - the original, where we have read-only access

Now we are going to make some changes to the code. In the next chapter, we will cover how we suggest those changes to the original repository.

REMOVE ADS

Exercise

Drag and drop the correct command to clone a repository to your computer.

```
git [          ] https://example.com/repo.git
```

get clone init fork

Submit Answer »

schools

Get Certified in Git

Boost your career with an official certification

$95

Get certified

REMOVE ADS

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

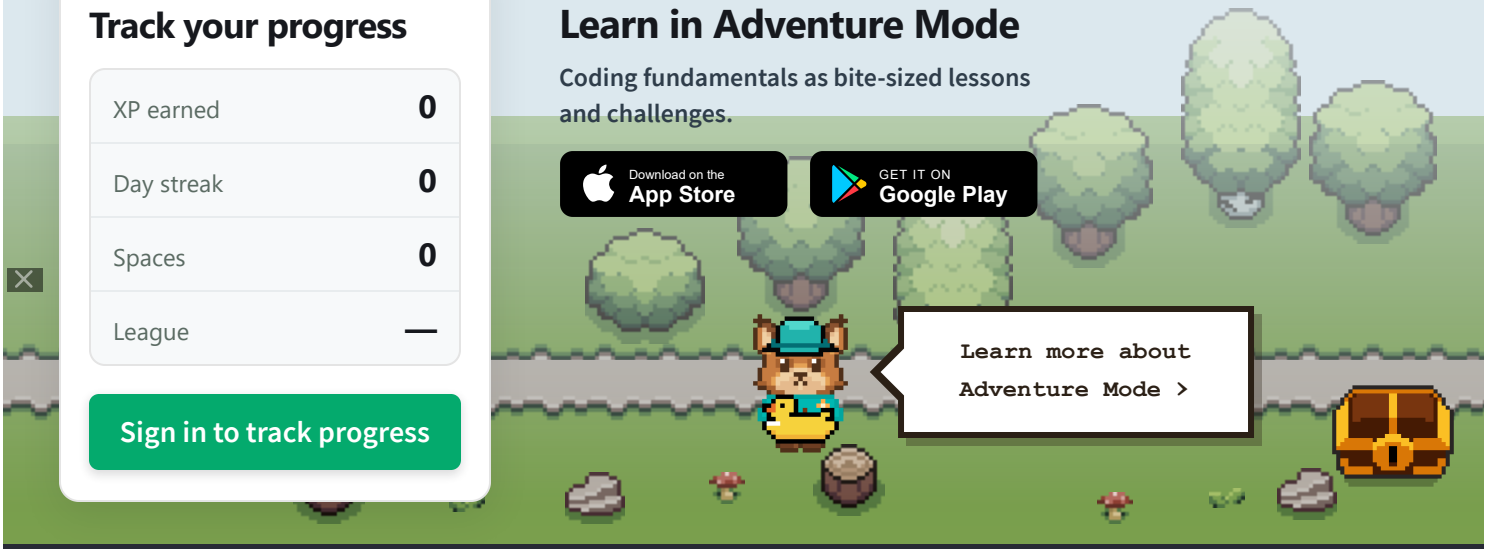

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.