W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Config

‹ Previous
Next ›

Configure Git

SHARE

Now let Git know who you are.

This is important for version control systems, as each Git commit uses this information:

Tip for Beginners: Configuring Git is safe.

You can change these settings at any time, they only affect how your name and email appear in your commits.

User Name

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Example

```
[user@localhost] $ git config --global user.name "Your Name"
```

Note: If you make a typo or mistake, just run the command again with the correct value.

The new setting will overwrite the old one.

Email Address

Your email is also attached to your commits. Set it with:

Example

```
[user@localhost] $ git config --global user.email "you@example.com"
```

Change the user name and email to your own.

You will probably also want to use this when registering to GitHub later on.

Note: If you forget to set your name or email, Git will prompt you the first time you try to commit.

You can always change these settings later, and previous commits will keep the old info.

Use `--global` to set the value for **every repository** on your computer.

Use `--local` (the default) to set it only for the current repository.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

If you do not set these, Git will prompt you the first time you try to commit.

Now you have added the minimum of configuration needed to start using Git.

So feel free to continue with the next chapter.

For more information about configuration, or if you want to change anything, keep reading this page.

REMOVE ADS

Viewing Your Configuration

You can see all your Git settings with:

Example: List All Settings

```
[user@localhost] $ git config --list
user.name=Your Name
user.email=you@example.com
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

To

Example: View a Specific Setting

```
[user@localhost] $ git config user.name
Your Name
```

Changing or Unsetting Config Values

To change a value, just run the `git config` command again with the new value.

To remove a setting, use `--unset`:

Example: Unset an Alias

```
[user@localhost] $ git config --global --unset code.editor
```

Default Branch Name

Set the default branch name for new repositories (for example, `main` instead of `master`):

Example: Set Default Branch Name

```
[user@localhost] $ git config --global init.defaultBranch main
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

- **System** (all users): `git config --system`
- **Global** (current user): `git config --global`
- **Local** (current repo): `git config --local`

The order of precedence is:

- Local (current repo)
- Global (current user)
- System (all users)

The reason to use the different levels is that you can set different values for different users or repositories.

This can be used for example to set different default branches for different repositories and users.

Example: Set a Local Config

Local settings only apply to the current repository.

```
[user@localhost] $ git config user.name "Project Name"
```

Example: Set a Global Config

Global settings apply to all repositories for the current user.

```
[user@localhost] $ git config --global user.name "Global Name"
```

Example: Set a System Config

System settings apply to all repositories for all users.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Exercise ?

Drag and drop the correct code to set your Git user name globally.


```
git config --          user.name "Your Name"
```

global local system

Submit Answer »

‹ Previous Sign in to track progress Next ›

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

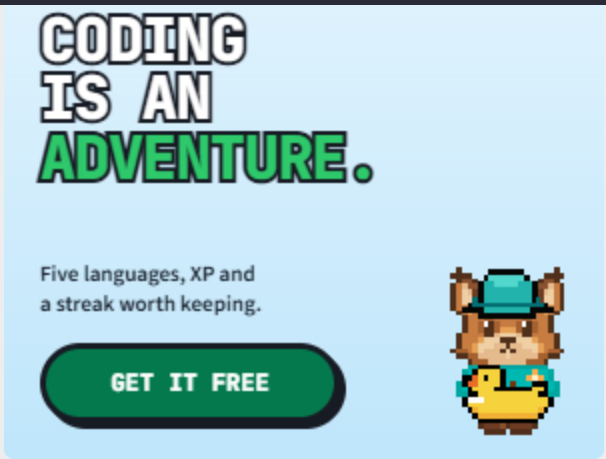


REMOVE ADS

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play

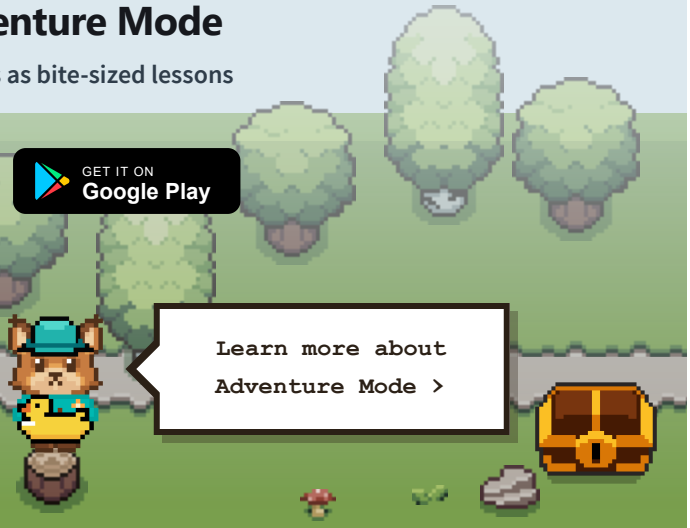

PLUS SPACES
GET CERTIFIED FOR TEACHERS
PRACTICE CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.