Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Reset

‹ Previous Next ›

What Does Git Reset Do?

SHARE

The `git reset` command moves your current branch (HEAD) to a different commit.

Depending on the option, it can also change which changes are staged or even delete changes from your working directory.

Use it to undo commits, unstage files, or clean up your history.

Change Platform:
GitHub
Bitbucket
GitLab

Summary of Git Reset Commands and Options


- `git reset --soft <commit>` - Move HEAD to commit, keep changes staged
- `git reset --mixed <commit>` - Move HEAD to commit, unstage changes (default)
- `git reset --hard <commit>` - Move HEAD to commit, discard all changes

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

How to Find the Commit to Reset To

First, you need to find the commit you want to go back to.

Use `git log --oneline` to see a summary of your commit history:

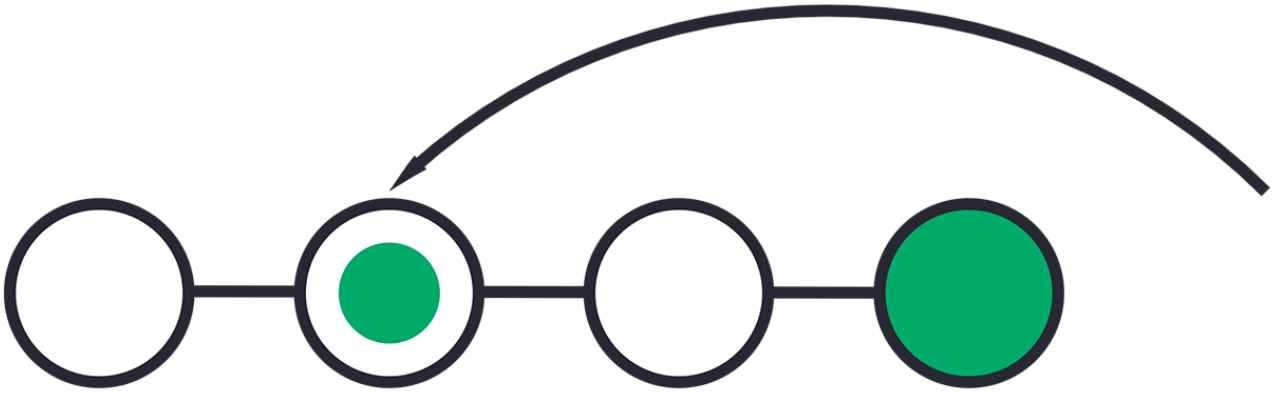

Step 2: Move the repository back to that step:



After the previous chapter, we have a part in our `commit` history we could go back to.

Let's try and do that with `reset`.

Git Reset Find Commit in Log

First thing, we need to find the point we want to return to.

To do that, we need to go through the `log`.

To avoid the very long `log` list, we are going to use the `--oneline` option, which gives just one line per `commit` showing:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

So let's find the point we want to `reset` to:

Example

```
[user@localhost] $ git log --oneline
e56ba1f (HEAD -> master) Revert "Just a regular update,
52418f7 Just a regular update, definitely no accidents
9a9add8 (origin/master) Added .gitignore
81912ba Corrected spelling error
3fdaa5b Merge pull request #1 from w3schools-test/updat
836e5bf (origin/update-readme, update-readme) Updated r
daf4f7c (origin/html-skeleton, html-skeleton) Updated i
facaeae (gh-page/master) Merge branch 'master' of https
e7de78f Updated index.html. Resized image
5a04b6f Updated README.md with a line about focus
d29d69f Updated README.md with a line about GitHub
e0b6038 merged with hello-world-images after fixing cor
1f1584e added new image
dfa79db updated index.html with emergency fix
0312c55 Added image to Hello World
09f4acd Updated index.html with a new line
221ec6e First release of Hello World!
```

We want to return to the `commit`: `9a9add8 (origin/master) Added .gitignore`, the last one before we started to mess with things.

REMOVE ADS

Git Reset --soft

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

but keep your work ready to commit.

Example

```
[user@localhost] $ git reset --soft 9a9add8
```

All changes after `9a9add8` are now staged, ready for a new commit.

Git Reset --mixed (default)

`git reset --mixed <commit>` (or just `git reset <commit>`) moves HEAD to the specified commit and unstages any changes, but keeps them in your working directory.

This is the default option and is useful if you want to "undo" a commit but keep your changes for editing or recommitting.

Example

```
[user@localhost] $ git reset --mixed 9a9add8
```

All changes after `9a9add8` are now unstaged, but still in your files.

Review Changes

After running Git Reset, review your changes to make sure everything is as expected.

Tips & Best Practices

Use Git Reset with caution, as it can rewrite your commit history.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Troubleshooting

If you encounter issues with Git Reset, try using `git status` to see the current state of your repository.

Warnings

Be careful when using Git Reset, as it can delete changes and rewrite your commit history.

Make sure to use it only when necessary.

Exercise

Drag and drop the correct option to reset to the commit with hash abc1234 and keep changes staged.

```
git reset ____ abc1234
```


--hard --soft --mixed --abort

Submit Answer »

‹ Previous Sign in to track progress Next ›

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE


schools
CODING IS AN ADVENTURE
Five languages, XP, streaks and a lynx.
GET IT FREE



REMOVE ADS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play

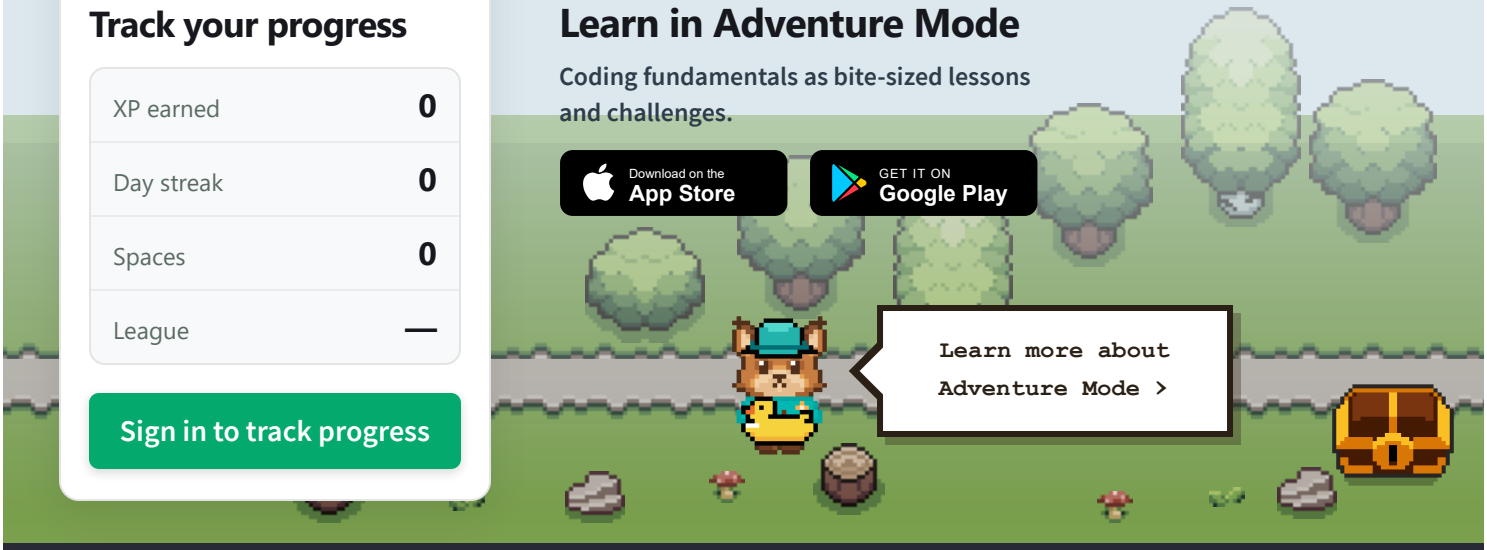

PLUS SPACES

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.