Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Revert

‹ Previous
Next ›

What Does Git Revert Do?

SHARE

The `git revert` command undoes a previous commit by creating a new commit that reverses the changes.

This keeps your commit history intact and is the safest way to undo changes in a shared repository.

Change Platform:
GitHub
Bitbucket
GitLab

Summary of Git Revert Commands and Options

- `git revert HEAD` - Revert the latest commit
- `git revert <commit>` - Revert a specific commit
- `git revert HEAD~2` - Revert a commit further back in history
- `git revert --no-edit` - Skip commit message editor

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

How to Find the Commit to Revert

First, you need to find the commit you want to undo.

Use `git log --oneline` to see a summary of your commit history:

Example

```
[user@localhost] $ git log --oneline
52418f7 (HEAD -> master) Just a regular update, definit
9a9add8 (origin/master) Added .gitignore
81912ba Corrected spelling error
3fdaa5b Merge pull request #1 from w3schools-test/updat
836e5bf (origin/update-readme, update-readme) Updated r
daf4f7c (origin/html-skeleton, html-skeleton) Updated i
facaeae (gh-page/master) Merge branch 'master' of https
e7de78f Updated index.html. Resized image
5a04b6f Updated README.md with a line about focus
d29d69f Updated README.md with a line about GitHub
e0b6038 merged with hello-world-images after fixing cor
1f1584e added new image
dfa79db updated index.html with emergency fix
0312c55 Added image to Hello World
09f4acd Updated index.html with a new line
221ec6e First release of Hello World!
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

REMOVE ADS

Run Git Revert

Once you've found the commit you want to undo, use `git revert` to create a new commit that reverses the changes:

Example

```
[user@localhost] $ git revert HEAD --no-edit
[master e56ba1f] Revert "Just a regular update, definit
 Date: Thu Apr 22 10:50:13 2021 +0200
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 img_hello_git.jpg
```

Review Changes After Git Revert

After running `git revert`, review the changes to make sure everything is as expected:

Example

```
[user@localhost] $ git log --oneline
e56ba1f (HEAD -> master) Revert "Just a regular update,
52418f7 Just a regular update, definitely no accidents
9a9add8 (origin/master) Added .gitignore
81912ba Corrected spelling error
3fdaa5b Merge pull request #1 from w3schools-test/updat
836e5bf (origin/update-readme, update-readme) Updated r
daf4f7c (origin/html-skeleton, html-skeleton) Updated i
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

```
e0b6038 merged with hello-world-images after fixing cor
1f1584e added new image
dfa79db updated index.html with emergency fix
0312c55 Added image to Hello World
09f4acd Updated index.html with a new line
221ec6e First release of Hello World!
```

Tips & Best Practices

Here are some tips and best practices to keep in mind when using Git Revert:

`git revert` `git reset`
still keep the commit history intact.

- Use `git log --oneline` to find the commit you want to undo.
- Use `git revert HEAD --no-edit` to create a new commit that reverses the changes.

Troubleshooting

Here are some common issues you may encounter when using Git Revert:

- If you get an error message saying "error: could not revert...", try using `git revert --abort` to abort the revert process.
- If you get an error message saying "error: could not apply...", try using `git revert --continue` to continue the revert process.

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE



REMOVE ADS

schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store GET IT ON Google Play

Learn more about Adventure Mode >

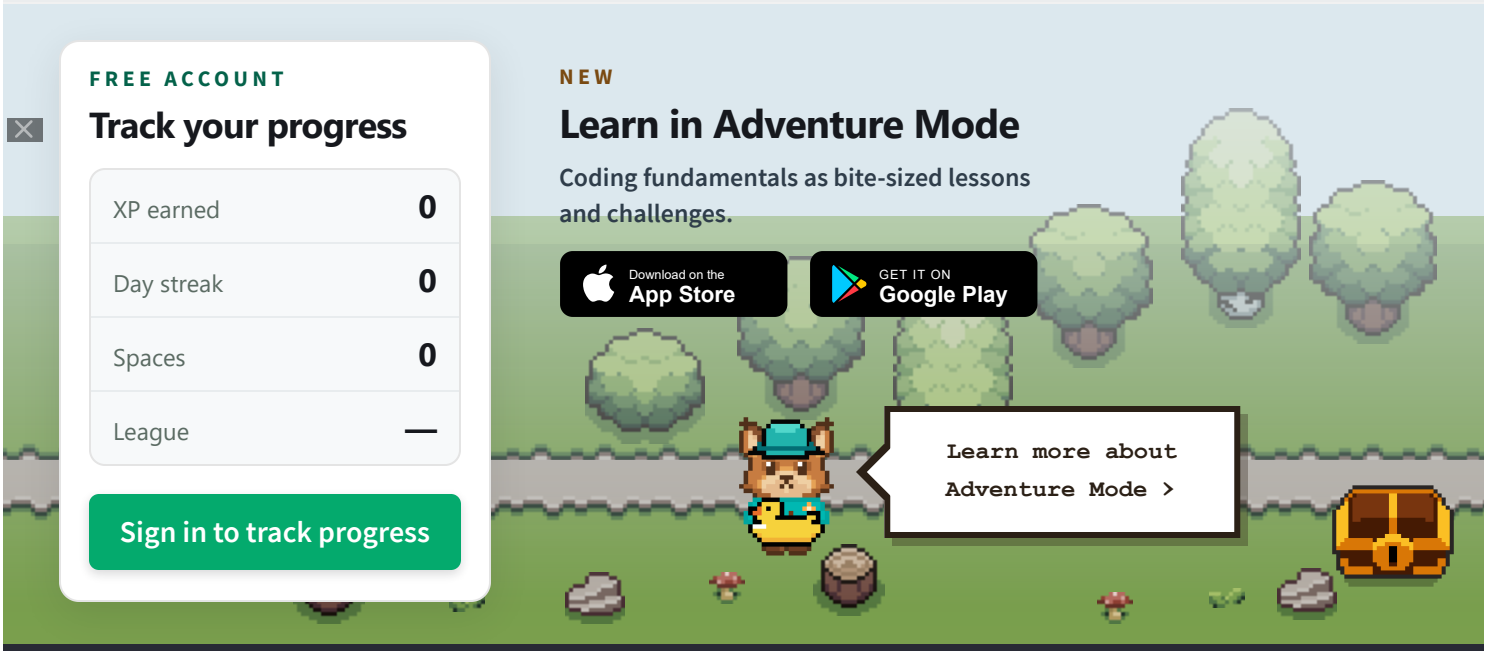

schools

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

