Tutorials Exercises
W3Schools app NEW iOS & Android
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Signing

‹ Previous Next ›

What is Commit Signing?

SHARE

Signing a commit is like putting your personal signature on your work.

It proves that you really made the change, and helps others trust your code.

On platforms like GitHub or GitLab, signed commits often get a **Verified** badge.

What is GPG?

GPG (GNU Privacy Guard) is a tool that lets you create a digital key, kind of like a secret password, to sign things.

Git uses GPG keys to sign commits and tags.

This helps prove your identity and ensures your code hasn't been tampered with.

Tutorials Exercises
W3Schools app NEW iOS & Android
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

- To help others trust your code (especially in open source projects)
- Some companies or projects require signed commits for security
- If you don't sign, your commits are still valid, just not verified

How to Set Up Commit Signing

Create a GPG key (if you don't have one):

Example: Generate a New GPG Key

```
[user@localhost] $ gpg --full-generate-key
```

Follow the prompts to create your key.

Find your key ID:

Example: List GPG Keys

```
[user@localhost] $ gpg --list-secret-keys --keyid-format=long
```

Look for a line like `sec rsa4096/1234ABCD5678EFGH`. The part after the slash is your key ID.

Tell Git to use your key:

Example: Set Signing Key

```
[user@localhost] $ git config --global user.signingkey <your-key-id>
```

Tutorials Exercises
W3Schools app NEW iOS & Android
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

```
[user@localhost] $ git commit -S -m "message"
```

To sign a tag, use:

```
[user@localhost] $ git tag -s v1.0 -m "version 1.0"
```

Sign All Commits Automatically

If you want Git to sign every commit by default, run:

```
[user@localhost] $ git config --global commit.gpgSign true
```

How to Check if a Commit is Signed

To check in Git, run:

```
[user@localhost] $ git log --show-signature
```

On GitHub or GitLab, look for a **Verified** badge next to your commit or tag.

Example: Signed Commit in Git Log

```
commit 1234abcd5678efgh
gpg: Signature made ...
gpg: Good signature from "Your Name "
Author: Your Name
Date:   ...
```

Troubleshooting Signed Commits

installation.


Note: Signed commits and tags help ensure your code hasn't been tampered with and confirm your identity as the author.

Some platforms may require additional setup to recognize your signature (for example, uploading your public key to GitHub or GitLab).

❮ Previous

Next ❯

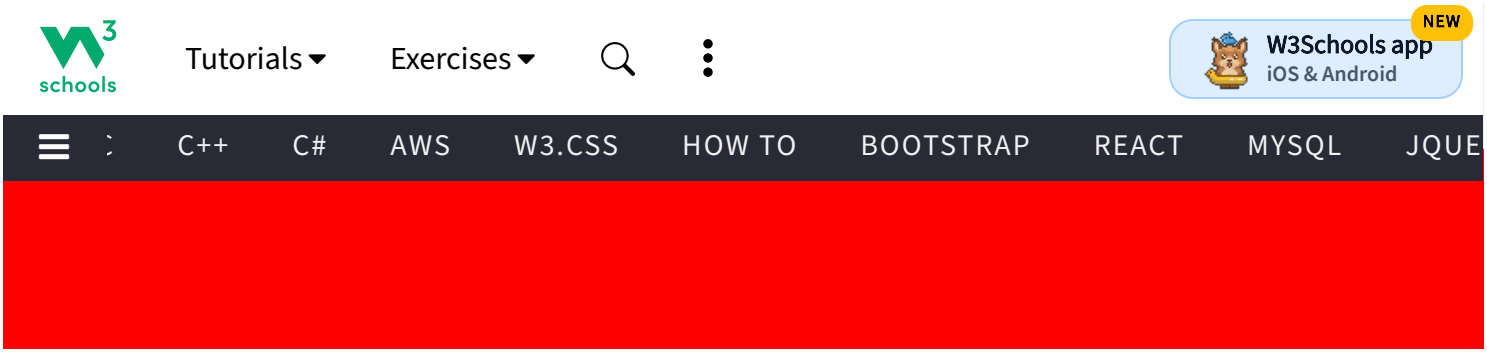


schools
Tutorials
Exercises
W3Schools app
iOS & Android
NEW
C++
C#
AWS
W3.CSS
HOW TO
BOOTSTRAP
REACT
MYSQL