Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Stash

‹ Previous Next ›

Key Commands for Stashing

SHARE

- `git stash` - Stash your changes
- `git stash push -m "message"` - Stash with a message
- `git stash list` - List all stashes
- `git stash branch <branchname>` - Create a branch from a stash

What is Git Stash? Why Use It?

Sometimes you need to quickly switch tasks or fix a bug, but you're not ready to commit your work.

`git stash` lets you save your uncommitted changes and return to a clean working directory.

You can come back and restore your changes later.

Here are some common use cases:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Stash Your Changes (`git stash`)

Save your current changes (both staged and unstaged tracked files) with:

What gets stashed?

- **Tracked files** (both staged and unstaged) are stashed by default.
- **Untracked files** (new files not yet added to Git) are not stashed by default.
- To stash untracked files too, use `git stash -u` (or `--include-untracked`).

Example: Stash Your Work

```
[user@localhost] $ git stash
Saved working directory and index state WIP on main: 12
```

This command saves your changes and cleans your working directory so you can safely switch tasks or branches.

Your changes are now saved in a stack.

What is a stash stack?

Each time you run `git stash`, your changes are saved on top of a "stack".

The most recent stash is on top, and you can apply or drop stashes from the top down, or pick a specific one from the list.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Stash with a Message (`git stash push -m`)

Add a message to remember what you stashed:

Example: Stash with a Message

```
[user@localhost] $ git stash push -m "WIP: homepage redesign"
Saved working directory and index state On main: WIP: h
```

This command lets you add a descriptive message to your stash so you can remember what you were working on.

REMOVE ADS

List All Stashes (`git stash list`)

See all your saved stashes:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

```
stash@{0}: On main: WIP: homepage redesign
stash@{1}: WIP on main: 1234567 Add new feature
```

This command shows all the stashes you have saved so far, with their names and messages.

Show Stash Details (`git stash show`)

See what was changed in the latest stash:

Example: Show Latest Stash

```
[user@localhost] $ git stash show
 src/index.html | 2 +-
 1 file changed, 1 insertion(+), 1 deletion(-)
```

This command gives a summary of what files and changes are in your most recent stash.

To see a full diff:

Example: Show Full Diff

```
[user@localhost] $ git stash show -p
diff --git a/src/index.html b/src/index.html
index 1234567..89abcde 100644
--- a/src/index.html
+++ b/src/index.html
@@ ...
```

This command shows the exact lines that were changed in your most recent stash.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Example: Apply Latest Stash

```
[user@localhost] $ git stash apply
On branch main
Changes not staged for commit:
  (use "git add ..." to update what will be committed)
  (use "git restore ..." to discard changes in working
    modified:   src/index.html
```

This command restores your most recent stashed changes, but keeps the stash in the list so you can use it again if needed.

Apply a Specific Stash (`git stash apply stash@{n}`)

Restore a specific stash from the list:

Example: Apply a Specific Stash

```
[user@localhost] $ git stash apply stash@{1}
On branch main
Changes not staged for commit:
    modified:   src/index.html
```

This command lets you restore a specific stash from your list, not just the most recent one.

Pop the Stash (`git stash pop`)

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Example: Pop the Stash

```
[user@localhost] $ git stash pop
On branch main
Changes not staged for commit:
    modified:   src/index.html
Dropped refs/stash@{0} (abc1234d5678)
```

This command restores your most recent stash and removes it from the list at the same time.

Drop a Stash (`git stash drop`)

Delete a specific stash when you no longer need it:

Example: Drop a Stash

```
[user@localhost] $ git stash drop stash@{0}
Dropped stash@{0} (abc1234d5678)
```

This command deletes a specific stash from your list when you no longer need it.

Clear All Stashes (`git stash clear`)

Delete all your stashes at once:

Example: Clear All Stashes

```
[user@localhost] $ git stash clear
```

This command deletes all your stashes at once. Be careful! This cannot be undone!

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Create a new branch and apply a stash to it.

Useful if your stashed work should become its own feature branch:

Example: Branch from a Stash

```
[user@localhost] $ git stash branch new-feature stash@{0}
Switched to a new branch 'new-feature'
On branch new-feature
Changes not staged for commit:
    modified:   src/index.html
Dropped stash@{0} (abc1234d5678)
```

This command creates a new branch and applies your stashed changes to it.

This is useful if you decide your work should become its own feature branch.

Best Practices for Stashing

- Use clear messages when stashing: `git stash push -m "WIP: feature name"`
- Don't use stashes as long-term storage-commit your work when possible.
- Check your stash list regularly and clean up old stashes you no longer need.

Troubleshooting

- **Did you lose your changes?** Try `git stash list` and `git stash apply` to recover stashed work.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

- **Accidentally cleared all stashes?** Unfortunately, `git stash clear` is permanent. Always double-check before running it!

Note: Stashes are useful for temporary work, but are not a replacement for commits!

Exercise

Drag and drop the correct command to apply and remove the most recent stash.

```
git stash
```

apply pop clear

Submit Answer »

‹ Previous Sign in to track progress Next ›

Get Certified in Git

Boost your career with an official certification

$95

Get certified




REMOVE ADS

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >

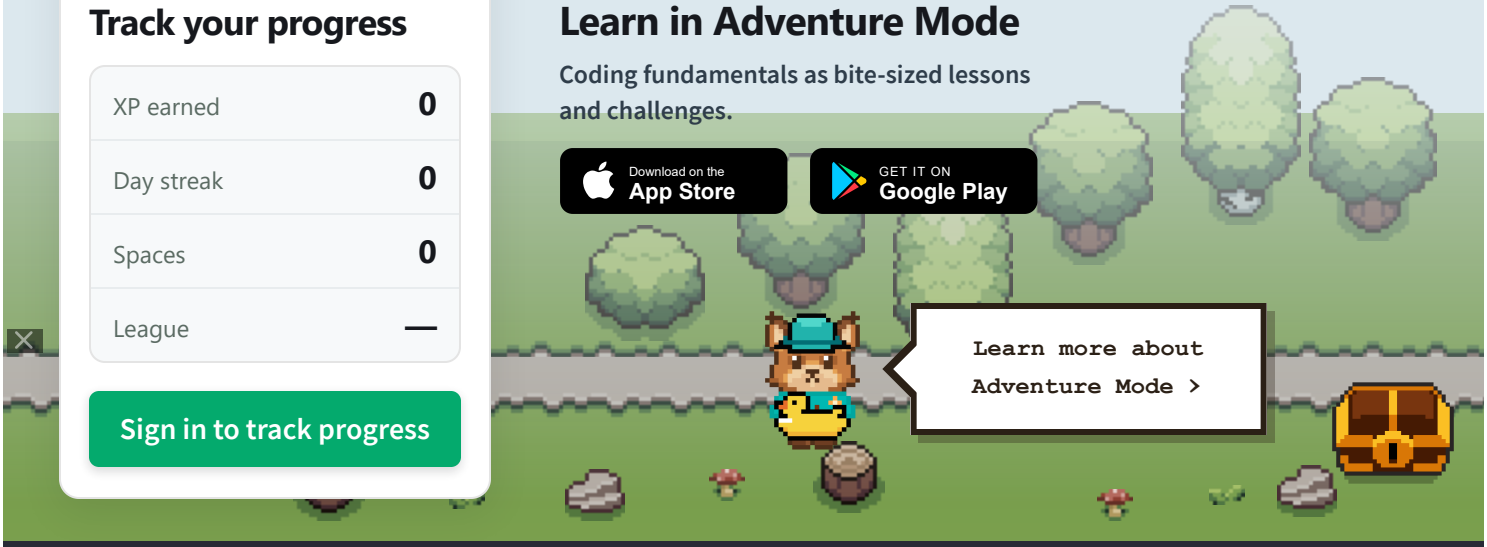

PLUS SPACES
GET CERTIFIED FOR TEACHERS
PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.