W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Git Tagging

‹ Previous Next ›

Key Commands for Tagging

SHARE

- `git tag <tagname>` - Create a lightweight tag
- `git tag -a <tagname> -m "message"` - Create an annotated tag
- `git tag <tagname> <commit-hash>` - Tag a specific commit
- `git tag` - List tags
- `git show <tagname>` - Show tag details

What is a Tag?

A **tag** in Git is like a label or bookmark for a specific commit.

Tags are most often used to mark important points in your project history, like releases (`v1.0` or `v2.0`).

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

- **Releases:** Tags let you mark when your project is ready for release, so you (and others) can always find that exact version later.
- **Milestones:** Use tags to highlight major milestones, like when a big feature is finished or a bug is fixed.
- **Deployment:** Many deployment tools use tags to know which version of your code to deploy.
- **Hotfixes:** If you need to fix an old version, tags make it easy to check out and patch the right code.

Create a Lightweight Tag

A lightweight tag is just a name for a commit.

It's quick and simple, but does not store extra information.

Annotated vs Lightweight Tags

- **Annotated Tag:** Stores author, date, and message.
  Recommended for releases and sharing with others.
- **Lightweight Tag:** Just a simple name for a commit (no extra info, like a bookmark).

Example

```
[user@localhost] $ git tag v1.0
```

REMOVE ADS

Create an Annotated Tag (`-a -m`)

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Example

```
[user@localhost] $ git tag -a v1.0 -m "Version 1.0 release"
```

Tag a Specific Commit

You can tag an older commit by specifying its hash:

Example

```
[user@localhost] $ git tag v1.1 1a2b3c4d
```

Replace `1a2b3c4d` with the commit hash you want to tag.

List Tags

See all tags in your repository:

Example

```
[user@localhost] $ git tag
```

Show Tag Details (`git show`)

See details about a tag and the commit it points to:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

Push Tags to Remote

By default, tags exist only on your local computer.

If you want others to see your tags, you need to push them to your remote repository.

If you don't push your tags, only you will see them, and only locally.

To push a single tag to your remote repository (for example, after creating a release tag):

Example: Push a Single Tag

```
[user@localhost] $ git push origin v1.0
```

Did you know? Pushing commits with `git push` does not push your tags!

You must push tags explicitly as shown above.

To push **all** your local tags to the remote at once (useful if you've created several tags):

Example: Push All Tags

```
[user@localhost] $ git push --tags
```

Delete Tags

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

```
[user@localhost] $ git tag -d v1.0
```

Delete a tag from the remote repository:

Example

```
[user@localhost] $ git push origin --delete tag v1.0
```

Update or Replace a Tag (Force Push)

If you need to move a tag to a different commit and update the remote, use `--force`:

Example

```
[user@localhost] $ git tag -f v1.0 <new-commit-hash>
[user@localhost] $ git push --force origin v1.0
```

Tagging Best Practices

- Use tags to mark releases, major milestones, or stable points in your project.
- Always use **annotated tags** (with `-a -m`) for anything public or shared.
- Create tags after passing all tests or before deploying/releasing code.

Troubleshooting

- **Tag already exists?** Use `git tag -d <tagname>` to delete it, then re-create.
- **Pushed the wrong tag?** Delete it locally and remotely, then push the correct tag.

`force origin <tagname>`, but be careful! This will overwrite the tag for everyone using the remote.

Exercise ?

Drag and drop the correct flag to create an annotated tag with a message.

```
git tag [ ] v1.0 -m "Initial release"
```

-f -d -a

Submit Answer »

‹ Previous Sign in to track progress Next ›

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

CODING IS AN ADVENTURE.

Five languages, XP and a streak worth keeping.

GET IT FREE



REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play

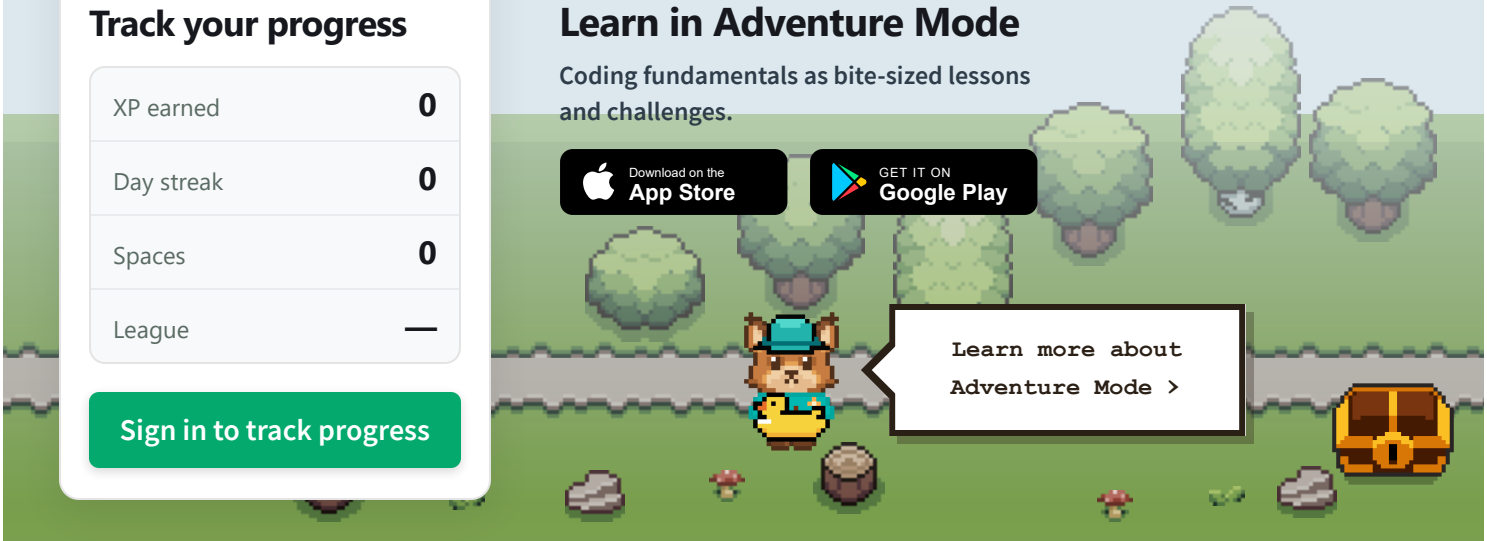

PLUS SPACES

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

C++ C# AWS W3.CSS HOW TO BOOTSTRAP REACT MYSQL JQUE

correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.