Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

MySQL ALL Operator

‹ Previous Next ›

The MySQL ALL Operator

SHARE

The `ALL` operator is used to compare a value to every value returned by a subquery.

The `ALL` operator evaluates to TRUE if **every value** in the subquery result-set meet the condition.

The `ALL` operator is typically used with `WHERE` and `HAVING` statements.

ALL Syntax

```
SELECT column_name(s)
FROM table_name
WHERE column_name operator ALL (subquery);
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Demo Database

Below is a selection from the **"Products"** table in the Northwind sample database:

ProductID	ProductName	Price
1	Chais	18.00
2	Chang	19.00
3	Aniseed Syrup	10.00
4	Chef Anton's Cajun Seasoning	22.00

And a selection from the **"OrderDetails"** table:

OrderDetailID	ProductID	Quantity
1	11	12
2	42	10
3	72	5
4	14	9

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

MySQL ALL Example

The following SQL returns the ProductName if ALL the records in the "OrderDetails" table has Quantity equal to 10. This will of course return FALSE because the Quantity column has many different values (not only the value of 10):

Example

Get your own SQL Server

```
SELECT ProductName FROM Products
WHERE ProductID = ALL (
  SELECT ProductID
  FROM OrderDetails
  WHERE Quantity = 10
);
```

Try it Yourself »

‹ Previous Next ›


Sign in to track progress

Get Certified in MySQL

Boost your career with an official certification

$95


Get certified

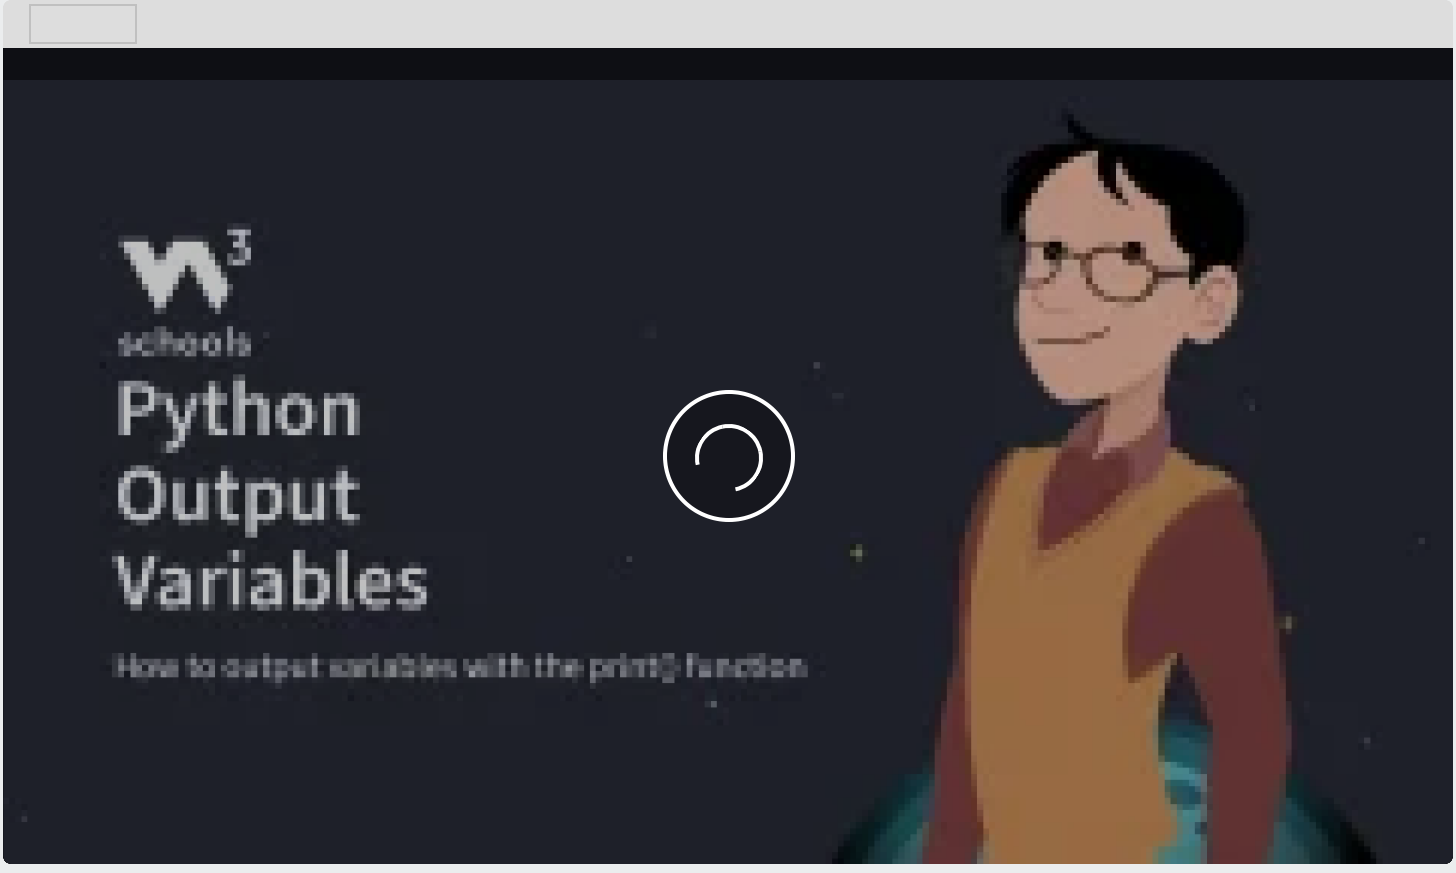

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >

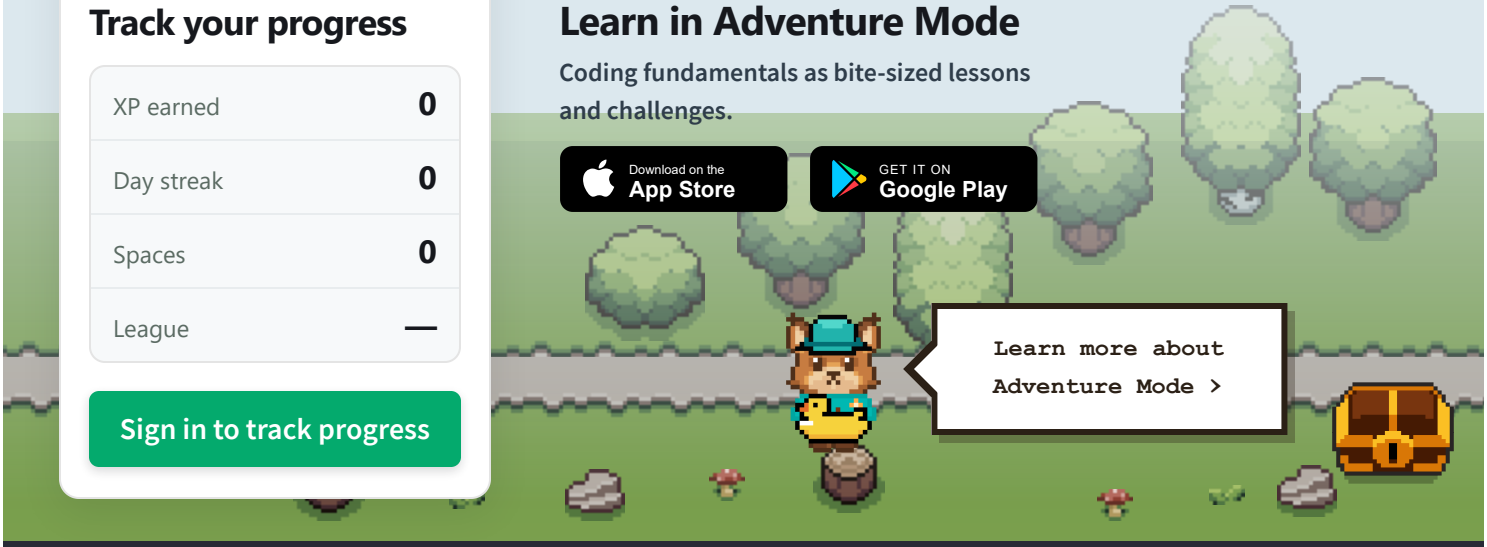

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS
PLUS SPACES
GET CERTIFIED FOR TEACHERS
PRACTICE CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References
HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples
HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Get Certified
HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.