W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

MySQL BETWEEN Operator

‹ Previous Next ›

The MySQL BETWEEN Operator

SHARE

The `BETWEEN` operator is used in the `WHERE` clause to select values within a specified range.

The range is **inclusive** - the beginning and end values of the range are included in the results.

The values can be numbers, text, or dates.

BETWEEN Syntax

```
SELECT column_name(s)
FROM table_name
WHERE column_name BETWEEN value1 AND value2;
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

ProductID	ProductName	SupplierID	CategoryID	Unit	Price
1	Chais	1	1	10 boxes x 20 bags	18.00
2	Chang	1	1	24 - 12 oz bottles	19.00
3	Aniseed Syrup	1	2	12 - 550 ml bottles	10.00
4	Chef Anton's Cajun Seasoning	1	2	48 - 6 oz jars	22.00
5	Chef Anton's Gumbo Mix	1	2	36 boxes	21.35

REMOVE ADS

BETWEEN Example

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

```
SELECT * FROM Products
WHERE Price BETWEEN 10 AND 20;
```

Try it Yourself »

NOT BETWEEN

The `NOT BETWEEN` operator is used in the `WHERE` clause to select values outside a specified range.

The following SQL returns all products with a price NOT between 10 and 20:

Example

```
SELECT * FROM Products
WHERE Price NOT BETWEEN 10 AND 20;
```

Try it Yourself »

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

BETWEEN with IN Example

The following SQL returns all products with a price between 10 and 20. In addition, the CategoryID must be either 1, 2 or 3:

Example

```
SELECT * FROM Products
WHERE Price BETWEEN 10 AND 20
AND CategoryID IN (1, 2, 3);
```

Try it Yourself »

BETWEEN Text Values Example

The following SQL selects all products with a ProductName alphabetically between "Carnarvon Tigers" and "Mozzarella di Giovanni":

Example

```
SELECT * FROM Products
WHERE ProductName BETWEEN 'Carnarvon Tigers' AND 'Mozzarella di Giovanni'
ORDER BY ProductName;
```

Try it Yourself »

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

```
SELECT * FROM Products
WHERE ProductName BETWEEN "Carnarvon Tigers" AND "Chef Anton's Cajun
Seasoning"
ORDER BY ProductName;
```

Try it Yourself »

NOT BETWEEN Text Values Example

The following SQL selects all products with a ProductName alphabetically not between "Carnarvon Tigers" and "Mozzarella di Giovanni":

Example

```
SELECT * FROM Products
WHERE ProductName NOT BETWEEN 'Carnarvon Tigers' AND 'Mozzarella di Giovanni'
ORDER BY ProductName;
```

Try it Yourself »

Sample Table

Below is a selection from the "Orders" table in the Northwind sample database:

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID

10250	34	4	1996-07-08	2
10251	84	3	1996-07-08	1
10252	76	4	1996-07-09	2

BETWEEN Dates Example

The `BETWEEN` operator is useful for filtering records within a specific date or time period. Ensure the date format matches the database (e.g. 'YYYY-MM-DD').

The following SQL selects all orders placed in July, 1996:

Example

```
SELECT * FROM Orders
WHERE OrderDate BETWEEN '1996-07-01' AND '1996-07-31';
```

Try it Yourself »

career move.
Get every certification. One payment.

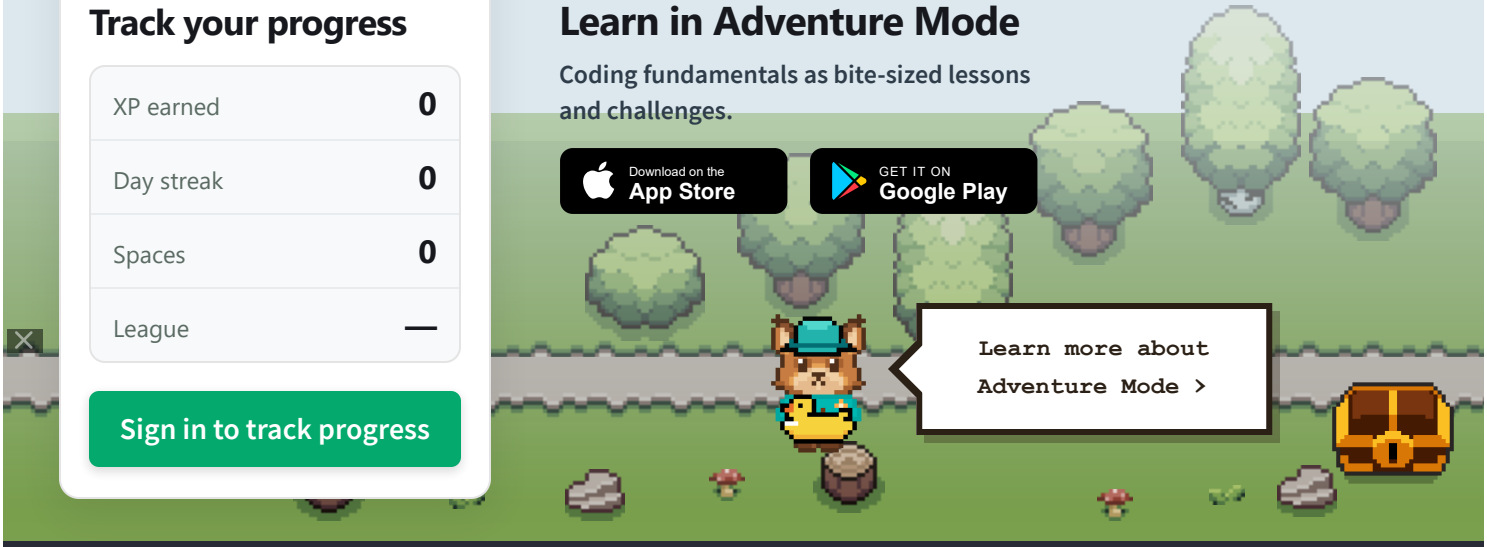

$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

W3 schools
Tutorials Exercises
W3Schools app iOS & Android NEW
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >



W3 schools
PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.