W3Schools
Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

MySQL HAVING Clause

‹ Previous
Next ›

The MySQL HAVING Clause

SHARE

The `HAVING` clause is used to filter the results of a `GROUP BY` query based on aggregate functions.

Unlike the `WHERE` clause, which filters individual rows before grouping, the `HAVING` clause filters groups **after** the aggregation has been performed.

HAVING Syntax

```
SELECT column1, aggregate_function(column2), column3, ...
FROM table_name
WHERE condition
GROUP BY column1, column3
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Demo Database

Below is a selection from the "Customers" table in the Northwind sample database:

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Co
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Ge
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Me
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Me
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK
5	Berglunds snabbköp	Christina Berglund	Berguvsvägen 8	Luleå	S-958 22	Sw

MySQL HAVING Examples

The following SQL returns the number of customers in each country - but only include countries with more than 5 customers:

Example

Get your own SQL Server

```
HAVING COUNT(CustomerID) > 5;
```

Try it Yourself »

The following SQL returns the number of customers in each country, sorted from high to low (and only include countries with more than 5 customers):

Example

```
SELECT Country, COUNT(CustomerID) AS "Number of Customers"
FROM Customers
GROUP BY Country
HAVING COUNT(CustomerID) > 5
ORDER BY COUNT(CustomerID) DESC;
```

Try it Yourself »

REMOVE ADS

Demo Database

Below is a selection from the "Orders" table in the Northwind sample database:

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID
10248	90	5	1996-07-04	3
10249	81	6	1996-07-05	1

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

And a selection from the "Employees" table:

EmployeeID	LastName	FirstName	BirthDate	Photo	Notes
1	Davolio	Nancy	1968-12-08	EmpID1.pic	Education includes a BA....
2	Fuller	Andrew	1952-02-19	EmpID2.pic	Andrew received his BTS....
3	Leverling	Janet	1963-08-30	EmpID3.pic	Janet has a BS degree....

More HAVING Examples

The following SQL returns the employees that have registered more than 10 orders:

Example

```
SELECT Employees.LastName, COUNT(Orders.OrderID) AS NumberOfOrders
FROM (Orders
INNER JOIN Employees ON Orders.EmployeeID = Employees.EmployeeID)
GROUP BY LastName
HAVING COUNT(Orders.OrderID) > 10;
```

Try it Yourself »

The following SQL returns if the employees "Davolio" or "Fuller" have registered more than 25 orders:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
SELECT Employees.LastName, COUNT(Orders.OrderID) AS NumberOfOrders
FROM Orders
INNER JOIN Employees ON Orders.EmployeeID = Employees.EmployeeID
WHERE LastName = 'Davolio' OR LastName = 'Fuller'
GROUP BY LastName
HAVING COUNT(Orders.OrderID) > 25;
```

Try it Yourself »

Exercise ?

Drag and drop the correct syntax to lists the employees that have registered more than 10 orders.

```
SELECT Employees.LastName, COUNT(Orders.OrderID) AS
NumberOfOrders
[          ] (Orders INNER JOIN Employees ON Orders.EmployeeID
= Employees.EmployeeID)
GROUP BY LastName
[          ] COUNT(Orders.OrderID) > [          ];
```

COUNT FROM GROUP BY HAVING WHERE ORDER BY 10

Submit Answer »

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

schools

CODING IS AN ADVENTURE.

Five languages, XP and a streak worth keeping.

GET IT FREE



REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

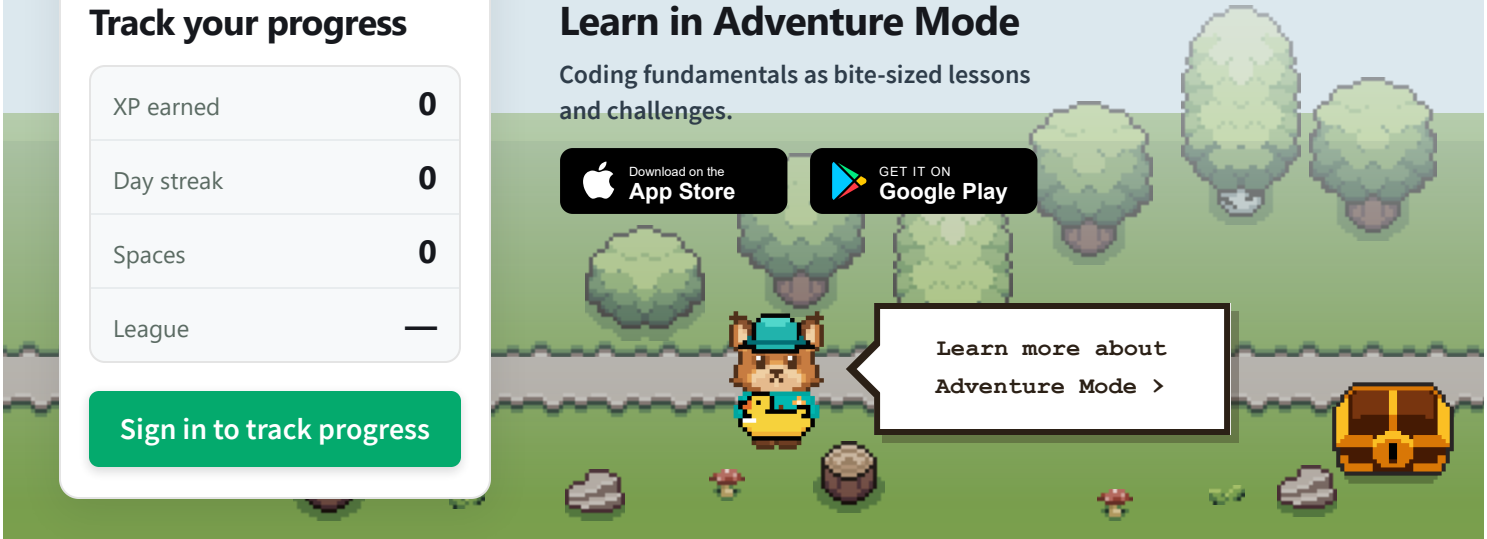

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.