W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

MySQL IN Operator

‹ Previous
Next ›

The MySQL IN Operator

SHARE

The `IN` operator is used in the `WHERE` clause to check if a specified column's value matches any value within a provided list.

The `IN` operator functions as a shorthand for multiple `OR` conditions, making queries shorter and more readable.

IN Syntax

```
SELECT column_name(s)
FROM table_name
WHERE column_name IN (value1, value2, ...);
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Co
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Ge
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Me
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Me
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK
5	Berglunds snabbköp	Christina Berglund	Berguvsvägen 8	Luleå	S-958 22	Sw

REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

The following SQL uses the `IN` operator to select all customers from Germany, France, or UK:

Example

Get your own SQL Server

```
SELECT * FROM Customers
WHERE Country IN ('Germany', 'France', 'UK');
```

Try it Yourself »

The NOT IN Operator

By using the `NOT IN` operator, you return all records that are NOT any of the values in the list.

The following SQL selects all customers that are NOT located in "Germany", "France" or "UK":

Example

```
SELECT * FROM Customers
WHERE Country NOT IN ('Germany', 'France', 'UK');
```

Try it Yourself »

W3Schools app iOS & Android NEW Sign In

Tutorials Exercises

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

IN (SELECT)

You can also use `IN` with a subquery in the `WHERE` clause.

With a subquery you can return all records from the main query that are present in the result of the subquery.

The following SQL returns all customers who also have an order in the "Orders" table:

Example

```
SELECT * FROM Customers
WHERE CustomerID IN (SELECT CustomerID FROM Orders);
```

Try it Yourself »

NOT IN (SELECT)

The result in the example above returned 89 records, that means that there are 2 customers that haven't placed any orders.

Let us check if that is correct, by using the `NOT IN` operator.

The following SQL returns all customers who do NOT have any orders in the "Orders" table:

Example

Try it Yourself »

Exercise ?

Drag and drop all the keywords to form a legal SQL statment:

```
[          ] * [          ] Customers
[          ] Country [          ] ('Norway', 'Sweden', 'Denmark');
```

IN FROM WHERE SELECT

Submit Answer »

‹ Previous Sign in to track progress Next ›

Get Certified in MySQL

Boost your career with an official certification

$95

Get certified



REMOVE ADS

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

Learn more about Adventure Mode >

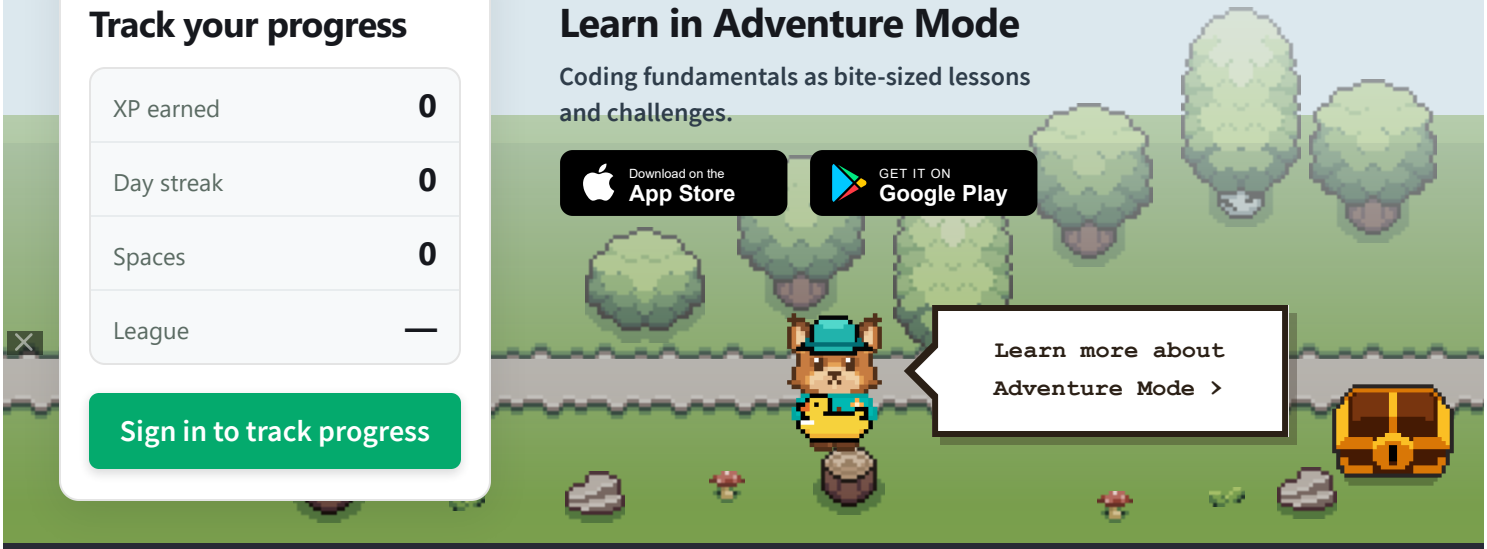

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.