Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

MySQL NOT Operator

‹ Previous Next ›

The MySQL NOT Operator

SHARE

The `NOT` operator is used in the `WHERE` clause to return all records that DO NOT match the specified criteria. It reverses the result of a condition from true to false and vice-versa.

The following SQL selects all customers that are NOT from Germany:

Example

Get your own SQL Server

```
SELECT * FROM Customers
WHERE NOT Country = 'Germany';
```

Try it Yourself »

In the example above, the `NOT` operator is used in combination with the `=` operator.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

- `NOT IN`
- `IS NOT NULL`
- `NOT EXISTS`

NOT Syntax

```
SELECT column1, column2, ...
FROM table_name
WHERE NOT condition;
```

Demo Database

Below is a selection from the "Customers" table in the Northwind sample database:

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Co
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Ge
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Me
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Me
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

Combining AND, OR and NOT

You can also combine the `AND`, `OR` and `NOT` operators.

The following SQL selects all customers where country is "Germany" AND city must be "Berlin" OR "Stuttgart" (use parenthesis to form complex expressions):

Example

```
SELECT * FROM Customers
WHERE Country = 'Germany' AND (City = 'Berlin' OR City = 'Stuttgart');
```

Try it Yourself »

The following SQL selects all customers where country is NOT "Germany" and NOT "USA":

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
SELECT * FROM Customers
WHERE NOT Country = 'Germany' AND NOT Country = 'USA';
```

Try it Yourself »



REMOVE ADS

The NOT LIKE Operator

The `NOT LIKE` operator is used in the `WHERE` clause to exclude rows that match a specified character pattern.

There are two wildcards often used in conjunction with the `NOT LIKE` operator:

- A percent sign `%` - represents zero, one, or multiple characters
- A underscore sign `_` - represents a single character

The following SQL selects all customers that do NOT start with the letter "A":

Example

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Try it Yourself »

The NOT BETWEEN Operator

The `NOT BETWEEN` operator is used in the `WHERE` clause to select rows where a value falls outside a specified inclusive range.

The `NOT BETWEEN` operator can be used with numeric, text, or date values.

The following SQL selects all customers with a CustomerID NOT between 10 and 60:

Example

Select customers with a customerID not between 10 and 60:

```
SELECT * FROM Customers
WHERE CustomerID NOT BETWEEN 10 AND 60;
```

Try it Yourself »

The NOT IN Operator

The `NOT IN` operator is used in the `WHERE` clause to exclude rows that match any value in a specified list or a subquery result set.

The following SQL selects all customers with Country NOT IN "Paris" or "London":

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
SELECT * FROM Customers
WHERE City NOT IN ('Paris', 'London');
```

Try it Yourself »

NOT Greater Than

In SQL, the "NOT Greater Than" condition is most often expressed with the standard greater than or equal to (>=) operator.

The following SQL selects all customers with a CustomerID not greater than 50:

Example

Select customers with a CustomerId not greater than 50:

```
SELECT * FROM Customers
WHERE NOT CustomerID > 50;
```

Try it Yourself »

NOT Less Than

In SQL, the "NOT Less Than" condition is most often expressed with the standard less than or equal to (<=) operator.

The following SQL selects all customers with a CustomerID not less than 50:

```
SELECT * FROM Customers
WHERE NOT CustomerId < 50;
```

Try it Yourself »

‹ Previous Sign in to track progress Next ›


Get Certified in MySQL

Boost your career with an official certification

$95

Get certified

REMOVE ADS

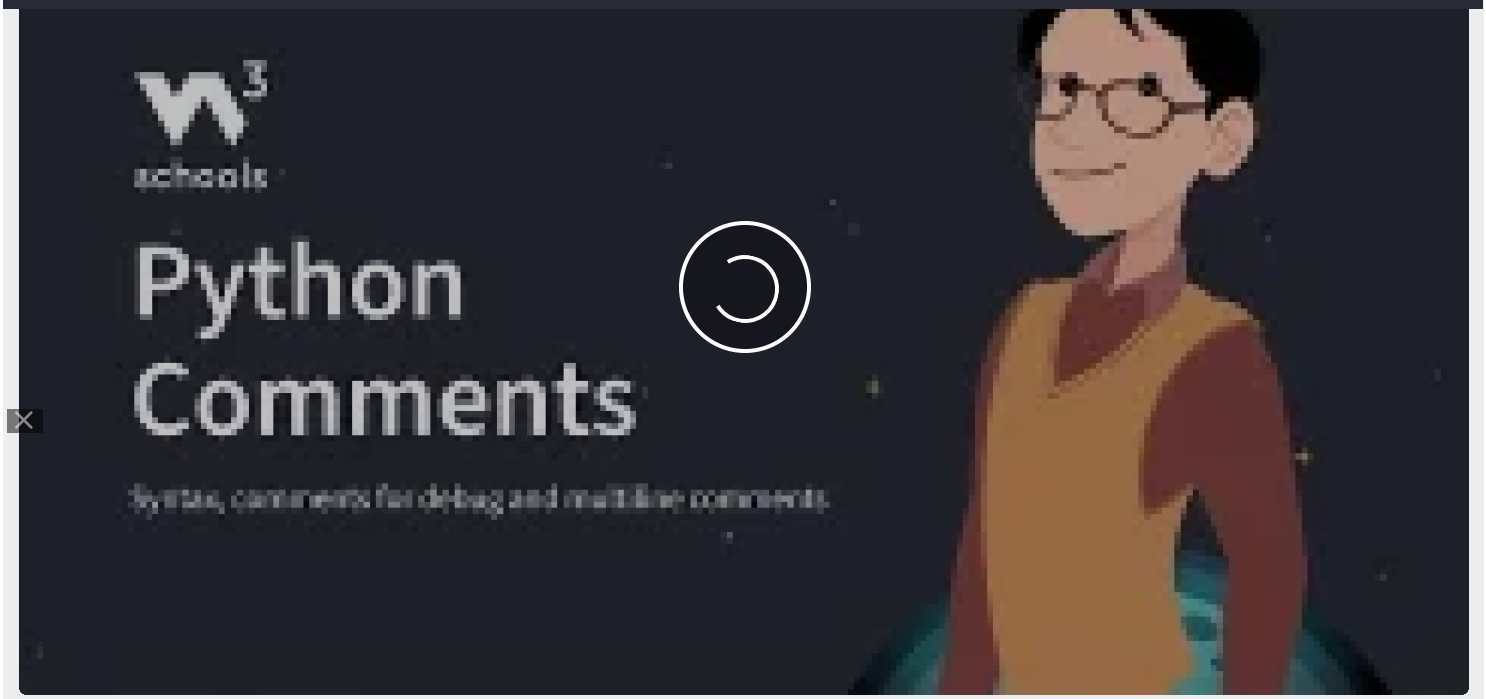
Python
Comments

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

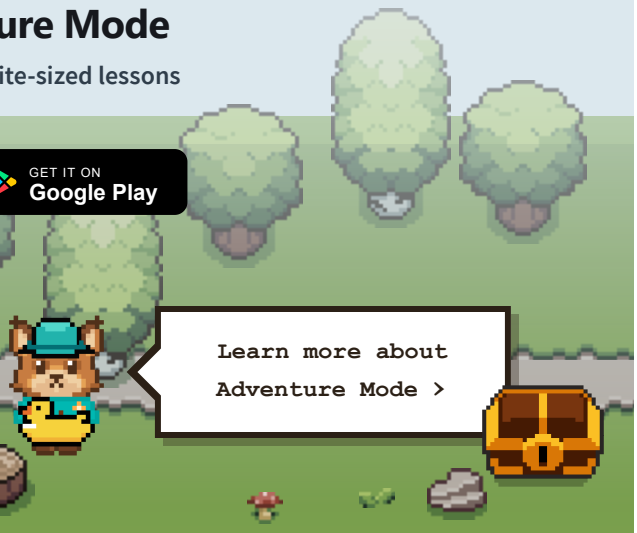

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.