Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React CSS Modules

‹ Previous Next ›

CSS Modules let you write CSS that is scoped locally to a specific component.

This prevents CSS class name conflicts and makes your styles more maintainable.

What are CSS Modules?

SHARE

In React, CSS Modules are CSS files where class names are scoped locally by default.

Note: CSS Modules are not a part of the React core library, but are supported by many React build tools.

The CSS file have to have the `.module.css` extension and can be used by importing it into your React file(s).

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

Get your own React.js Server

Create a file named `Button.module.css`, and insert some styles in it:

Button.module.css

```
.mybutton {
  padding: 10px 20px;
  border: none;
  border-radius: 4px;
  cursor: pointer;
}
```

Using a CSS Module

Import and use the CSS Module in your component:

Example

Create a Button component that uses the CSS Module:

```
import styles from './Button.module.css';

function App() {
  return (
    <div>
      <button className={styles.mybutton}>
        My Button
      </button>
    </div>
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Run Example »

Example Explained

- We import the styles object from the CSS Module
- We use `styles.mybutton` to access the `mybutton` class
- The actual class name of the button will be unique (e.g., `_mybutton_q1obu_1`)

REMOVE ADS

Multiple Classes

In the example above, we only used one class, but let's add more classes:

Example

Add more styles in `Button.module.css`:

W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
  padding: 10px 20px;
  border: none;
  border-radius: 4px;
  cursor: pointer;
}

.primary {
  background-color: #007bff;
  color: white;
}

.secondary {
  background-color: #6c757d;
  color: white;
}
```

To demostrate the changes, we need to have two buttons, with two classes each:

Example

An example with two buttons, with different styling:

```
import styles from './Button.module.css';

function App() {
  return (
    <div>
      <button className={`${styles.mybutton} ${styles.primary}`}>
        My Primary Button
      </button>
      <button className={`${styles.mybutton} ${styles.secondary}`}>
        My Secondary Button
      </button>
    </div>
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Run Example »

REMOVE ADS

Composing Classes

CSS Modules allow you to combine classes using the `composes` keyword:

Which means that one class can inherit the styles of another class.

For the previous example, both the `primary` and the `secondary` classes are depending on the styles of the `mybutton` class.

This can be done by adding `composes: mybutton` to the `primary` and `secondary` classes:

Example

`Button.module.css`

W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
  border-radius: 4px;
  cursor: pointer;
}

.primary {
  composes: mybutton;
  background-color: #007bff;
  color: white;
}

.secondary {
  composes: mybutton;
  background-color: #6c757d;
  color: white;
}
```

Now it is enough to use the `primary` and `secondary` classes in the component:

Example

```
import styles from './Button.module.css';

function App() {
  return (
    <div>
      <button className={styles.primary}>
        Primary Button
      </button>
      <button className={styles.secondary}>
        Secondary Button
      </button>
    </div>
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Run Example »

Global Classes

When using CSS Modules, the classes in the `.module.css` file can only be used in the component that imports them. This is done by prefixing the class name with a hash of the file name and a unique identifier. It is safe to use the same class name in different files, as the names will be unique.

However, sometimes you want your classes to be available globally, and use them in other components.

You can do this with the `:global` syntax:

Example

Here is a CSS Module with a global class named `.myheader`:

BlueHeader.module.css

```
:global(.myheader) {
  padding: 10px 20px;
  font-size: 50px;
  color: white;
  background-color: dodgerblue;
}
```

The `:global` wrapper makes the class available for everyone.

It is simply called `.myheader` and not prefixed and added a unique identifier like `_myheader_q1obu_1`

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

```
import styles from './BlueHeader.module.css';

function App() {
  return (
    <div>
      <h1 className="myheader">
        My Header
      </h1>
    </div>
  );
}
```

Run Example »

Combine Global and Local Classes

You can combine global and local classes in the same CSS Module:

Example

A CSS Module with both global and local classes:

MyStyles.module.css

```
:global(.myheader) {
  padding: 10px 20px;
  font-size: 50px;
  color: white;
  background-color: dodgerblue;
}
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
  background-color: purple;
}
```

Use it in your components like this:

Example

```
import styles from './MyStyles.module.css';

function App() {
  return (
    <div>
      <h1 className="myheader">
        My Header
      </h1>
      <p className={styles.myparagraph}>
        My Paragraph
      </p>
    </div>
  );
}
```

Run Example »

Exercise ?

What is the main purpose of CSS Modules in React?

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

- To add animations automatically
- To combine all CSS into one file

Submit Answer »

‹ Previous

Sign in to track progress

Next ›

Build skills. Get hired.


$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

W3Schools
Tutorials Exercises
W3Schools app iOS & Android NEW
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

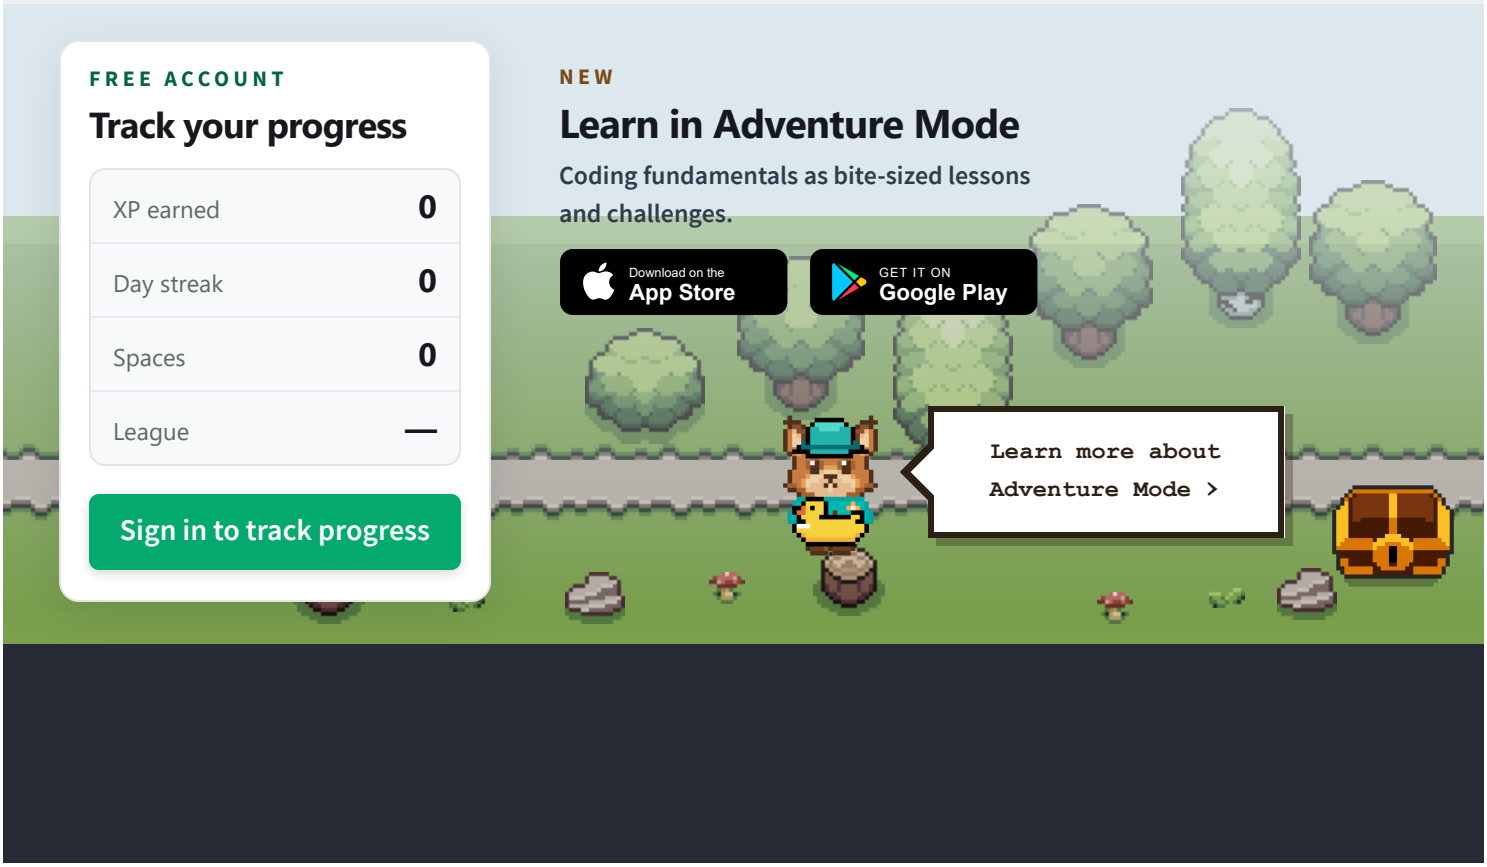

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.