W3Schools
Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

# Styling React Using CSS

‹ Previous Next ›

There are many ways to style React with CSS, this tutorial will take a closer look at three common ways:

- Inline styling
- CSS stylesheets
- CSS Modules

## Inline Styling

SHARE

To style an element with the inline style attribute, the value must be a JavaScript object:

### Example:

Get your own React.js Server

Insert an object with the styling information:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
      <h1 style={{color: "red"}}>Hello Style!</h1>
      <p>Add a little style!</p>
    </>
  );
}
```

Run Example »

**Note:** In JSX, JavaScript expressions are written inside curly braces, and since JavaScript objects also use curly braces, the styling in the example above is written inside two sets of curly braces `{{}}`.

## camelCased Property Names

Since the inline CSS is written in a JavaScript object, properties with hyphen separators, like `background-color`, must be written with camel case syntax:

## Example:

Use `backgroundColor` instead of `background-color`:

```
const Header = () => {
  return (
    <>
      <h1 style={{backgroundColor: "lightblue"}}>Hello Style!</h1>
      <p>Add a little style!</p>
    </>
  );
}
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

## JavaScript Object

You can also create an object with styling information, and refer to it in the style attribute:

### Example:

Create a style object named `myStyle`:

```
const Header = () => {
  const myStyle = {
    color: "white",
    backgroundColor: "DodgerBlue",
    padding: "10px",
    fontFamily: "Sans-Serif"
  };
  return (
    <>
      <h1 style={myStyle}>Hello Style!</h1>
      <p>Add a little style!</p>
    </>
  );
}
```

Run Example »

W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS
REMOVE ADS

# CSS Stylesheet

You can write your CSS styling in a separate file, just save the file with the `.css` file extension, and import it in your application.

## Example

Create a new file called "MyStylesheet.css" and insert some CSS code in it:

MyStylesheet.css

```
body {
  background-color: #282c34;
  color: white;
  padding: 40px;
  font-family: Sans-Serif;
  text-align: center;
}
```

**Note:** You can call the file whatever you like, just remember the correct file extension.

Import the stylesheet in your application:

W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

index.js

```
import { createRoot } from 'react-dom/client';
import './MyStylesheet.css';

const Header = () => {
  return (
    <>
      <h1>Hello Style!</h1>
      <p>Add a little style!.</p>
    </>
  );
}

createRoot(document.getElementById('root')).render(
  <Header />
);
```

Run Example »

React knows that files imported with the .css extension, should be treated as a CSS Stylesheet.

Note: The styles will only be available for the component that imported it.

# CSS Modules

Another way of adding styles to your application is to use CSS Modules.

CSS Modules are convenient for components that are placed in separate files.

W3Schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Create the CSS module with the `.module.css` extension, example: `my-style.module.css`.

## Example

Create a new file called "my-style.module.css" and insert some CSS code in it:

my-style.module.css

```
.bigred {
  color: Tomato;
  padding: 40px;
  font-family: Sans-Serif;
  text-align: center;
}
```

Import the stylesheet in your component:

## Example

Use `import styles` to import the stylesheet:

index.jsx

```
import { createRoot } from 'react-dom/client';
import styles from './my-style.module.css';

const Car = () => {
  return <h1 className={styles.bigred}>Hello Car!</h1>;
}
```

Run Example »

You will learn more about CSS Modules in the next chapter.

‹ Previous

Sign in to track progress

Next ›




REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

Learn more about Adventure Mode >

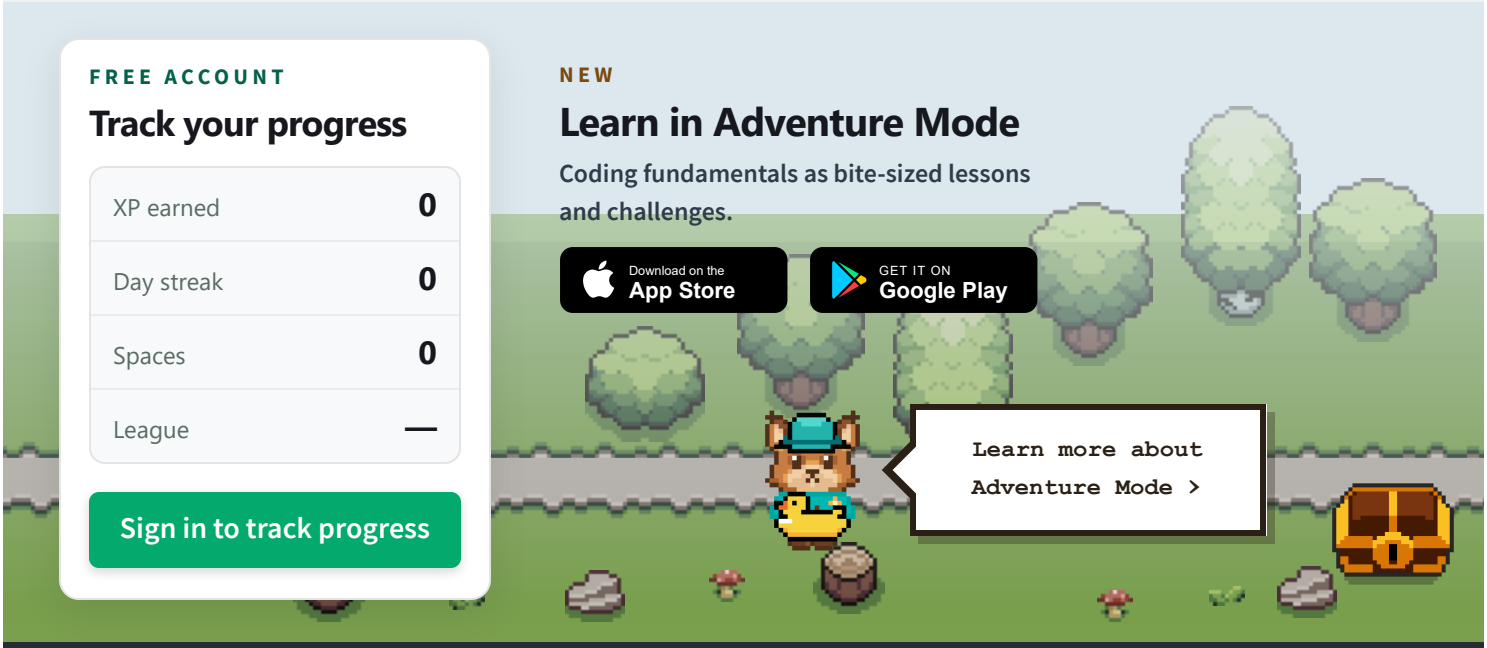

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

## Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

## Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

## Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples

## Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate

Tutorials Exercises





W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS







FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.