W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React CSS-in-JS

‹ Previous Next ›

What is CSS-in-JS?

SHARE

CSS-in-JS is a styling technique where you can write CSS directly in your JavaScript code.

This approach allows you to:

- Write CSS using JavaScript
- Create component-scoped styles
- Use dynamic styles based on props
- Avoid CSS class name conflicts

In this tutorial, we'll use the popular `styled-components` library.

Getting Started

W3Schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
npm install styled-components
```

Now you can start writing CSS directly in your .jsx files:

Example

Get your own React.js Server

Insert styles directly in the .jsx files:

```
import styled from 'styled-components';

const MyHeader = styled.h1`
  padding: 10px 20px;
  background-color: #007bff;
  color: white;
`;

function App() {
  return (
    <>
      <MyHeader>Welcome!</MyHeader>
    </>
  );
}
```

Run Example »

Without CSS-in-JS, you would have to either:

- Write CSS in a separate .css file and import it into your React components
- Use inline styles

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

- You can use regular CSS syntax

REMOVE ADS

Props in Styled Components

Another powerful feature of CSS-in-JS is the ability to use props to make styles dynamic.

Let's create an example where we have two buttons, one primary and one secondary.

We want to base their background color on the value of the `btntype` prop:

Example

```
import styled from 'styled-components';

const Button = styled.button`
  padding: 10px 20px;
  border: none;
```

```
`;

function App() {
  return (
    <div>
      <Button btntype="primary">Primary Button</Button>
      <br />
      <br />
      <Button>Secondary Button</Button>
    </div>
  );
}
```

Run Example »

Extending Styles

Another way of letting multiple elements have the same styles is to extend existing styled components.

For example, we can create a `PrimaryButton` and `SuccessButton` that both have the same styles as the `Button` component, but they also have separate background colors:

Example

```
import styled from 'styled-components';

const Button = styled.button`
  padding: 10px 20px;
  border: none;
  border-radius: 4px;
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
const PrimaryButton = styled(Button)`
  background-color: #007bff;
`;

const SuccessButton = styled(Button)`
  background-color: #28a745;
`;

function App() {
  return (
    <div>
      <PrimaryButton>Primary</PrimaryButton>
      <SuccessButton>Success</SuccessButton>
    </div>
  );
}
```

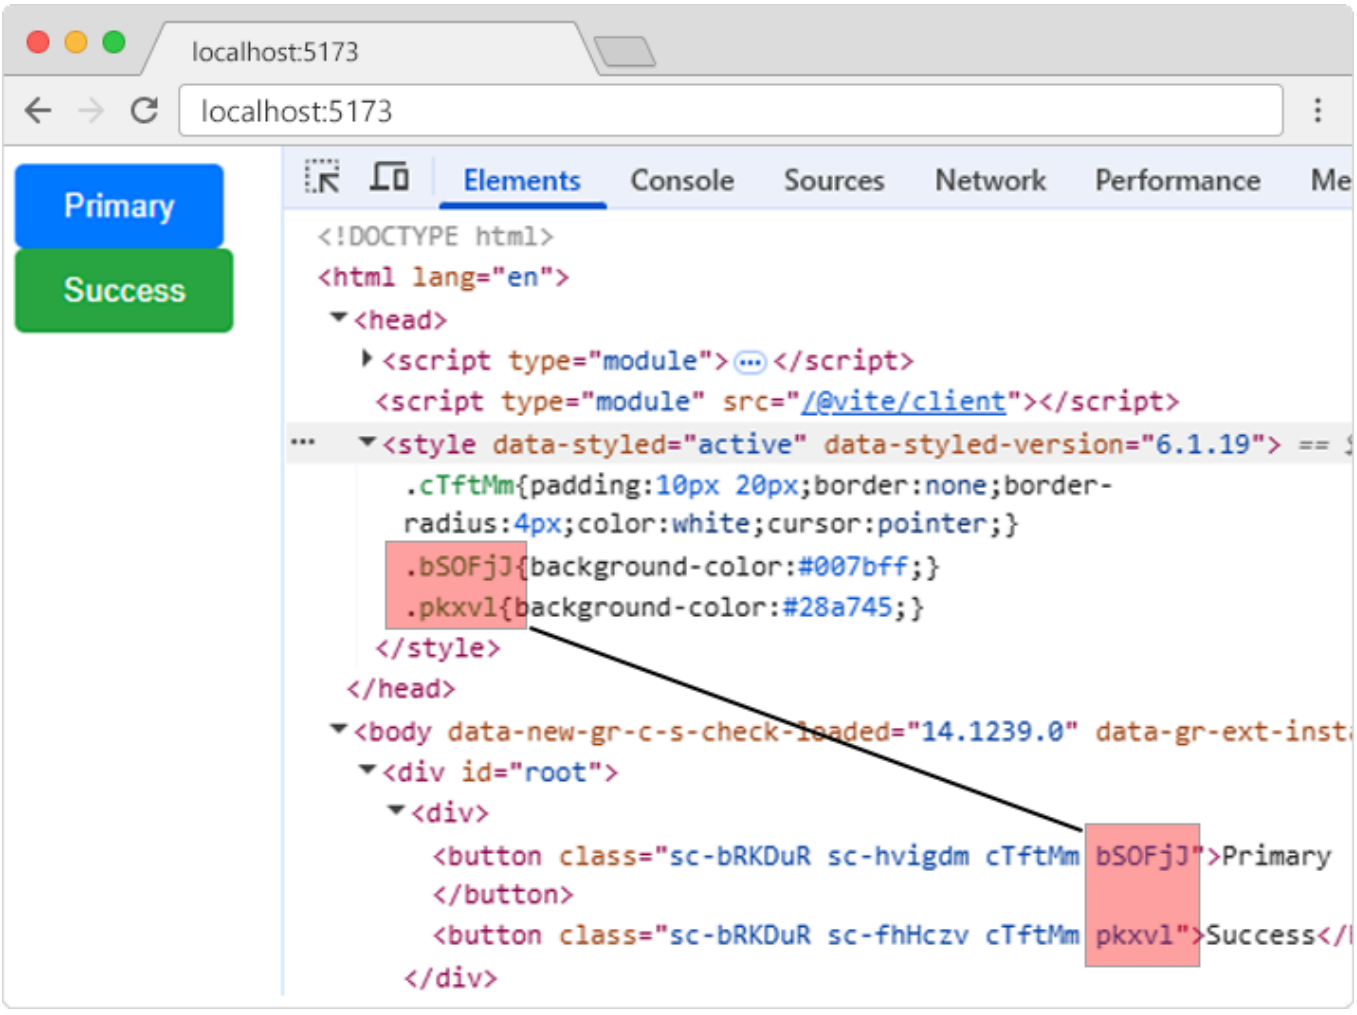
Run Example »

REMOVE ADS

W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

They are given unique names and can only be used in the component that imports them.

If we view the source of the page in the example above, the buttons will have unique class names like `bSOFjJ` and `pkxvl`, and will be refering to the CSS with the same unique class names in the style section.



Global Styles

You can also create global styles, which will be given normal class name and will be available for all components:

W3Schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
import { createGlobalStyle } from 'styled-components';

const GlobalStyle = createGlobalStyle`
  h1 {
    color: white;
    background-color: purple;
    font-family: Arial, sans-serif;
  }

  .myparagraph {
    font-family: courier, monospace;
    color: blue;
  }
`;

function App() {
  return (
    <>
      <GlobalStyle />
      <h1>Welcome!</h1>
      <p className="myparagraph">This paragraph is styled with global style
    </>
  );
}
```

Run Example »

If we view the source of the result in the example above, the CSS will have normal names and will be available for all components.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS



Exercise

What is a key benefit of CSS-in-JS in React?

- Faster page loading
- Automatic browser prefixing
- Built-in CSS minification
- Component-scoped styles with unique class names

Submit Answer »

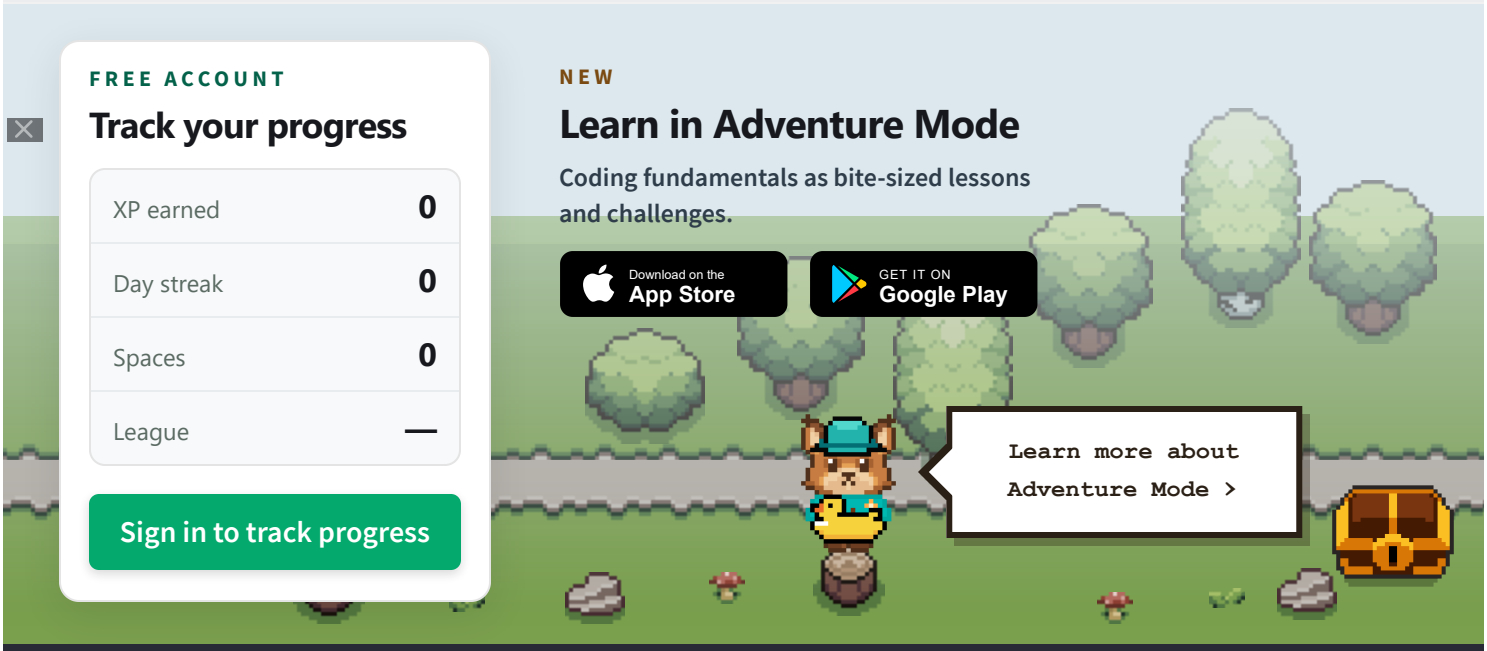

schools
CODING IS AN ADVENTURE.
Five languages, XP and a streak worth keeping.
GET IT FREE

REMOVE ADS

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >



PLUS SPACES
GET CERTIFIED FOR TEACHERS
PRACTICE CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

