W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React Conditional Rendering

‹ Previous Next ›

In React, you can conditionally render components.

There are several ways to do this.

`if` Statement

SHARE

We can use the `if` JavaScript operator to decide which component to render.

Example:

Get your own React.js Server

We'll use these two components:

```
function MissedGoal() {
  return <h1>MISSED!</h1>;
}
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example:

Now, we'll create another component that chooses which component to render based on a condition:

```
function Goal(props) {
  const isGoal = props.isGoal;
  if (isGoal) {
    return <MadeGoal/>;
  }
  return <MissedGoal/>;
}

createRoot(document.getElementById('root')).render(
  <Goal isGoal={false} />
);
```

Run Example »

Try changing the `isGoal` attribute to `true`:

Example:

```
createRoot(document.getElementById('root')).render(
  <Goal isGoal={true} />
);
```

Run Example »

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

Logical && Operator

Another way to conditionally render a React component is by using the `&&` operator.

In the example below, the heading will only be rendered if the `props.brand` property is not empty:

Example:

The right side of `&&` will only be rendered if the left side is true:

```
function Car(props) {
  return (
    <>
      {props.brand && <h1>My car is a {props.brand}!</h1>}
    </>
  );
}

createRoot(document.getElementById('root')).render(
```

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Run Example »

If `props.brand` evaluates to true, the expression after `&&` will render.

Try emptying the `brand` property:

Example:

```
createRoot(document.getElementById('root')).render(
  <Car />
);
```

Run Example »

Ternary Operator

Another way to conditionally render elements is by using a ternary operator.

```
condition ? true : false
```

We will go back to the goal example.

Example:

Return the `MadeGoal` component if `isGoal` is `true`, otherwise return the `MissedGoal` component:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
    <>
      { isGoal ? <MadeGoal/> : <MissedGoal/> }
    </>
  );
}

createRoot(document.getElementById('root')).render(
  <Goal isGoal={false} />
);
```

Run Example »

To learn more, see the ternary operator section.

❮ Previous Sign in to track progress Next ❯

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started



REMOVE ADS

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

Learn more about Adventure Mode >

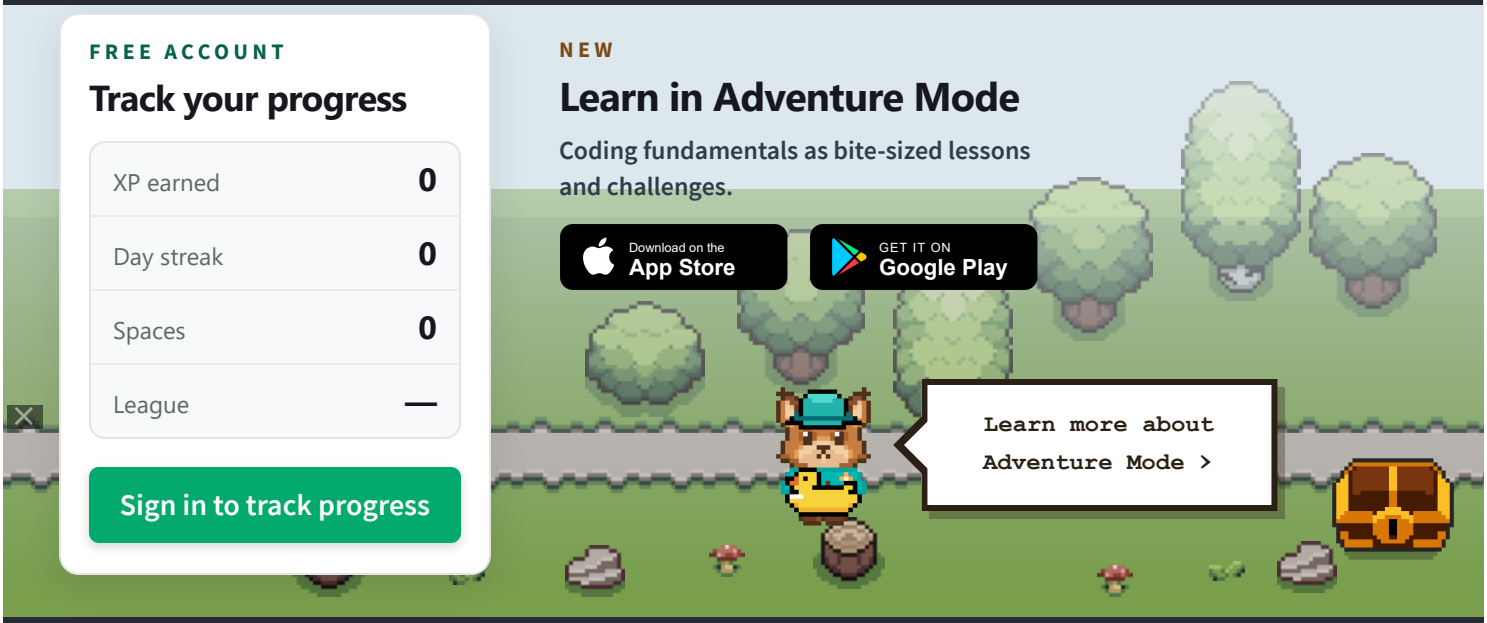

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.