Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React Destructuring Props

‹ Previous Next ›

Destructuring Props

SHARE

You can limit the properties a component receives by using destructuring.

Example

Get your own React.js Server

The component knows it only need the `color` property, so in the function definition, it only specifies that:

```
function Car({color}) {
  return (
    <h2>My car is {color}!</h2>
  );
}

createRoot(document.getElementById('root')).render(
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Run Example »

Note: React uses curly brackets to destructure props: `{color}`.

uses the ones it needs.

Example

The component receives all the properties, but uses destructuring to limit the properties inside the component.

```
function Car(props) {
  const {brand, model} = props;
  return (
    <h2>I love my {brand} {model}!</h2>
  );
}

createRoot(document.getElementById('root')).render(
  <Car brand="Ford" model="Mustang" color="red" year={1969} />
);
```

Run Example »

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS
REMOVE ADS

Destructuring `...rest`

When you don't know how many properties you will receive, you can use the `...rest` operator.

Meaning: you can specify the properties you need, and the rest will be stored in an object.

Example

The component specifies the color and the brand, but the rest is stored in an object like this: `{ model: "Mustang", year: 1969 }`.

```
function Car({color, brand, ...rest}) {
  return (
    <h2>My {brand} {rest.model} is {color}!</h2>
  );
}

createRoot(document.getElementById('root')).render(
  <Car brand="Ford" model="Mustang" color="red" year={1969} />
);
```

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Default Values

With Destructuring, you can set default values for props.

If a property has no value, the default value will be used.

Example

Set the default color value to "blue":

```
function Car({color = "blue", brand}) {
  return (
    <h2>My {color} {brand}!</h2>
  );
}

createRoot(document.getElementById('root')).render(
  <Car brand="Ford" />
);
```

Run Example »

‹ Previous Next ›

Sign in to track progress

Get Certified in React


Boost your career with an official certification

$95

Get certified




REMOVE ADS

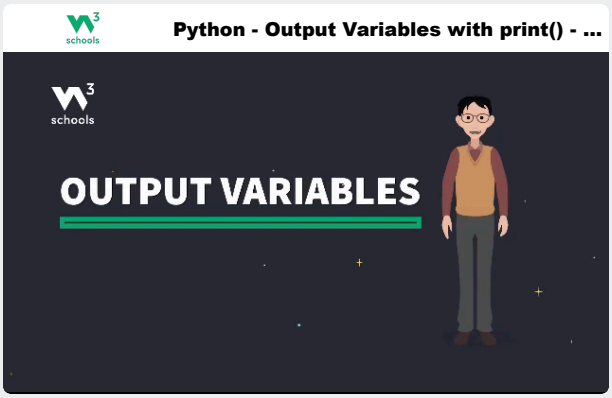

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play

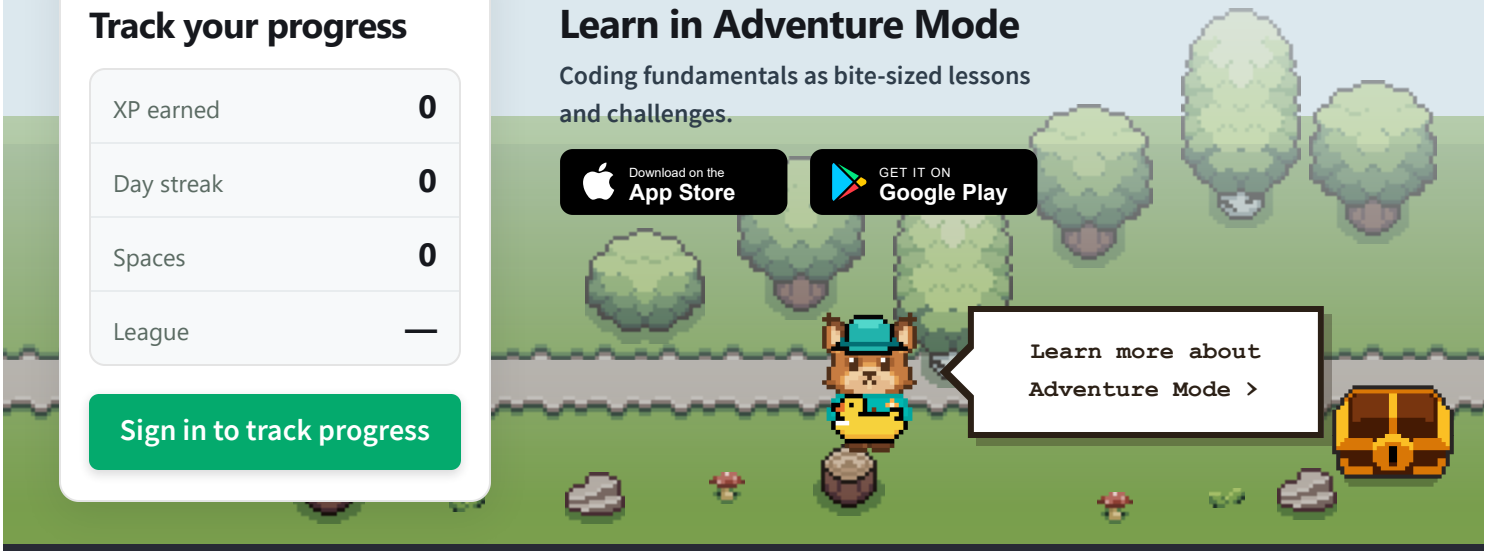

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS

Tutorials Exercises





W3Schools app NEW
iOS & Android

Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

