Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

JavaScript Array map()

‹ Previous Next ›

The map() Method

SHARE

The `map()` method creates a new array with the results of calling a function for every array element.

Example

Get your own React.js Server

Multiply each number by 2:

```
const numbers = [1, 2, 3, 4];
const doubled = numbers.map(x => x * 2);
```

Try it Yourself »

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

```
const fruitlist = ['apple', 'banana', 'cherry'];

function MyList() {
  return (
    <ul>
      {fruitlist.map(fruit =>
        <li key={fruit}>{fruit}</li>
      )}
    </ul>
  );
}
```

Try it Yourself »

Note: When using `map()` in React to create list items, each item needs a unique `key` prop.

map() with Objects

You can also use `map()` with arrays of objects:

Example

```
const users = [
  { id: 1, name: 'John', age: 30 },
```

```
function UserList() {
  return (
    <ul>
      {users.map(user =>
        <li key={user.id}>
          {user.name} is {user.age} years old
        </li>
      )}
    </ul>
  );
}
```

Try it Yourself »

REMOVE ADS

map() Parameters

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

- `array` - The array that map was called upon (optional)

Example

```
const fruitlist = ['apple', 'banana', 'cherry'];

function App() {
  return (
    <ul>
      {fruitlist.map((fruit, index, array) => {
        return (
          <li key={fruit}>
            Name: {fruit}, Index: {index}, Array: {array}
          </li>
        );
      })}
    </ul>
  );
}
```

Try it Yourself »

Note: The `map()` method always returns a new array. It does not modify the original array.

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Get Certified in React

Boost your career with an official certification


$95

Get certified

REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

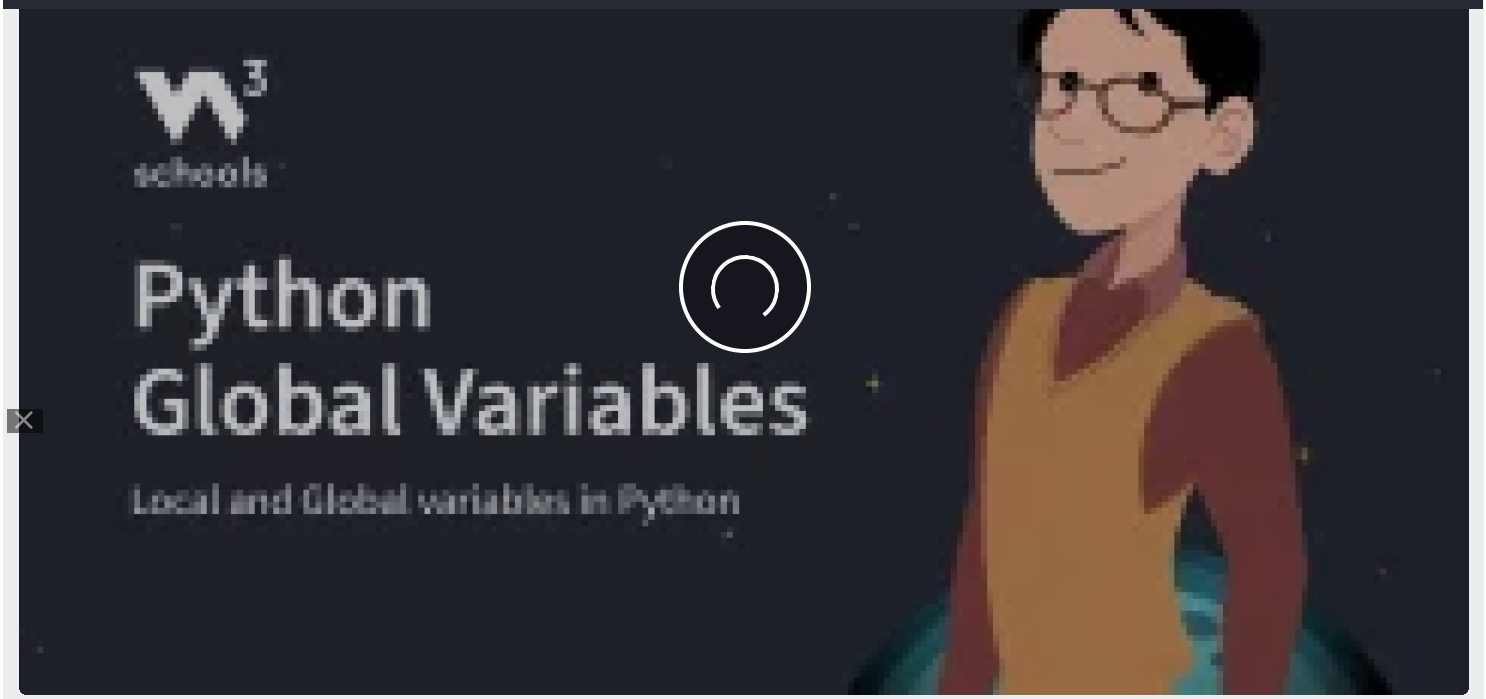

Tutorials Exercises
W3Schools app NEW
iOS & Android
Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS


FREE ACCOUNT
Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play

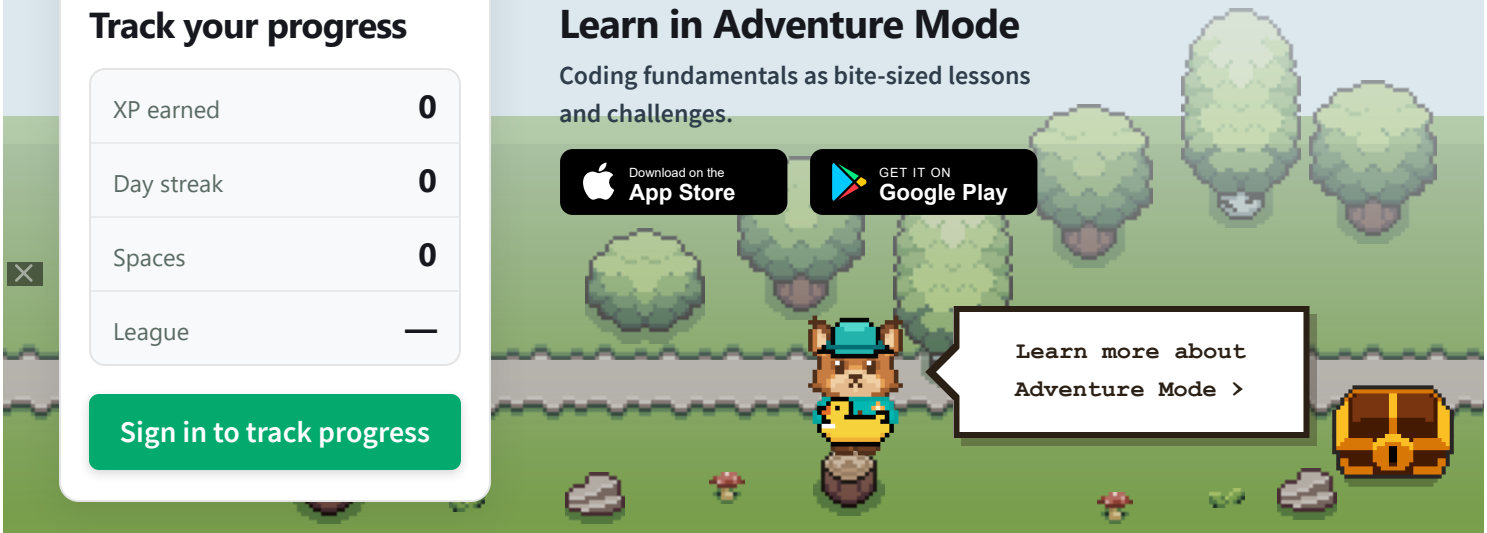

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.