React ES6 Template Strings

‹ Previous Next ›

Template Strings

SHARE

Template strings allow you to write strings that span multiple lines and include embedded expressions:

Example

Get your own React.js Server

Before:

```
const name = "John";
const age = 30;
const message = "Hello, " + name + "!\n" +
"You are " + age + " years old.";
```

Try it Yourself »

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
const name = "John";
const age = 30;
const message = `Hello, ${name}!
You are ${age} years old.`;
```

Try it Yourself »

Template strings use backticks (`) instead of quotes and can include:

- Multiple lines without \n
- Expressions inside ${}
- Quotes without escaping

Example

Multi-line Strings:

```
const html = `
  <div>
    <h1>Title</h1>
    <p>Paragraph</p>
  </div>
`;
```

Try it Yourself »

Note: The indentation in multi-line strings becomes part of the string.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
const x = `
  John:
    Hello, how are you?
  Jane:
    I'm fine, thanks!
`;
```

Try it Yourself »

REMOVE ADS

Expression Interpolation

You can include any valid JavaScript expression inside `${}` in a template string:

Example

Insert variables inside template strings:

```
let firstName = "John";
let lastName = "Doe";

let text = `Welcome ${firstName}, ${lastName}!`;
```

Try it Yourself »

```
let price = 10;
let quantity = 5;

let total = `Total: ${price * quantity}`;
```

Try it Yourself »

Example

Using the `map` function inside template strings:

```
const items = ["apple", "banana", "orange"];
const list = `You have ${items.length} items:
${items.map(item => `- ${item}`).join('\n')}`;
```

Try it Yourself »

Example

Using ternery operator inside template strings:

```
const isAdmin = true;
const message = `Status: ${isAdmin ? 'Admin' : 'User'}`;
```

Try it Yourself »

W3Schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Note: Tagged templates are an advanced feature. You might not need them in most cases.

The function takes the text and the expression(s) as arguments.

Look at the example below:

Example

Tagged Template:

```
function highlight(strings, fname) {
  let x = fname.toUpperCase();
  return strings[0] + x + strings[1];
}

let name = "John";

let text = highlight`Hello ${name}, how are you?`;
```

Try it Yourself »

Example Explained

The function name is `highlight`, you can name it whatever you want.

The first argument holds the text between the expressions, as an array.
The array items are splitted by the expression.
In this example `strings[0]` holds "Hello " and `strings[1]` holds " how are you?".

The second argument holds the expressions. In this example `fname` holds "John".

Note: If the template string contains multiple expressions, the text will still be held in the first argument, but the expressions will either be held in multiple arguments, or as an array in the second argument.

Example

Tagged Template with multiple expressions:

```
function highlight(strings, fname1, fname2) {
  let x = fname1.toUpperCase();
  let y = fname2.toUpperCase();
  return strings[0] + x + strings[1] + y + strings[2];
}

let name1 = "John";
let name2 = "Jane";

let text = highlight`Hello ${name1} and ${name2}, how are you?`;
```

Try it Yourself »

Example

Tagged Template with multiple expressions that are held in an array using the rest parameter:

```
function highlight(strings, ...fname) {
  let x = fname[0].toUpperCase();
  let y = fname[1].toUpperCase();
  return strings[0] + x + strings[1] + y + strings[2];
}
```

Try it Yourself »

❮ Previous

Sign in to track progress

Next ❯




Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play

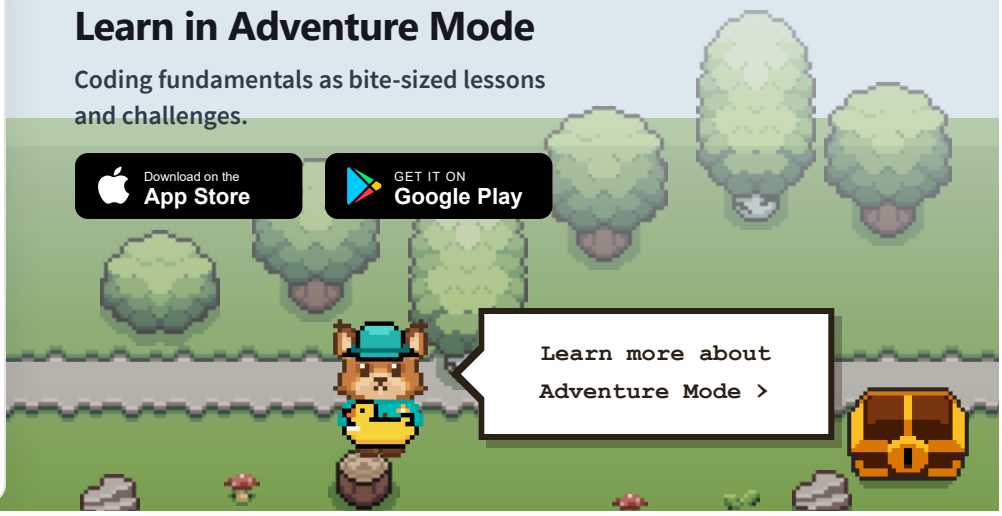

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.