Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React ES6 Variables

‹ Previous Next ›

Variables

SHARE

Before ES6 there was only one way of defining your variables: with the `var` keyword. If you did not define them, they would be assigned to the global object. Unless you were in strict mode, then you would get an error if your variables were undefined.

Now, with ES6, there are three ways of defining your variables: `var`, `let`, and `const`.

Example

Get your own React.js Server

var

```
var x = 5.6;
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

If you use `var` inside of a block, i.e. a for loop, the variable is still available outside of that block.

`var` has a *function* scope, not a *block* scope.

```
let x = 5.0;
```

`let` is the block scoped version of `var`, and is limited to the block (or expression) where it is defined.

If you use `let` inside of a block, i.e. a for loop, the variable is only available inside of that loop.

`let` has a *block* scope.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS
REMOVE ADS

Example

const

```
const x = 5.6;
```

`const` is a variable that once it has been created, its value can never change.

`const` has a *block* scope.

The keyword `const` is a bit misleading.

It does not define a constant value. It defines a constant reference to a value.

Because of this you can NOT:

- Reassign a constant value
- Reassign a constant array
- Reassign a constant object

But you CAN:

- Change the elements of constant array
- Change the properties of constant object

W3Schools
Tutorials
Exercises
W3Schools app
iOS & Android
NEW
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

‹ Previous
Sign in to track progress
Next ›

Learn it.
Get certified.
$95 per course
one-time payment
Exam and certificate included.
Get started
REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS



Mint Mobile Black Friday Sale

SPONSORED BY MINTMOBILE.COM

Learn More

W3Schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

Learn more about Adventure Mode >

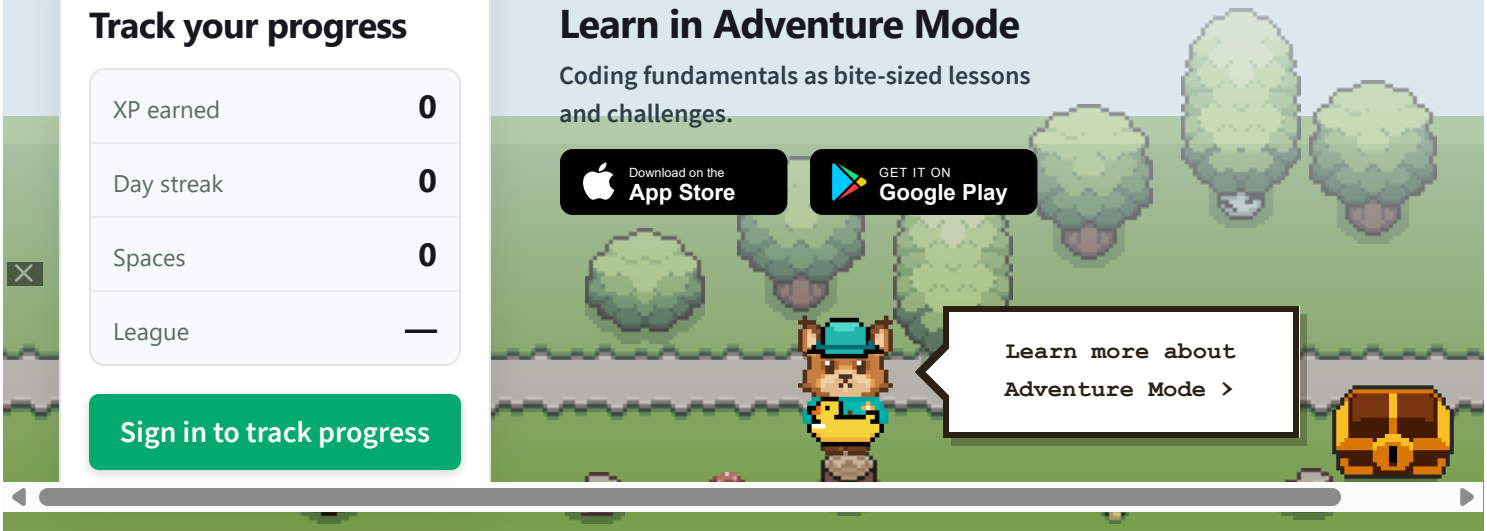

PLUS SPACES

GET CERTIFIED FOR TEACHERS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.