W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React Forms - Checkbox

‹ Previous
Next ›

Checkbox

SHARE

For checkboxes, use the `checked` attribute instead of `value` to control its state.

We'll use the `useState` Hook to manage the value of the textarea:

In the `handleChange` function, use the `e.target.type` property check if the current input is a checkbox or not.

Example:

Get your own React.js Server

React uses the `checked` attribute to control the checkbox:

```
import { useState } from 'react';
import { createRoot } from 'react-dom/client';

function MyForm() {
```

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
    const value = target.type === 'checkbox' ? target.checked : target.valu
    const name = target.name;
    setInputs(values => ({...values, [name]: value}))
  }

  const handleSubmit = (event) => {
    let fillings = '';
    if (inputs.tomato) fillings += 'tomato';
    if (inputs.onion) {
      if (inputs.tomato) fillings += ' and ';
      fillings += 'onion';
    }
    if (fillings == '') fillings = 'no fillings';
    alert(`${inputs.firstname} wants a burger with ${fillings}`);
    event.preventDefault();
  };

  return (
    <form onSubmit={handleSubmit}>
      <label>My name is:
      <input
        type="text"
        name="firstname"
        value={inputs.firstname}
        onChange={handleChange}
      />
      </label>

      <p>I want a burger with:</p>
      <label>Tomato:
      <input
        type="checkbox"
        name="tomato"
        checked={inputs.tomato}
        onChange={handleChange}
      />
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
            name="onion"
            checked={inputs.onion}
            onChange={handleChange}
          />
        </label>
        <button type="submit">Submit</button>
      </form>
    )
}

createRoot(document.getElementById('root')).render(
  <MyForm />
);
```

Run Example »

REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

the `useState` object:

Example:

Use initial values for the input fields:

```
function MyForm() {
  const [inputs, setInputs] = useState({
    firstname: 'John',
    tomato: true,
    onion: false
  });

  ...
```


Run Example »

‹ Previous Sign in to track progress Next ›



REMOVE ADS


Python - Variable Names - W3Schools.com

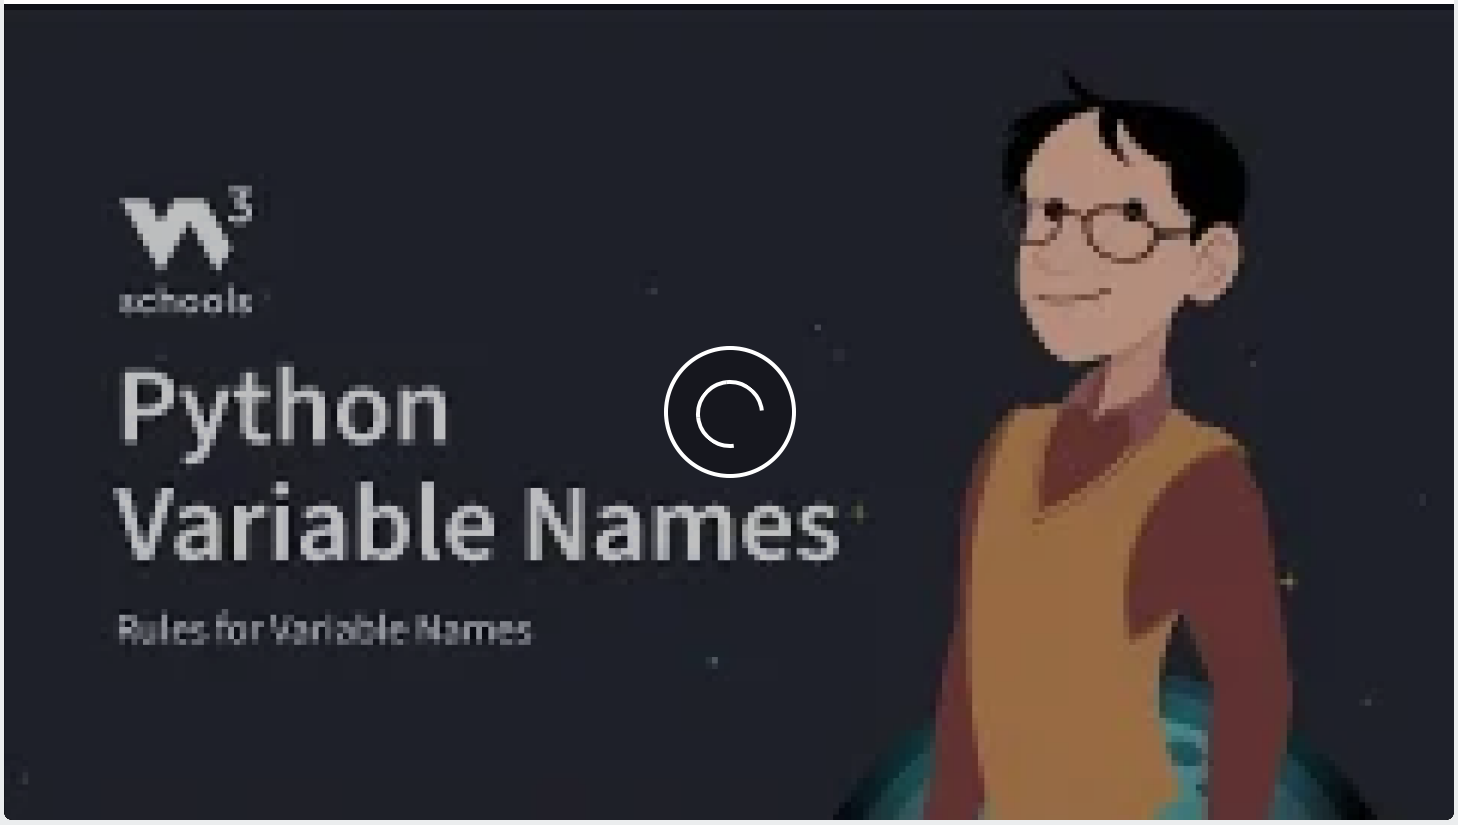

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >

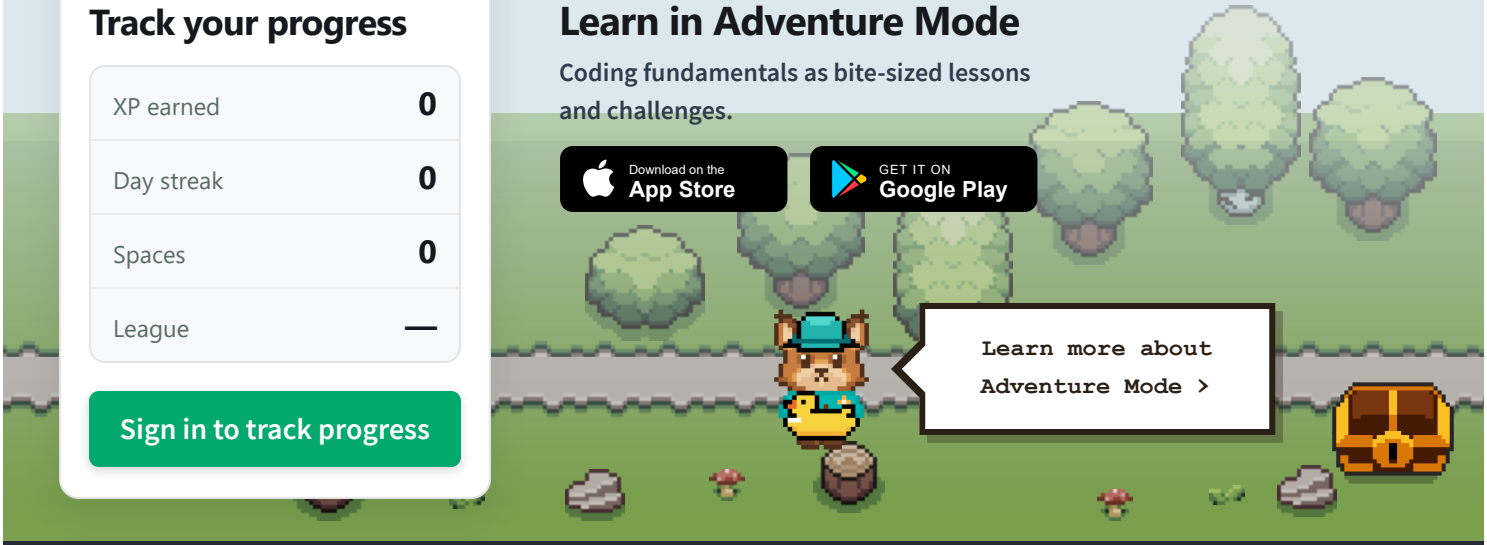

PLUS SPACES

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.