Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React JSX Attributes

‹ Previous Next ›

JSX allows you to insert attributes into HTML elements, but there are a few important differences.

class = className

SHARE

The `class` attribute is a much used attribute in HTML, but since JSX is rendered as JavaScript, and the `class` keyword is a reserved word in JavaScript, you are not allowed to use it in JSX.

JSX solved this by using `className` instead. When JSX is rendered, it translates `className` attributes into `class` attributes.

Example

Get your own React.js Server

Use attribute `className` instead of `class` in JSX:

```
  );
}
```

Run Example »

Expressions as Attr

Ad



You can also use JavaScript expressior This is very useful for dynamic attributes.

Example

Use JavaScript expressions as attribute values:

```
function Car() {
  const x = "myclass";
  return (
    <h1 className={x}>Hello World</h1>
  );
}
```

Run Example »

Note that the attribute value is not wrapped in quotes, this is important when using expressions (JavaScript variables) as attribute values. If you use quotes, JSX will treat it as a string literals and not a JavaScript expression.

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

camelCase Event Attributes

Event attributes in JSX are written in camelCase.

Example

Use camelCase for event attributes:

```
function Car() {
  const myfunc = () => {
    alert('Hello World');
  };
  return (
    <button onClick={myfunc}>Click me</button>
  );
}
```

Run Example »

Boolean Attributes

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

Boolean true in JSX, this will make the button disabled:

```
<button onClick={myfunc} disabled>Click me</button>
```

Run Example »

Example

Also true in JSX, this will also make the button disabled:

```
<button onClick={myfunc} disabled={true}>Click me</button>
```

Run Example »

Example

False in JSX, this will NOT make the button disabled:

```
<button onClick={myfunc} disabled={false}>Click me</button>
```

Run Example »

W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

The style Attribute

The style attribute in JSX only accepts a JavaScript object with camelCased CSS property names, rather than a CSS string (as in HTML).

Example

Use the `style` attribute:

```
function Car() {
  const mystyles = {
    color: "red",
    fontSize: "20px",
    backgroundColor: "lightyellow",
  };

  return (
    <>
      <h1 style={mystyles}>My car</h1>
    </>
  );
}
```

Run Example »

W3Schools Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

This is an important difference between HTML and JSX.

You will learn more about CSS and styling in the React CSS Styling chapter.


Previous
Sign in to track progress
Next

Get Certified in React
Boost your career with an official certification
$95
Get certified

REMOVE ADS

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

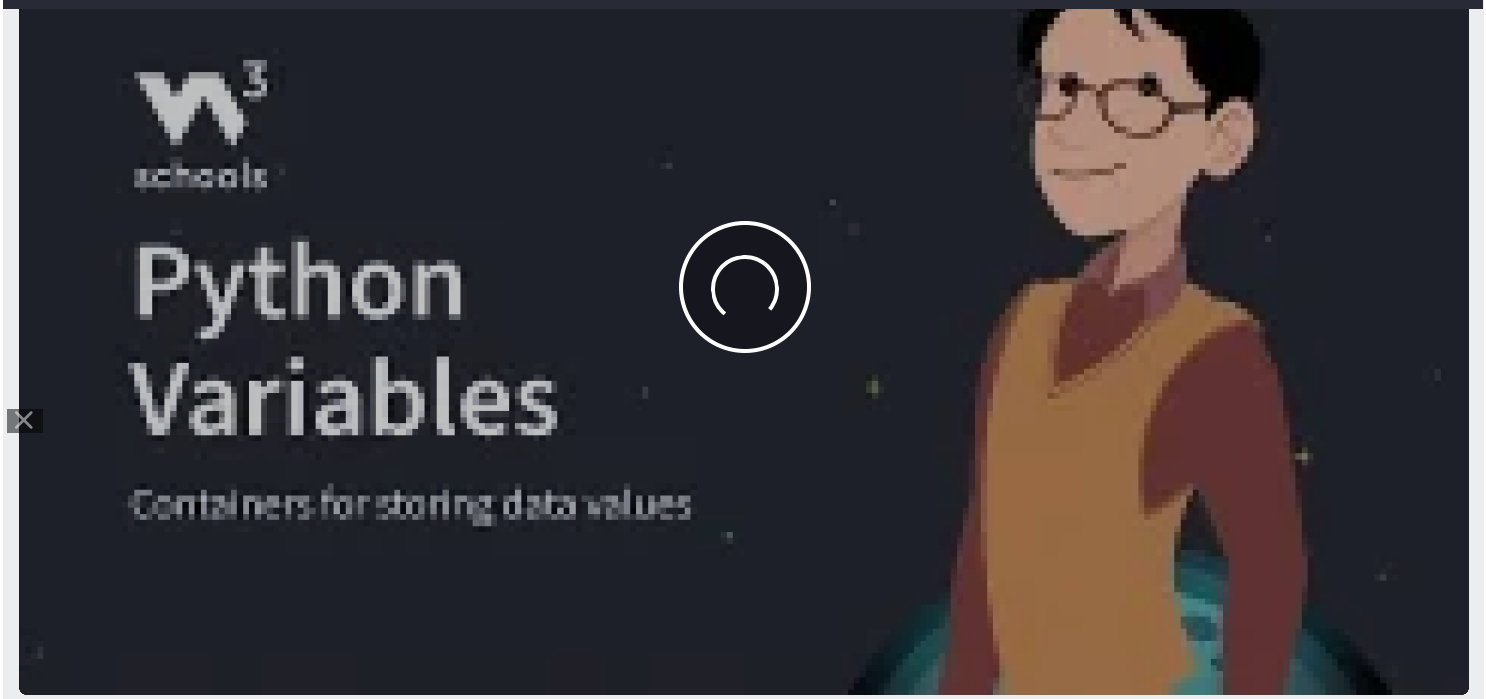

Tutorials Exercises

W3Schools app NEW
iOS & Android

Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

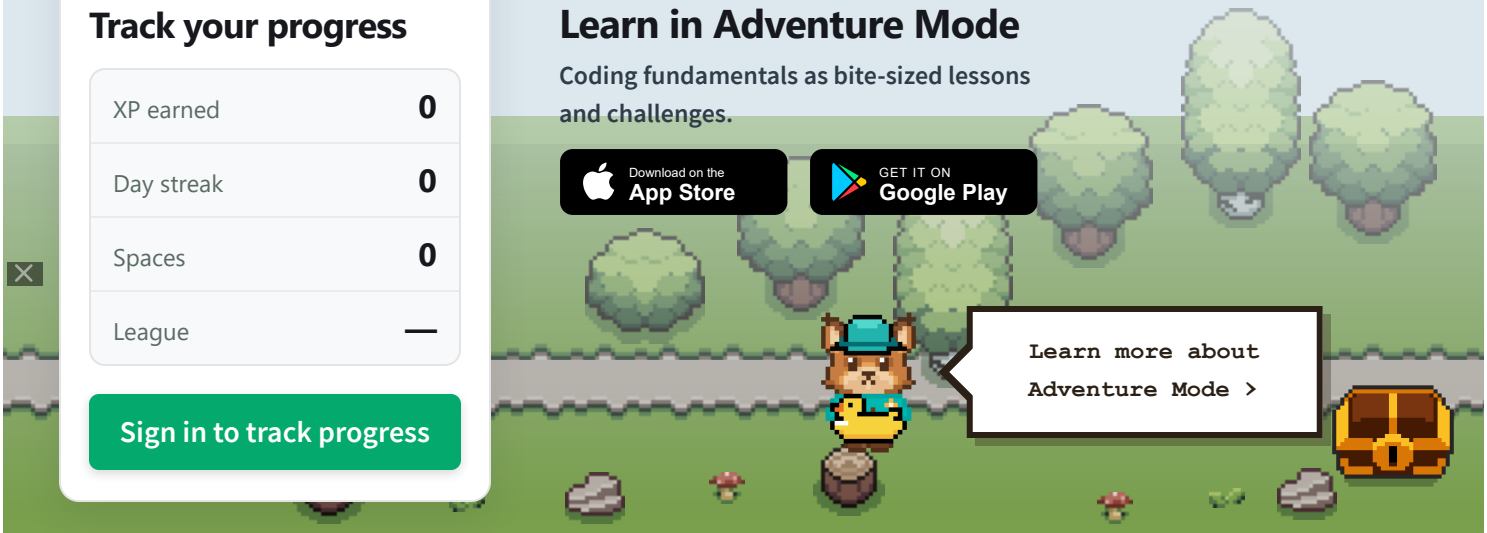

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.