W3Schools app NEW iOS & Android
Sign In
Tutorials Exercises
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

React Props

‹ Previous
Next ›

Props are arguments passed into React components.

Props are passed to components via HTML attributes.

`props` stands for properties.

React Props

SHARE

React Props are like function arguments in JavaScript *and* attributes in HTML.

To send props into a component, use the same syntax as HTML attributes:

Example

Get your own React.js Server

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
  <Car brand="Ford" />
);
```

The component receives the argument as a `props` object:

Example

Use the `brand` attribute in the `Car` component:

```
function Car(props) {
  return (
    <h2>I am a {props.brand}!</h2>
  );
}
```

Run Example »

The name of the object is `props`, but you can call it anything you want.

Example

You can use `myobj` instead of `props` in the component:

```
function Car(myobj) {
  return (
    <h2>I am a {myobj.brand}!</h2>
  );
}
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

REMOVE ADS

Pass Multiple Properties

You can send as many properties as you want.

Every attribute is sent to the `Car` component as object properties.

Example

Send multiple properties to the `Car` component:

```
createRoot(document.getElementById('root')).render(
  <Car brand="Ford" model="Mustang" color="red" />
);
```

All properties are received in the `Car` component inside the `props` object:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
function Car(props) {
  return (
    <h2>I am a {props.color} {props.brand} {props.model}!</h2>
  );
}
```

Run Example »

Different Data Types

React props can be of any data type, including variables, numbers, strings, objects, arrays, and more.

Strings can be sent inside quotes as in the examples above, but numbers, variables, and objects need to be sent inside curly brackets.

Example

Numbers has to be sent inside curly brackets to be treated as numbers:

```
createRoot(document.getElementById('root')).render(
  <Car year={1969} />
);
```

Run Example »

Example

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
createRoot(document.getElementById('root')).render(
  <Car brand={x} />
);
```

Run Example »

Example

Objects and Arrays has to be sent inside curly brackets:

```
let x = [1964, 1965, 1966];
let y = {name: "Ford", model: "Mustang"};

createRoot(document.getElementById('root')).render(
  <Car years={x} carinfo={y} />
);
```

Run Example »

Object Props

The component treats objects like objects, and you can use the dot notation to access the properties.

Example

Use the dot notation to access object properties:

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
      <h2>My {props.carinfo.name} {props.carinfo.model}!</h2>
      <p>It is {props.carinfo.color} and it is from {props.carinfo.year}!</
    </>
  );
}

const carInfo = {
  name: "Ford",
  model: "Mustang",
  color: "red",
  year: 1969
};

createRoot(document.getElementById('root')).render(
  <Car carinfo={carInfo} />
);
```

Run Example »

REMOVE ADS

schools Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

Example

Use the indexes to access array properties:

```
function Car(props) {
  return (
    <h2>My car is a {props.carinfo[0]} {props.carinfo[1]}!</h2>
  );
}

const carInfo = ["Ford", "Mustang"];

createRoot(document.getElementById('root')).render(
  <Car carinfo={carInfo} />
);
```

Run Example »

Pass Props from Component to Component

Attributes are also how you pass data from one component to another, as parameters.

Example

Send the `brand` attribute from the `Garage` component to the `Car` component:

```
function Car(props) {
  return (
    <h2>I am a {props.brand}!</h2>
```

Tutorials Exercises W3Schools app iOS & Android NEW Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

```
  return (
    <>
      <h1>Who lives in my garage?</h1>
      <Car brand="Ford" />
    </>
  );
}

createRoot(document.getElementById('root')).render(
  <Garage />
);
```

Run Example »

Note: React Props are read-only! You will get an error if you try to change their value.

‹ Previous Sign in to track progress Next ›


Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS


Python - Get Started - W3Schools.com

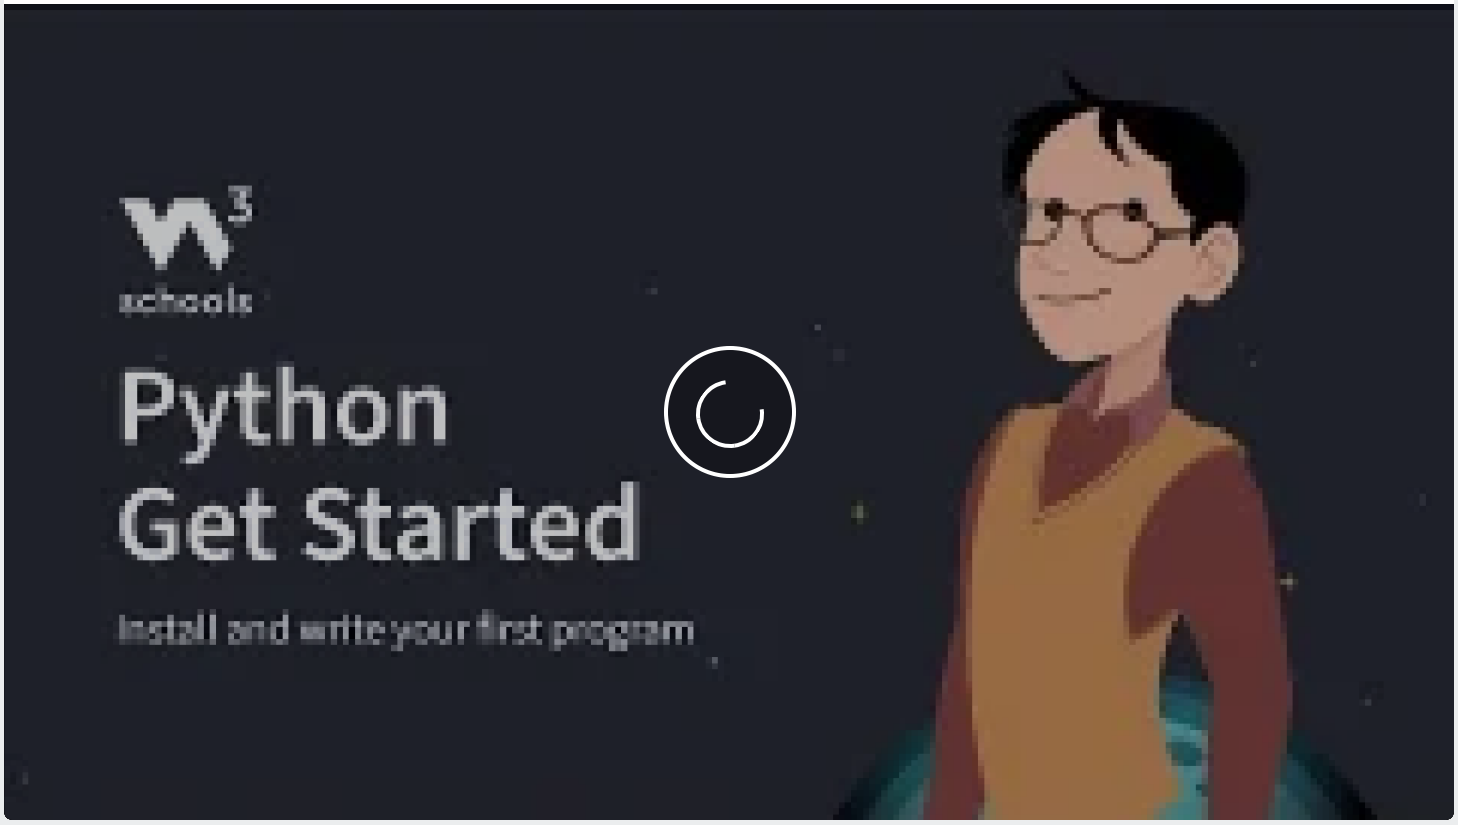

Tutorials Exercises
W3Schools app NEW iOS & Android
Sign In
. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
Learn more about Adventure Mode >

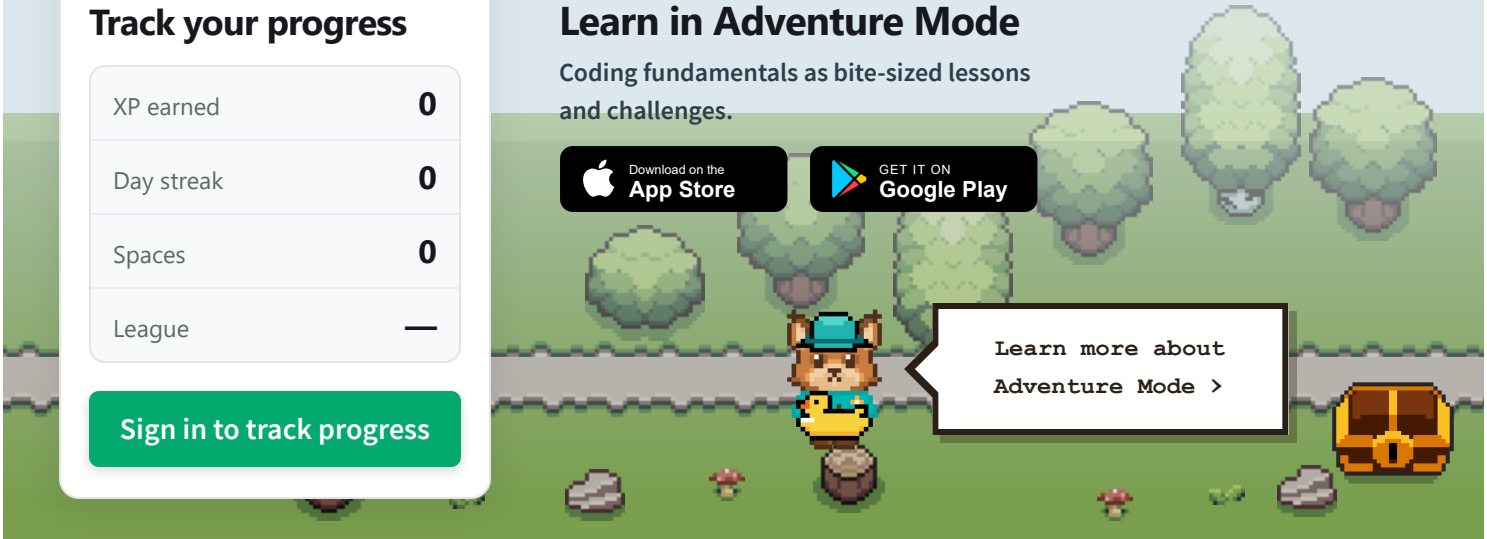

PLUS SPACES

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

PRACTICE CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

Tutorials Exercises W3Schools app iOS & Android NEW Sign In

. CSS JAVASCRIPT SQL PYTHON JAVA PHP C C++ C# AWS

correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.