Class Dependency Analyzer

Developer Guide

V1.2

Table of Contents

1.Introduction	3
2.Extension Mechanism.	3
2.1.Prerequisites	3
2.2.Implementation.	
2.3.Plug-in Declaration	3
2.4.Deployment.	4
3. Extension Points.	4
3.1.org.pf.tools.cda.ui.plugin.export.spi.AModelExporterUIPlugin	4
3.2.org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin	6
4.Programmatic Analysis	7
1.1 Required Libraries.	7
1.2 Domain Model	7
1.2.1 Workset	8
1.2.2 GenericClassContainer / ClassContainer	
1.2.3 ClassPackage	9
1.2.4 ClassInformation	
1.3 Using CDA Base and Core classes	9
1.3.1 Phase 1 – Workset Creation	9
1.3.2 Phase 2 – Workset Initialization	10
1.3.3 Phase 3 - Analyzing	10
1.3.4 Example Code	11

1. Introduction

This guide is supposed to provide information for developers that intend to write their own extensions to enhance the Class Dependency Analyzer or those who just want to use the core functionality of CDA – without GUI – in their own projects.

The motivation to do this can be

- adding own analysis ideas
- providing new graphical features to visualize dependency information
- exporting the data model to file or database

Chapter 2 of this document provides a general description of the extension mechanism supported by CDA and chapter 3 explains all available extension points in detail. In chapter 4 the focus is on the CDA core functionality and the relevant API to utilize it in other contexts.

2. Extension Mechanism

This chapter gives an overview of the extension mechanism supported by CDA and describes the prerequisites to consider when implementing a plug-in.

2.1. Prerequisites

The current CDA version (1.14.0 or higher) is built with Java 6 and requires a Java 6 JVM to execute.

Use **JDK 1.6** or higher for plug-in implementation.

For plug-in implementation the following JAR files from CDA must be in the compile classpath:

- pf-odem.jar
- pf-cda-xpi.jar
- pf-cda-swing-xpi.jar
- pf.jar (optionally)

2.2. Implementation

All extension-points are defined either as an *interface* or an *abstract class*. To provide a plug-in for a particular extension-point it is usually sufficient to just implement the interface or extend the abstract class and implement the required methods.

See the Javadoc provided with CDA for an accurate API description.

2.3. Plug-in Declaration

To introduce a plug-in to CDA it must be declared in a special plug-in specification file (e.g. "*ui.plugins*") which must be located in the sub-folder **META-INF**.

The extension mechanism of CDA collects all such plug-in specification files on the classpath and automatically loads the declared plug-in classes declared in them. The file itself contains key/value pairs like properties files. The key is an arbitrary (unique) identifier for the particular plug-in implementation and the value is the full qualified class name. Optionally the class name can be prefixed by options which are

enclosed by square brackets -> [options]. Currently only the following option is supported

1 Defines that the plug-in should be loaded as singleton. That is, only one instance is created and reused whenever the plug-in gets invoked.

Example 1:

```
exportXML=[1]org.pf.tools.cda.ext.export.xml.ui.XmlFileModelExporterUIPlugin
```

If a plug-in should get some initialization parameters it is possible to specify those in the same line separated by semicolon (';'). Each key/value pair must be separated by a semicolon from the next setting.

Example 2:

```
custom1=org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin;width=800;height=400
```

To receive such initialization parameters, the plug-in class must implement the interface org.pf.plugin.InitializablePlugin which requires to add *pf.jar* to the classpath. The parameters will then be given as <code>java.util.Properties</code> object to the

```
public void initPlugin(String id, Properties properties)
```

method of the plug-in.

2.4. Deployment

In order to make a plug-in implementation available to CDA it must be packaged with all its classes and the metadata *META-INF/ui.plugins* file into a JAR file.

That JAR has to be copied to the *lib/ext* sub-folder under \$CDA HOME.

With the next start of CDA the plug-in will be found automatically and loaded when required.

3. Extension Points

This chapter is a reference of all currently supported extension points. It describes which classes have to be extended and what implementation details have to be considered.

Since CDA version 1.9 the following extension points are supported:

- org.pf.tools.cda.ui.plugin.export.spi.AModelExporterUIPlugin Allows to provide export capabilities for the data model shown in the tree view.
- org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin Allows to provide own functionality executed on a selected element in the tree view.


These extension points are further explained in the following sub-sections.

3.1. org.pf.tools.cda.ui.plugin.export.spi.AModelExporterUIPlugin

The purpose of this extension-point is to allow custom export routines to be plugged-in. The export will be executed starting on a selected element (i.e. workset, container, package, class) in CDA's tree view. Therefore the plug-in code will be added as a menu-item to the pop-up menus of all elements in the tree view. If the menu Item gets selected the export will be started on the current element.

This is a multi-plug-in extension-point, which means that multiple coexisting implementations are supported.

Below you can see a sample screenshot of the menu item for the XML file export plug-in.

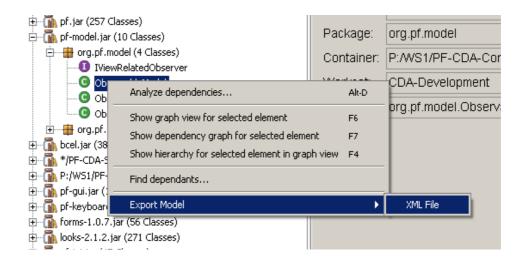

For an implementation of this extension-point follow the steps below:

- Create a subclass of org.pf.tools.cda.ui.plugin.export.spi.AModelExporterUIPlugin
- 2. Optionally implement

 $\begin{tabular}{ll} \textbf{interface} & \verb|gradies| and \verb|scales| and and another and another and another anot$

- 3. Implement method
 public String getActionText(Locale locale, IExplorationModelObject object)
 It must return a non-null value for all given objects for that it supports an export. That means,
 whenever this method returns null, no menu item is shown in the selected element's pop-up menu
 for this plug-in.
- 4. Create a subclass of org.pf.tools.cda.plugin.export.spi.AModelExporter and override the startXXX() and finishXXX() methods as appropriate.
- 5. In your subclass of AModelExporterUIPlugin (from step 1) implement abstract method public AModelExporter createExporter (PluginConfiguration config) which basically should return a new instance of your AModelExporter subclass (from step 4).

That's it.

Don't forget to add the plug-in declaration to the *ui.plugins* file in the META-INF sub-directory of your plug-in JAR file. It is recommended to define the [1] option to specify that the plug-in is treated as a singleton.

A sample plug-in bundling for this extension-point can be found in the *pf-cda-extensions.jar* which is part of CDA.

Summary:

org.pf.tools.cda.ui.plugin.export.spi.AModelExporterUIPlugin		
UI plug-in	yes	
Multi plug-in extension-point	yes	
Singleton	yes	

3.2. org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin

This is a very general extension-point. It allows to plug-in any custom code to work on the currently selected element in the tree view. Each plug-in provided for this extension-point will create an additional menu-item in the pop-up menus of the elements in the tree view. For which type of element the menu-item will be shown is controlled by the plug-in's method

```
public String getActionText(Locale locale, IExplorationModelObject object)
```

from interface <code>IPluginActionInfo</code>. If the method returns a string this string will be used as the menu-item's label. If the method returns null, no menu-item will be shown. All other methods from interface <code>IPluginActionInfo</code> have a default implementation in the plug-in's superclasses.

If the menu-item gets selected a new window will be opened. Therefore the plug-in must provide a java.awt.Frame. The contents of that frame is completely the responsibility of the plug-in.

The CDA plug-in framework takes care that the new window is handled like all other windows of the application. For closing by a button or menu-item just call method close() which is implemented in the superclass.

So creating a plug-in for this extension-point is very simple:

- Create a subclass of org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin and implement the methods getPluginProvider(), getPluginVersion() of interface org.pf.tools.cda.xpi.IPluginInfo
- 2. Implement method

 public String getActionText(Locale locale, IExplorationModelObject object)

 It must return a non-null value for all given objects for that it supports an export. That means, whenever this method returns null, no menu item is shown in the selected element's pop-up menu for this plug-in.
- 3. Implement method
 public Frame createFrame(IExplorationModelObject object)
 This method is required to create the frame to be shown as separate new window.

Finally bundle all necessary classes together with your META-INF/ui.plugins into a JAR file.

Summary:

org.pf.tools.cda.ui.plugin.spi.ASubWindowPlugin		
UI plug-in	yes	
Multi plug-in extension-point	yes	
Singleton	no	

Example:

There is an example plug-in for this extension-point coming with CDA. It is in the sub-folder *samples*. To activate the sample, just copy *plugin-sample1.jar* to the \$CDA HOME/lib/ext folder and re-start CDA.

4. Programmatic Analysis

Sometimes people do not want to use the GUI of CDA. Instead they are interested in utilizing the core functionality of analyzing class dependencies in their own software. Therefore this section provides information about the CDA domain model and the basic knowledge of how to use it in your own software.

For details please refer to the API Javadoc, bundled with the CDA download.



Be aware that there is no guarantee that the API stays stable or backward compatible in any way in future releases of CDA!

1.1 Required Libraries

To do programmatic analyzing the following JARs must be in the classpath:

- pf-application.jar
- pf-bcel.jar
- > pf-odem.jar
- > pf-model.jar
- pf-cda-base-xpi.jar
- > pf-cda-base.jar
- > pf-cda-core.jar
- > pf-bif.jar
- > pf-file.jar
- pf-logging.jar
- pf-nls.jar
- pf-pax.jar
- > pf-plugin.jar
- > pf-reflect.jar
- > pf-security.jar
- > pf-settings.jar
- > pf-six.jar
- > pf-text.jar
- > pf-textx.jar
- pf-utilities.jar

The classes in the files from pf-bif.jar to pf-utilities.jar are all combined available in single file **pf.jar** that can be downloaded from http://www.programmers-friend.org/download/ (all V5.x.x versions are compatible).


1.2 Domain Model

The model classes of CDA are in pf-cda-base.jar in package org.pf.tools.cda.model.base.

The most important model classes are:

- Workset
- ClassContainer
- > ClassPackage
- ClassInformation

They are all subclasses of the abstract class *AanalyzableElement*. See the class diagram below for an overview. A short description for these model classes can be found in the next sub-sections.

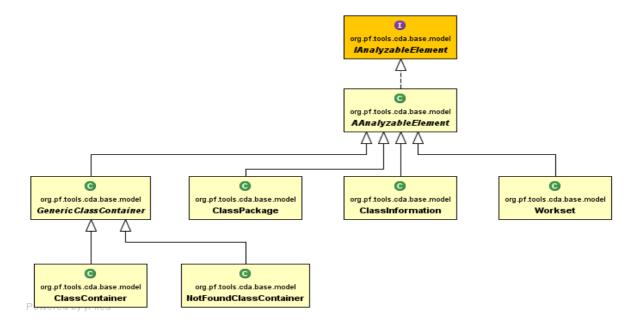

1.2.1 Workset

The purpose of a *Workset* is mainly to define the set of class files to be analyzed (similar to a classpath). It supports various types for specifying such files:

- > Folder
 All files matching pattern "*.class" in that folder and sub-folders will be included
- > Java Archive (JAR)
 All files matching pattern "*.class" in such a zipped archive will be included
- Eclipse .classpath File All classes defined by this Eclipse specific classpath definition will be included. Attention: Since the format has changed with different Eclipse version this mechanism might not always work properly!

1.2.2 Generic Class Container / Class Container

As the name already indicates, these objects contain the classes. Actually they are not directly containing the classes, but the packages in which then the classes are. This model classes provide methods to find contained classes or packages. The also can simply be asked to which other containers the have dependencies:

```
GenericClassContainer[] containers = container.getDirectReferredContainers();
```

1.2.3 ClassPackage

Each loaded package is represented by an instance of this class. The separation of packages and classes allows dependency analysis on different levels. Most other tools can only provide information on class level. With CDA it is possible for example to get all classes a package depends on. The packages a package depends on can be determined by

```
ClassPackage[] packages = pack.getDirectReferredPackages();
```

1.2.4 ClassInformation

All interfaces, classes, enums and annotations are held as instances of *ClassInformation*. The rich API provides a lot of information about the types themselves and about their dependencies. Some useful methods (see Javadoc for more):

```
public boolean isInterface()
public boolean isEnum()
public boolean isAnnotation()
public boolean isClass()
public boolean isDirectExtensionOf(ClassInformation classInfo)
public boolean isSubclassOf(ClassInformation otherClass)
public ClassInformation[] getReferredClassesArray()
public ClassFileVersion getClassFileVersion()
public boolean refersTo(IAnalyzableElement analyzableElement)
```

1.3 Using CDA Base and Core classes

The general way to work with CDA can be separated into the following phases:

- 1. Create a Workset object initialized with the desired classpath definition
- 2. Run the initialization, scanning and pre-analyzation on the Workset
- 3. Execute a *Processor* over all or a subset of containers, packages or classes that collects elements that match specific criteria

1.3.1 Phase 1 – Workset Creation

A Workset instance can be created with a few lines of code. Have a look at the following example:

```
Workset workset = new Workset("Sample1");
ClasspathPartDefinition partDefinition = new ClasspathPartDefinition("example-libs/*.jar");
workset.addClasspathPartDefinition(partDefinition);
return workset;
```

You can add as many ClasspathPartDefinition objects as you like.

An alternative to create a Workset is using the

```
org.pf.tools.cda.core.io.workset.WorksetReader
```

It can read workset files (*.ws) created via the (GUI based) CDA tool or with the class

```
org.pf.tools.cda.core.io.workset.WorksetWriter
```

Example:

```
workset = WorksetReader.readWorkset("my-worksets/sample1.ws");
```

1.3.2 Phase 2 - Workset Initialization

The easiest way to load and analyze the classes specified by a Workset is to use the

```
org.pf.tools.cda.core.init.WorksetInitializer
```

Example:

```
WorksetInitializer wsInitializer = new WorksetInitializer(workset);
wsInitializer.initializeWorksetAndWait(null);
```

Instead of null an implementor of interface org.pf.tools.cda.core.processing.IProgressMonitor can be defined to follow the (sometimes lengthy) process of loading and analyzing all classes.

Eventually, after the initialization all classes and their resolved dependencies are in-memory (so ensure to provide enough heap space).

1.3.3 Phase 3 - Analyzing

The last phase is about getting the specific information of interest from the loaded and resolved classes.

Getting a single class is as simple as

```
ClassInformation classInfo = workset.getClassInfo("org.pf.tools.cda.base.Module");
```

To get the classes (interfaces, enums and annotations) a class depends on just use

```
ClassInformation[] classes = classInfo.getReferredClassesArray();
```

It is also possible to get all packages the class depends on:

```
ClassPackage[] packages = classInfo.getDirectReferredPackages()
```

More complex or special analysis tasks will be executed with processor objects and corresponding methods in the model classes that follow the *visitor* design pattern.

The general approach is the execution of one of the following methods:

- processClassContainersObjects(Collection, IclassContainerProcessor)
- processClassPackageObjects(Collection, IClassPackageProcessor)
- processClassInformationObjects(Collection, IClassInformationProcessor)

Each is for a different type of domain model class. An each requires a type specific processor as parameter. The processor is an object that will be called for each element of the relevant type.

For ready to use implementations of the processor interfaces have a look into the packages

```
org.pf.tools.cda.base.model.processing
org.pf.tools.cda.core.dependency.analyzer
```

All those processor interfaces are derived from

```
org.pf.tools.cda.base.model.processing.IAnalyzableElementProcessor<TAnalyzableElement>
```

So they all can be used in two ways

- 1. As filter that is the matches() method of the processor decides whether or not an element is relevant for the current processing.
- 2. As actor on the elements that is each element can be manipulated, collected, counted or what ever necessary.

All the processClassxxxObjects (collection, processor) methods are working in the following way:

- 1. The process is used for each element of the relevant type (as part of the method name).
- 2. First the process (element) method of the processor gets called.
- 3. It can do whatever it likes with the given element.
- 4. If it returns *false* the processing ends immediately no further elements are processed.
- 5. If it returns *true* and a collection object (not null) was provided then the matches (element) method gets called.
- 6. This method should not do anything with the given element. It simply should decide whether or not the element matches the criteria of the processor.
- 7. If matches (element) returns true the element will be added to the collection.

One example for a class processor is

```
org.pf.tools.cda.core.dependency.analyzer.MainClassDetector<TResultData>
```

Its purpose is finding all classes that implement a static main() method. Its process() method just always returns *true*. Its matches() method only returns true for classes that have a main() method.

1.3.4 Example Code

Along with CDA there is a zip file that contains an Eclipse project with example code for some variants of programmatic CDA usage. Have a look at the download page.