

Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

Name - Polomi Adak

Roll no - 20

Experiment: 06

Aim: To study Detecting and Recognizing Faces

Objective: To Conceptualize Haar Cascades Getting Haar cascade data. Using Opency to Perform face detections performing face detection on still images.

Theory:

1. Conceptualizing Haar Cascades:

Conceptualizing Haar Cascades refers to a method of object detection that uses a cascade of simple Haar-like features to efficiently identify objects within images or video streams. These cascades are trained on positive and negative samples to distinguish between the object of interest and background, making them suitable for real-time applications such as face detection in cameras and security systems. Haar Cascades are known for their speed and accuracy, making them a popular choice in the field of computer vision.

2. Getting Haar Cascade Data:

Getting Haar Cascade data involves obtaining pre-trained Haar Cascade classifiers, which are used for object detection. These classifiers are based on Haar-like features and can recognize specific objects or patterns. To obtain Haar Cascade data, you typically download or create these classifiers and then use them with a computer vision library like OpenCV for tasks such as face detection or object recognition.

3. Using OpenCV to perform Face Detection:

Using OpenCV for face detection involves utilizing the OpenCV library's pre-trained deep learning models, such as Haar cascades or deep neural networks like Single Shot MultiBox Detector (SSD) or Faster R-CNN, to identify and locate faces within images or video streams. OpenCV provides a convenient and efficient framework to apply these models, making it a popular choice for various face detection applications, including facial recognition, emotion analysis, and more.

4. Performing Face detection on a still image:

Performing face detection on a still image is a computer vision technique that involves identifying and locating human faces within the image. This process typically employs algorithms and models to detect facial features like eyes, nose, and mouth, and it is a fundamental step in applications such as facial recognition, emotion analysis, and image indexing. The output of face detection is usually a bounding box or a list of coordinates that delineate the detected faces within the image, enabling further analysis or manipulation.

Introduction

Discover object detection with the Haar Cascade algorithm using OpenCV. Learn how to employ this classic method for detecting objects in images and videos. Explore the underlying principles, step-by-step implementation, and real-world applications. From facial recognition to vehicle detection, grasp the essence of Haar Cascade and OpenCV's role in revolutionizing computer vision. Whether you're a novice or an expert, this article will equip you with the skills to harness the potential of object detection in your projects.

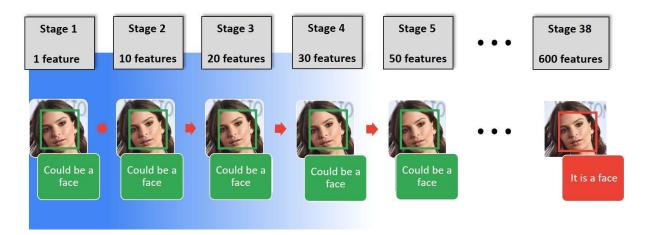


Table of contents:

Why Use Haar Cascade Algorithm for Object Detection?


Identifying a custom object in an image is known as object detection. This task can be done using several techniques, but we will use the haar cascade, the simplest method to perform object detection in this article.

What is Haar Cascade Algorithm?

Haar cascade is an algorithm that can detect objects in images, irrespective of their scale in image and location.

This algorithm is not so complex and can run in real-time. We can train a haar-cascade detector to detect various objects like cars, bikes, buildings, fruits, etc.

Haar cascade uses the cascading window, and it tries to compute features in every window and classify whether it could be an object.

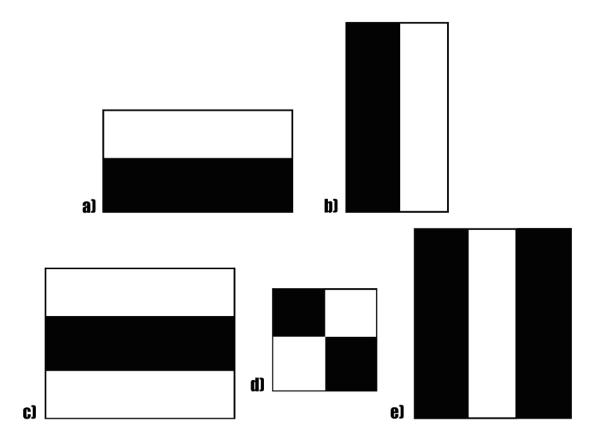

Haar cascade works as a classifier. It classifies positive data points \rightarrow that are part of our detected object and negative data points \rightarrow that don't contain our object.

- Haar cascades are fast and can work well in real-time.
- Haar cascade is not as accurate as modern object detection techniques are.
- Haar cascade has a downside. It predicts many false positives.
- Simple to implement, less computing power required.


Code and Output:

```
pip install opency-python
import cv2
imagePath = 'face.jpg'
img = cv2.imread(imagePath)
img.shape
->(275, 183, 3)
gray image = cv2.cvtColor(img, cv2.COLOR BGR2GRAY)
gray_image.shape
->(275, 183)
face classifier = cv2.CascadeClassifier(
  cv2.data.haarcascades + "haarcascade frontalface default.xml"
)
face = face classifier.detectMultiScale(
  gray image, scaleFactor=1.1, minNeighbors=5, minSize=(40, 40)
)
for (x, y, w, h) in face:
  cv2.rectangle(img, (x, y), (x + w, y + h), (0, 255, 0), 4)
img\_rgb = cv2.cvtColor(img, cv2.COLOR\_BGR2RGB) \setminus
import matplotlib.pyplot as plt
plt.figure(figsize=(20,10))
plt.imshow(img_rgb)
plt.axis('off')
```

Input:



Output:



Conclusion:

The process of performing face detection on still images involves conceptualizing Haar cascades, which are trained data structures designed for object detection, with a focus on recognizing faces. Obtaining Haar cascade data involves collecting a dataset of positive and negative samples, training the cascade classifier, and fine-tuning it for specific detection tasks. OpenCV, a widely-used computer vision library, provides robust tools and libraries for implementing Haar cascade-based face detection, simplifying the development process. This approach enables precise and efficient identification of faces within images, making it a crucial technique for various applications like biometrics, security, and image analysis.