

Application Administration
Guide



SAP GUI Administration

Release 7.50



SAP AG
Neurottstraße 16
69190 Walldorf
Germany
T +49/18 05/34 34 24
F +49/18 05/34 34 20
www.sap.com

© Copyright 2017 SAP AG. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of SAP AG. The information contained herein may be changed without prior notice.

Some software products marketed by SAP AG and its distributors contain proprietary software components of other software vendors.

Microsoft, Windows, Outlook, and PowerPoint are registered trademarks of Microsoft Corporation.

IBM, DB2, DB2 Universal Database, OS/2, Parallel Sysplex, MVS/ESA, AIX, S/390, AS/400, OS/390, OS/400, iSeries, pSeries, xSeries, zSeries, z/OS, AFP, Intelligent Miner, WebSphere, Netfinity, Tivoli, and Informix are trademarks or registered trademarks of IBM Corporation in the United States and/or other countries.

Oracle is a registered trademark of Oracle Corporation.

UNIX, X/Open, OSF/1, and Motif are registered trademarks of the Open Group.

Citrix, ICA, Program Neighborhood, MetaFrame, WinFrame, VideoFrame, and MultiWin are trademarks or registered trademarks of Citrix Systems, Inc.

HTML, XML, XHTML and W3C are trademarks or registered trademarks of W3C®, World Wide Web Consortium, Massachusetts Institute of Technology.

Java is a registered trademark of Sun Microsystems, Inc.

JavaScript is a registered trademark of Sun Microsystems, Inc., used under license for technology invented and implemented by Netscape.

MaxDB is a trademark of MySQL AB, Sweden.

SAP, R/3, mySAP, mySAP.com, xApps, xApp, SAP NetWeaver, and other SAP products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of SAP AG in Germany and in several other countries all over the world. All other product and service names mentioned are the trademarks of their respective companies. Data contained in this document serves informational purposes only. National product specifications may vary.

These materials are subject to change without notice. These materials are provided by SAP AG and its affiliated companies ("SAP Group") for informational purposes only, without representation or warranty of any kind, and SAP Group shall not be liable for errors or omissions with respect to the materials. The only warranties for SAP Group products and services are those that are set forth in the express warranty statements accompanying such products and services, if any. Nothing herein should be construed as constituting an additional warranty.

Disclaimer

Some components of this product are based on Java™. Any code change in these components may cause unpredictable and severe malfunctions and is therefore expressly prohibited, as is any decompilation of these components.

Any Java™ Source Code delivered with this product is only to be used by SAP's Support Services and may not be modified or altered in any way.

Icons

Icon	Meaning
	Caution
	Example
	Note
	Recommendation
	Syntax

Contents

1	Getting Started	6
2	Application Data Directories	6
2.1	Roaming User Application Directory.....	6
2.2	Local User Application Directory	7
3	SAP Logon Configuration	8
4	Using Branding.....	9
5	Setting Logon Language	10
6	Setting SAP Signature and Blue Crystal Theme Color	11
6.1	SAP GUI Default Color for SAP Signature and Blue Crystal Design	11
6.2	System-Specific SAP Signature Color or Blue Crystal Settings (Options Dialog)	11
6.3	System-Specific SAP Signature Color Settings (System Profile Parameter)	12
6.4	Priority of the Different SAP Signature and Blue Crystal Color Configurations	13
7	Registry Values and Read-Only Feature of SAP GUI Options Dialog.....	14
7.1	Read-Only Feature of the SAP GUI Options Dialog	14
7.2	Registry Values Used in the SAP GUI Options Dialog.....	15
7.2.1	Restore Defaults Button.....	16
7.2.2	Theme Preview/Settings Page	16
7.2.3	Font Setting Page.....	18
7.2.4	Branding Page.....	20
7.2.5	Define Custom Colors (SAP Signature).....	21
7.2.6	Color Settings Page	22
7.2.6.1	Signature Design.....	22
7.2.6.2	Blue Crystal Design	23
7.2.6.3	Enjoy Design.....	24
7.2.7	Colors in System Page.....	25
7.2.7.1	SAP Signature Design.....	25
7.2.7.2	Blue Crystal Design	27
7.2.7.3	Enjoy Design.....	28
7.2.8	Classic Design – Options page.....	29
7.2.9	Classic Design – Color in Lists Page.....	30
7.2.10	Classic Design – Color in Forms Page.....	31
7.2.11	Applications Page.....	32
7.2.12	Keyboard Settings Page	33
7.2.13	Visualization 1 Page	34
7.2.14	Visualization 2 Page	35
7.2.15	Notifications Page	36
7.2.16	Control Settings Page.....	37
7.2.17	Sound Settings Page	38
7.2.18	Accessibility Page	38
7.2.19	Scripting Page	39
7.2.20	IME Page.....	40
7.2.21	Encoding Page.....	41
7.2.22	Graphic Page	42
7.2.23	Others Page	43
7.2.24	History Page	44
7.2.25	Cache Page.....	45
7.2.26	File Lifetime Page	46
7.2.27	Local Tab Order Page.....	47
7.2.28	Session Traces Page.....	48

7.2.29	SAP GUI Traces Page	49
7.2.30	SAP Logon Traces Page	50
7.2.31	Security Settings Page	50
7.2.32	SAP Logon Options - General Page	51
7.2.33	Local Configuration Files Page	52
7.2.34	Server Configuration Files Page	53
7.2.35	Frontend Print Settings Page	55
8	Registry Values of SAP GUI in General	55
8.1	Displaying OK Code Field and Status Bar Info	55
8.2	Disabling Input History via Registry	56
8.3	Disabling/Setting Read-Only the Local Tab Order via Registry	56
9	Appendix	57
9.1	Related Information	57
9.2	Registry Keys Overview	57
9.2.1	Software\SAP\General	57
9.2.2	Software\SAP\General\Appearance	57
9.2.3	Software\SAP\General\Appearance\System	59
9.2.4	Software\SAP\General\Appearance\System\SID	59
9.2.5	Software\SAP\General\Appearance\System\SID\Client_NO	59
9.2.6	SOFTWARE\SAP\General\Appearance\Themes	59
9.2.7	Software\SAP\General\Applications\<application>	60
9.2.8	Software\SAP\General\ControlServices\WebSearchEngine	60
9.2.9	Software\SAP\General\Customer Colors	60
9.2.10	Software\SAP\General\Customer Colors\Custom Color 1	60
9.2.11	Software\SAP\SAP Shared	60
9.2.12	Software\SAP\SAPGUI	61
9.2.13	Software\SAP\SAPGUI Front\SAP Frontend Server\Accessibility	61
9.2.14	Software\SAP\SAPGUI Front\SAP Frontend Server\Administration	61
9.2.15	Software\SAP\SAPGUI Front\SAP Frontend Server\Customize	61
9.2.16	Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData	65
9.2.17	Software\SAP\SAPGUI Front\SAP Frontend Server\Palette	66
9.2.18	Software\SAP\SAPGUI Front\SAP Frontend Server\ReleaseDebug	67
9.2.19	Software\SAP\SAPGUI Front\SAP Frontend Server\ReleaseDebug\ShowBorders 67	
9.2.20	Software\SAP\SAPGUI Front\SAP Frontend Server\SapChart	68
9.2.21	Software\SAP\SAPGUI Front\SAP Frontend Server\Scripting	68
9.2.22	Software\SAP\SAPGUI Front\SAP Frontend Server\Security	68
9.2.23	Software\SAP\SAPGUI Front\SAP Frontend Server\Splitter	70
9.2.24	Software\SAP\SAPGUI Front\SAP Frontend Server\Trace	70
9.2.25	Software\SAP\SAPGUI Front\SAP Frontend Server\Window	70
9.2.26	Software\SAP\SAPGui\Administration	70
9.2.27	Software\SAP\SAPGui\Trace	70
9.2.28	Software\SAP\SAPLogon	71
9.2.29	Software\SAP\SAPLogon\Options	71
9.2.30	Software\SAP\SAPLogon\Settings	73
9.2.31	Software\SAP\SAPLogon\Settings\Connections	73
9.2.32	Software\SAP\SAPShortcut\Security	73
9.2.33	Software\Wow6432Node\SAP\SAPLogon	73

1 Getting Started

This documentation describes how to configure and administer SAP GUI for Windows.



You can find more information in the Frontend Installation Guide, the Security Guide, and the End User Guide. These documents can be found in the documentation folder of the DVD or on the [SAP GUI Family Page in SAP Community](#).

SAP GUI Scripting details can be found in the [SAP GUI Scripting Security Guide](#).

2 Application Data Directories

As of SAP GUI for Windows 7.20 the local working directory SAPWORKDIR is obsolete and a new Windows-compliant structure is used. Windows offers dedicated directories in which applications can store their application-specific data like configuration files, temporary files, etc. There are two application data directories:

- One is intended for data that should be available to roaming users on whatever machine they log on to. This is the application data directory located directly below the user profile directory and it can be reached using the environment variable `%APPDATA%`.
- The second application data directory is intended for data that will only be needed on the local machine, i.e. it will not be missed by a user when he or she logs on to a different machine. The data in this directory is not available to roaming users.

2.1 Roaming User Application Directory

The configuration files of the SAP GUI are located in the roaming user application directory as shown in the following file/location overview.

- The SAP Logon configuration files *saplogon.ini*, *sapshortcut.ini*, *SAPLogonTree.xml*, and *saprules.xml* are located in:

`%APPDATA%\SAP\Common`



Since other configuration files like *sapmsg.ini*, *saprout.ini*, and service files are used not only by SAP GUI but also by other SAP components, they are stored in the old (< SAP GUI release 7.20) storage location (see [note 38119](#)).

- Input History database:
`%APPDATA%\Roaming\SAP\SAP GUI\History`



The directory for the history database can also be set to another default with the variable *SetSapGuiHistoryDir* while creating installation packages using the SAP Installation Server Administration Tool.

The corresponding registry key is

[HKEY_LOCAL_MACHINE\Software\SAP\SAP Shared] "SaphistoryDir" on 32bit operating systems and

[HKEY_LOCAL_MACHINE\Software\Wow6432Node\SAP\SAP Shared] "SaphistoryDir" on 64bit operating systems.

Use type "Expandable String Value", do not use string!

- Local Tab Order database:
%APPDATA%\Roaming\SAP\SAP GUI\LocalTabOrder
- ABAP Editor Configuration:
%APPDATA%\Roaming\SAP\SAP GUI\ABAP Editor
- Floating Docking Container Configuration:
%APPDATA%\Roaming\SAP\SAP GUI\ABAP Editor\Docking
- SAP GUI Scripts
%APPDATA%\Roaming\SAP\SAP GUI\Scripts

2.2 Local User Application Directory

In the local application data directory, temporary files, traces etc. are stored.

- Folder for temporary documents:
%APPDATA%\Local\SAP\SAP GUI\tmp



Documents in the temporary directory will be deleted, when SAP GUI is closed. You can configure the deletion of files also in other directories. For information on this, refer to the security guide.

- Files downloaded by the user
Windows XP:
C:\Documents and Settings\<username>\My Documents\SAP\SAP GUI
Windows Vista/7:
C:\Users\<username>\Documents\SAP\SAP GUI



The directory for the downloaded files can also be set to another default with the variable *SETSAPWORKDIR* while creating installation packages using the SAP Installation Server Administration Tool.

The corresponding registry key is

[HKEY_LOCAL_MACHINE\Software\SAP\SAP Shared] "SapWorkDir" on 32bit operating systems and

[HKEY_LOCAL_MACHINE\Software\Wow6432Node\SAP\SAP Shared] "SapWorkDir" on 64bit operating systems

Type: Expandable String Value



This registry value was always set by the installation for the SAP GUI for Windows 7.10 and earlier versions. The installer of the SAP GUI for Windows as of 7.20 sets this value only, if a value has been specified in the SAP Installation Server Administration Tool. Therefore, it cannot be assumed that this registry value will exist on a client PC.

The folders for the temporary and user documents should, therefore, be determined using the corresponding methods in the class *CL_GUI_FRONTEND_SERVICES*. The temporary document folder can be obtained using the method *GET_TEMP_DIRECTORY* and the document directory can be retrieved by means of the method *GET_SAPGUI_WORKDIR*.

- Cache:

%APPDATA%\Local\SAP\SAP GUI\Cache



It would not make sense to have the cache in the roaming directory, because it is a local cache. Accessing the cache over the network would nullify the advantages that it would otherwise provide: direct and quick access to an object without a network in between.

- Traces:

Windows XP:

%APPDATA%\SAP\SAP GUI\Traces

3 SAP Logon Configuration

With the SAP UI Landscape file format, you have the choice between **two possible SAP GUI configuration scenarios**:

- **Installation with SAP UI Landscape format (default)**

This file format simplifies the configuration by unifying the persisted connection and connection configuration data from SAP GUI for Windows, SAP GUI for Java and NWBC in a modern and easy way:

- There are less configuration files involved and they are stored in the same directory.
- Configuration files can either be stored locally or on a central server or share.

2.2 Local User Application Directory

- Deployment options “pull” and “push” are available.
- The configuration files are the same for SAP GUI for Windows, SAP GUI for Java and NWBC.
- If SAP GUI has been used already, the connection data will be migrated automatically into the SAP UI Landscape format.

This format is activated by default.



Note that the installation with SAP NetWeaver Business Client (NWBC) only works with this file format.

- **Configuration without SAP UI Landscape format**

‘Classic’ installation procedure.



You can activate the classic configuration when setting the corresponding registry key LandscapeFormatEnabled. But we highly recommend to use the SAP UI Landscape format considering its advantages mentioned above.



You find a detailed description of the two configuration scenarios in Chapter *Configuration Information* in the **SAP Frontend Installation Guide 7.50** of the installation DVD. Or in the SAP GUI Configuration Guide which is also part of the DVD delivery.

4 Using Branding

You can integrate a company/branding logo in the titlebar of a SAP GUI session. In the SAP GUI Options dialog (page *Visual Design* → *Branding*), this feature is set read-only by default.

Prerequisite

- The feature can be used for SAP Signature, Corbu and Blue Crystal Design.
- The size and format of the logo should be as follows: The optimal height for the picture is 27 pixel. The shown width can be up to 160 pixel, but only if the height of 27 is not exceeded.

If the picture does not fit in size, then the picture will be scaled so that it fits the optimal height of 27 pixel. The width will be scaled symmetrically to the maximal allowed height or asymmetrically to fit the maximal allowed width.

Procedure

Proceed as follows to activate this feature and, optionally, allow users to change branding settings:

1. To rollout the settings to the users, create the following registry keys:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance] (32 Bit OS)

"UseBrandingImage" (REG_DWORD) = 1 (activates the display of a logo in the titlebar of a SAP GUI session, if a valid path to a branding picture is provided)

"BrandingImage" (REG_SZ) with path name to picture as value data:
C:\<PathToBranding>\<YourCompanyBranding>.png"

By default the branding feature is not editable by the user. Therefore, the users can see the above set values on the page *Visual Design* → *Branding* in the SAP GUI Options dialog, but they cannot change the settings because these are read-only.

2. **Optional:** In order to allow users to set this option from the SAP GUI Options dialog, you need to create the following registry values:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance]

[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance] (32 Bit OS)

"UseBrandingImage_ReadOnly" (REG_DWORD) = 0

"BrandingImage_ReadOnly" (REG_DWORD) = 0

After restart of the SAP Logon, the settings on page *Visual Design* → *Branding* will be editable. When a user changes the settings, the SAP GUI Options dialog writes these values to the following registry values under HKEY_CURRENT_USER:

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"UseBrandingImage" (REG_DWORD)

"BrandingImage" (REG_SZ)



The HKEY_CURRENT_USER values have a higher priority than values under HKEY_LOCAL_MACHINE.

5 Setting Logon Language

The default way of setting the SAP logon language is as follows: The logon screen is displayed in the language set in the backend system. If a user enters a SAP language during logon, this language will be used after logon. If the user does not enter a language, the language of the user settings will be used as logon language if it is set. If there is also no entry in the user settings, the language of the system will be used.

The logon language can be predefined in the *SAP Logon Options* → *General* dialog (option *Use SAP Logon language as default on logon screen*) or in the SAP Shortcuts dialog. These language settings are sent during connection setup to the backend. In this way, already the logon screen is displayed in the desired language and the language field is prefilled. This functions also in case of an SSO session.



In a Portal or NWBC environment, where you do not logon via a SAP GUI, an SS02 cookie is used for the connection setup. In this case, the SS02 cookie language is used.

You can switch this language predefinition feature on and off for all or only for certain systems:

- **If you want to switch this feature off for a certain system**, define a SAP Shortcut and choose *default* as language. Then, the user setting or, respectively, the backend system setting is used.
- **If you want a different logon language for a certain system than the one defined as SAP Logon language**, create a shortcut with the corresponding language defined.
- **If you want to switch this feature off for all systems**, deactivate the corresponding option in the *SAP Logon Options* dialog

6 Setting SAP Signature and Blue Crystal Theme Color

It is possible to display the SAP Signature and Blue Crystal Themes in different color schemes. The color setting can be defined in the following ways:

- As SAP GUI Default (set in the SAP GUI options dialog)
- By system and optionally by client (set in the SAP GUI options dialog)
- **SAP Signature Only:** As a System default (set via a profile parameter)

The subsections below describe the different color setting possibilities from the administrator's perspective.

6.1 SAP GUI Default Color for SAP Signature and Blue Crystal Design

SAP Logon and SAP GUI sessions, which use default color settings configuration on the client machine and for which no SAP Signature or Blue Crystal color is defined on the SAP system, are shown in the SAP Signature or Blue Crystal default color.

To rollout the default SAP Signature or Blue Crystal color to users, create the following registry key and values under HKEY_LOCAL_MACHINE:

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance]
(on 64-Bit OS)

"SelectedTheme" [REG_DWORD] = 0x1 (SAP Signature Theme)

"SignatureDefaultColor" [REG_SZ] (Possible values: "SAP Gold", "SAP Green", "SAP Purple", "SAP Red" or "SAP Signature Default")

Or

"SelectedTheme" [REG_DWORD] = 0x80 (Blue Crystal Theme)

"BlueCrystalDefaultColor" [REG_SZ] (Possible values: "SAP BC Gold", "SAP BC Green", "SAP BC Purple", "SAP BC Red" or "BlueCrystal" for the default)

The default SAP Signature or Blue Crystal color (=blue) can also be changed via the SAP GUI Options dialog on the page *Visual Design* → *Color Settings* (if the *SAP Signature Theme* or *Blue Crystal Theme* is selected in the *Theme* combobox). The SAP GUI Options dialog saves the settings under the same registry key and values, but under **HKEY_CURRENT_USER**. The HKEY_CURRENT_USER registry values have a higher priority than the registry values under HKEY_LOCAL_MACHINE.

6.2 System-Specific SAP Signature Color or Blue Crystal Settings (Options Dialog)

For SAP systems with a kernel in which the [note 1617682](#) is built in, it is possible to set a different SAP Signature or Blue color for different clients of a specific SAP system:

System-Specific SAP Signature Color Settings (System Profile Parameter)

- System-specific Rollout

To roll out the SAP Signature or Blue Crystal color setting for a specific SAP system, create the following registry key and values under HKEY_LOCAL_MACHINE:

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance\Systems\<SID>]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance\Systems\<SID>] (on 64-Bit OS)

(replace "SID" by the system ID of your SAP system)

"ThemeName" [REG_SZ] (Possible values for SAP Signature: "SAP Gold", "SAP Green", "SAP Purple", "SAP Red" or "SAP Signature Default")

"ThemeNameBC" [REG_SZ] (values for Blue Crystal: "SAP BC Gold", "SAP BC Green", "SAP BC Purple", "SAP BC Red" or "BlueCrystal" for the default)

- Client-specific Rollout

To roll out the SAP Signature color setting for a specific client in a SAP system create the following registry key and values under HKEY_LOCAL_MACHINE:

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance\Systems\<SID>\<Client>]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance\Systems\<SID>\<Client>] (on 64-Bit OS)

(replace "SID" by the System ID of your SAP system and replace client by the actual client number, for example 100)

"ThemeName" [REG_SZ] (Possible values: "SAP Gold", "SAP Green", "SAP Purple", "SAP Red" or "SAP Signature Default")

"ThemeNameBC" [REG_SZ] (Possible values for Blue Crystal: "SAP BC Gold", "SAP BC Green", "SAP BC Purple", "SAP BC Red" or "BlueCrystal" for the default)

The SAP Signature or Blue Crystal color for systems (and/or clients in system) can also be changed via the SAP GUI Options dialog on the page *Visual Design* → *Colors In System* (if *SAP Signature Theme* or *Blue Crystal Theme* is selected in the *Theme* combobox). The SAP GUI Options dialog saves the settings under the same registry keys and values, but under **HKEY_CURRENT_USER**. The HKEY_CURRENT_USER registry values have a higher priority than the registry values under HKEY_LOCAL_MACHINE.

The registry key and values under

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance\Systems]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance\Systems] (on 64-Bit OS)

are copied at startup of SAP Logon (SAP GUI) from HKEY_LOCAL_MACHINE to HKEY_CURRENT_USER without overwriting existing values.

6.3 System-Specific SAP Signature Color Settings (System Profile Parameter)

A SAP Signature color can be defined in the SAP system via the system profile parameter *sapgui/signature_color*.

[Note 1640960](#) describes this system parameter and how to set it. This note must be part of the kernel in order to support this feature.

There are several ways to overwrite a SAP Signature color which is defined by the SAP system parameter with a local configuration:

6.4 Priority of the Different SAP Signature and Blue Crystal Color Configurations

- You can ignore the SAP Signature color defined by the SAP system parameter for all systems, if you create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance]
[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance]

(on 64-Bit OS)

"SignatureSystemDependentColorsActive" [REG_DWORD] = 0

The setting can also be changed via the SAP GUI Options dialog on page *Visual Design* → *Color Settings*. The checkbox *Accept default color by SAP system* enables/disables the application of the SAP Signature color defined by the SAP system. The SAP GUI Options dialog saves the setting under the same registry key and value but under **HKEY_CURRENT_USER**. The HKEY_CURRENT_USER registry values have a higher priority than the registry values under HKEY_LOCAL_MACHINE.

- You can ignore the SAP Signature color defined by the SAP system parameter for only some specific SAP systems or clients in a SAP system. This can be achieved if one defines another SAP Signature color for this SAP system or client locally on the machine like this is described in section [System and Client-Specific SAP Signature Color Settings \(Options Dialog\)](#) of this guide.

6.4 Priority of the Different SAP Signature and Blue Crystal Color Configurations

For SAP Logon, only the locally defined default color is used as described in section [SAP GUI Default Color for SAP Signature and Blue Crystal Design](#) of this guide.

For a SAP GUI session, several settings will be checked:

1. First of all, the **locally** defined SAP Signature or Blue Crystal color for the **specific client in a specific SAP system** will be checked and applied (see section [System and Client-Specific SAP Signature or Blue Crystal Color Settings \(Options Dialog\)](#)).
2. If the client setting is not defined, the **locally** defined SAP Signature and Blue Crystal color for the specific **SAP system** will be checked and applied (see section [System and Client-Specific SAP Signature and Blue Crystal Color Settings \(Options Dialog\)](#)).
3. Only SAP Signature: If this is also not defined and the default color defined by a SAP system is set to be accepted (otherwise this step will be omitted), the SAP Signature **color defined by the SAP system** will be checked and applied (see section [System-Specific SAP Signature Color Settings \(System Profile Parameter\)](#)).
4. If the profile parameter is not set, the **locally** defined **SAP GUI default color** will be checked and applied (see section [SAP GUI Default Color for SAP Signature and Blue Crystal Design](#)).
5. If the SAP GUI default color is not defined, SAP GUI session will be shown in the **SAP Signature/Blue Crystal Default color**.

7 Registry Values and Read-Only Feature of SAP GUI Options Dialog

In this chapter, the registry values are listed which are used to customize the behavior, appearance, and functionality of SAP GUI via the SAP GUI Options dialog. In addition, this chapter shows how to define default values for specific SAP GUI settings and how to deactivate some settings in the SAP GUI Options dialog. However, it does not describe the functionality behind the registry values. For this purpose, you have to refer to the SAP GUI end user guide. For the security settings, refer to the Security Guide.



The registry access has been harmonized. This means, for most registry values, SAP GUI will first access HKEY_CURRENT_USER and, if this registry value doesn't exist, then HKEY_LOCAL_MACHINE will be accessed.

If under HKEY_LOCAL_MACHINE this registry value also does not exist, then the SAP GUI default value will be applied. In this document, only exceptions to this approach will be mentioned.

Registry keys for restricting specific settings in the SAP GUI Options dialog are only located under HKEY_LOCAL_MACHINE.

7.1 Read-Only Feature of the SAP GUI Options Dialog

It is possible to restrict the usage of the SAP GUI Options dialog by setting some or all of its options read-only. Setting the options read-only in the UI does not change the reading priority of the registry values. When options have been set read-only, the user can no longer change these settings via the SAP GUI Options dialog.

There are three possibilities to set options in SAP GUI Options dialog read-only.

1. Setting all options read-only

To set all options in the SAP GUI Options dialog read-only, create the following registry values:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General] (32 Bit OS)

"AllOptionsReadOnly" (REG_DWORD) = 1

"CurRegValReadOnlyActive" (REG_DWORD) = 0

Result: In the title bar of the SAP GUI Options dialog, the text "[read-only]" will be added.

2. Setting most options read-only and exceptions changeable

To activate the feature that most options in the SAP GUI Options dialog should be read-only and only a few exceptions should remain changeable create the following registry values:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General] (32 Bit OS)

"AllOptionsReadOnly" (REG_DWORD) = 1

7.2 Registry Values Used in the SAP GUI Options Dialog

"CurRegValReadOnlyActive" (REG_DWORD) = 1

Result: In the title bar of the SAP GUI Options dialog, the text "[partly read-only]" will be added and all options of the SAP GUI Options dialog are read-only. You can now make some special options changeable again by using the following approach:

1. You know the registry value name of the option, for example, "**SelectedTheme**".
2. You know the registry key where the registry value is located, for example, [HKEY_CURRENT_USER\Software\SAP\General\Appearance].
3. Under HKEY_LOCAL_MACHINE, you now add "_ReadOnly" to the registry value name, for example, "**SelectedTheme_ReadOnly**", and create the REG_DWORD registry value under the "same" registry key as the original registry key. For example: [HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance] (32 Bit OS); [HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance]
4. Set the "_ReadOnly" REG_DWORD registry value to 0, so that the option belonging to this registry value is again changeable in the SAP GUI Options dialog, for example "**SelectedTheme_ReadOnly**" (REG_DWORD)=0.

3. Setting most options changeable and only some exceptions read-only

To activate the feature that most options in the SAP GUI Options dialog should remain changeable and only a few exceptions should be read-only create the following registry values:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General] (32 Bit OS)

"AllOptionsReadOnly" (REG_DWORD) = 0

"CurRegValReadOnlyActive" (REG_DWORD) = 1

Result: In the title bar of the SAP GUI Options dialog, the text "[partly read-only]" will be added and all options of the SAP GUI Options dialog remain editable.

To make specific options read-only, proceed as follows:

1. You know the registry value name of the option, for example "**AnimatedFocus**".
2. You know the registry key, where the registry value is located, for example, [HKEY_CURRENT_USER\Software\SAP\General\Appearance].
3. Under HKEY_LOCAL_MACHINE, you now add "_ReadOnly" to the registry value name, for example, "**AnimatedFocus_ReadOnly**", and create the REG_DWORD registry value under the "same" registry key as the original registry key. For example:
[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance] (32 Bit OS);
[HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance]
4. Set the "_ReadOnly" REG_DWORD registry value to 1, so that the option belonging to this registry value will be set read-only in the SAP GUI Options dialog, for example, "**AnimatedFocus_ReadOnly**" (REG_DWORD)=1.

7.2 Registry Values Used in the SAP GUI Options Dialog

The following sub-chapters describe the registry values that belong to settings in the SAP GUI Options dialog.

Registry Values Used in the SAP GUI Options Dialog



If nothing is written about a special handling for the read-only feature, then the particular option can be separately set read-only as described above.

7.2.1 Restore Defaults Button

The (de)activation of the *Restore Defaults* button in the SAP GUI Options screen requires **special handling for the read-only feature**:


To set the button *Restore Defaults* read-only, create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance] (on 32 Bit OS)

"RestoreDefaults_ReadOnly"

7.2.2 Theme Preview/Settings Page

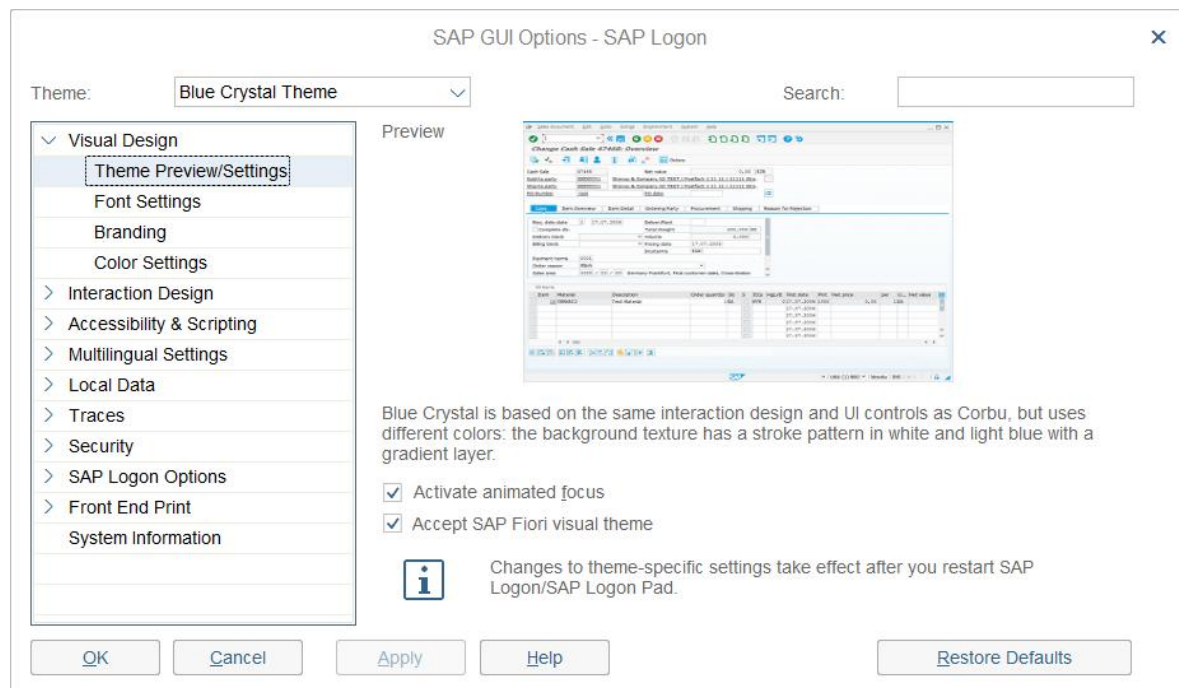

Registry Values:

Theme

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"SelectedTheme" (REG_DWORD) [Default: "1"]

Possible Values (Invalid Value à SAP Signature Design will be used):

0x1 (Dec=1) = SAP Signature Design

0x2 (Dec=2) = Enjoy Theme (Enjoy Design)

0x4 (Dec=3) = System Dependent Theme (Enjoy Design)

0x8 (Dec=8) = Streamline Theme (Enjoy Design)

0x10 (Dec=16) = Tradeshow Theme (Enjoy Design)

0x20 (Dec=32) = Classic Design

7.2 Registry Values Used in the SAP GUI Options Dialog

0x40 (Dec=64) = Corbu Design

0x80 (Dec=128) = Blue Crystal (MS Windows 7 and higher)

Restricting entries in "Theme" combobox:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Appearance\Themes]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Appearance\Themes] (32 bit OS)

"SelectableThemes" (REG_DWORD) [Default: "0x7F"] (for restricting entries in "Theme" combobox):

0x1 (Dec=1) = SAP Signature Design

0x2 (Dec=2) = Enjoy Theme (Enjoy Design)

0x4 (Dec=3) = System Dependent Theme (Enjoy Design)

0x8 (Dec=8) = Streamline Theme (Enjoy Design)

0x10 (Dec=16) = Tradeshow Theme (Enjoy Design)

0x20 (Dec=32) = Classic Design

0x40 (Dec=64) = Corbu Design

0x80 (Dec=128) = Blue Crystal (MS Windows 7 and higher)



Blue Crystal is available as of MS Windows 7. For lower MS releases, the 0x80 Blue Crystal value is treated as invalid entry and the default is used.

Example: In order to allow the selection of "Blue Crystal" and "Corbu Design" sum up the corresponding values "0x80" and "0x40" à "0xC0" or in Decimal: 64 and 128 -> 192
Please, remember to change the values in Hex format or convert the Hex values to Decimal values and then sum up the Decimal values.

In order to allow the selection of "SAP Signature Design" and "Corbu Design" sum up the corresponding values "0x1" and "0x40" à "0x41".

Activate animated focus (only SAP Signature, Corbu and Blue Crystal Design)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"AnimatedFocus" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Accept SAP Fiori visual theme

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"AcceptFioriTheme" (REG_DWORD) [Default: "1"] {0; 1}

Show shadow border (only SAP Signature and Corbu Design)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"ShowShadowBorder" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Activate high contrast theme (only SAP Signature Design)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]


"High Contrast Theme" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Corbu style icons (only SAP Signature Design)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"Corbulcon" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

7.2.3 Font Setting Page

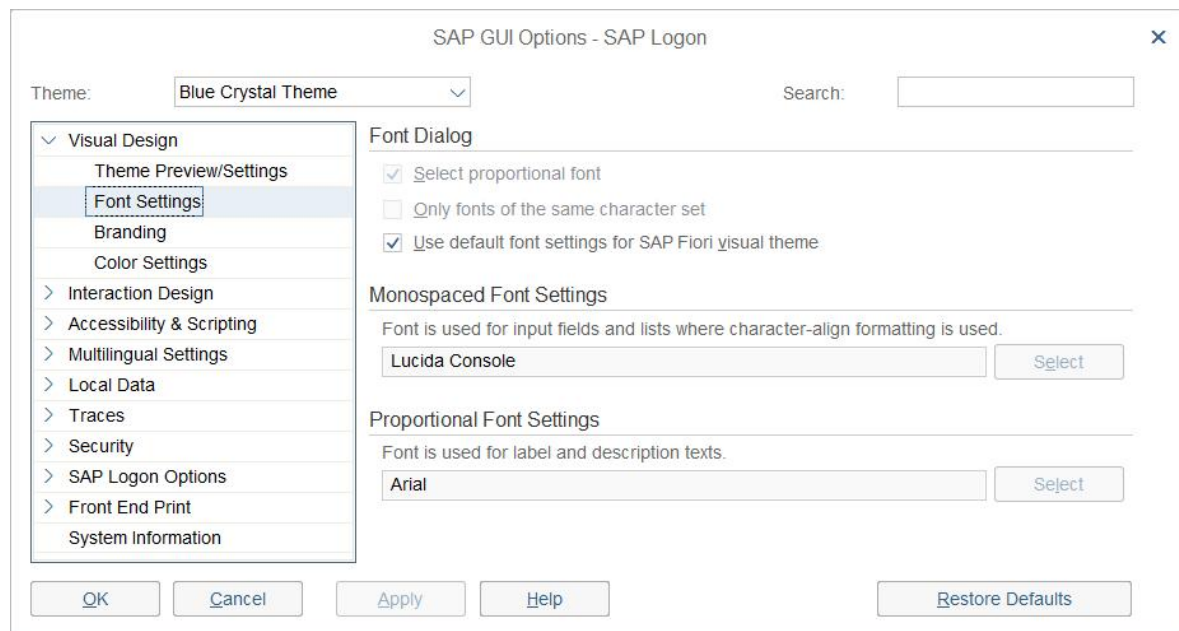

Registry Values

Select proportional font

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "KanjiFontDialogProp" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Only fonts of the same character set

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "KanjiFontDialogScript" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Use default font settings for SAP Fiori visual theme

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "UseBelizeFontSettings" (REG_DWORD) [Default: "1"] {0; 1}

Monospaced Font Settings

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]



Note that for SAP Fiori Visual Theme (Belize) partly other registry values have to be used as stated below.

"Font.Height" (REG_DWORD) [Default: "15"]

"Font.Width" (REG_DWORD) [Default: "0"]

"Font.CharSet" (REG_DWORD) [Default: set system charset or "0"]

"Font.FaceName" (REG_SZ) [Default: depends on the set charset]

Fiori Visual Theme (Belize):

"Belize.Font.Height" (REG_DWORD) [Default: "0xffffffff" == "-14"]

"Belize.Font.Width" (REG_DWORD) [Default: "0"]

"Belize.Font.FaceName" (REG_SZ) [Default: depends on the set charset]



- **Special handling for read-only feature:**

“Setting most options changeable and only some exceptions read-only”:

It is enough to set one of the fixed font registry values read-only, so that the *Select* button will be disabled.

“Setting most options read-only and exceptions changeable”:

For all the fixed font registry values a corresponding “*_ReadOnly” REG_DWORD registry value must be created and set to “0”, so that the *Select* button will be enabled. Until the release of SAP GUI 7.20 patch 2, also the following registry values must be created and set to “0”: “Font.Bold_ReadOnly”, “Font.Pitch_ReadOnly” and “Font.Size_ReadOnly”

Proportional Font Settings



Note that for SAP Fiori Visual Theme (Belize) partly other registry values have to be used as stated below.

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Prop.Height” (REG_DWORD) [Default: “15”]

“Prop.Width” (REG_DWORD) [Default: “0”]

“Prop.CharSet” (REG_DWORD) [Default: set system charset or “0”]

“Prop.FaceName” (REG_SZ) [Default: depends on the set charset]

Fiori Visual Theme (Belize):

“Belize.Prop.Height” (REG_DWORD) [Default: “0xffffffff2” == “-14”]

“Belize.Prop.Width” (REG_DWORD) [Default: “0”]

“Belize.Prop.FaceName” (REG_SZ) [Default: depends on the set charset]



Special handling for read-only feature:


“Setting most options changeable and only some exceptions read-only”:

It is enough to set one of the proportional font registry values read-only, so that the *Select* button will be disabled.

“Setting most options read-only and exceptions changeable”:

For all the proportional font registry values a corresponding “*_ReadOnly” REG_DWORD registry value must be created and set to “0”, so that the *Select* button will be enabled. Until the release of SAP GUI 7.20 patch 2, also the following registry values must be created and set to “0”: “Prop.Bold_ReadOnly”, “Prop.Pitch_ReadOnly” and “Prop.Size_ReadOnly”

7.2.4 Branding Page

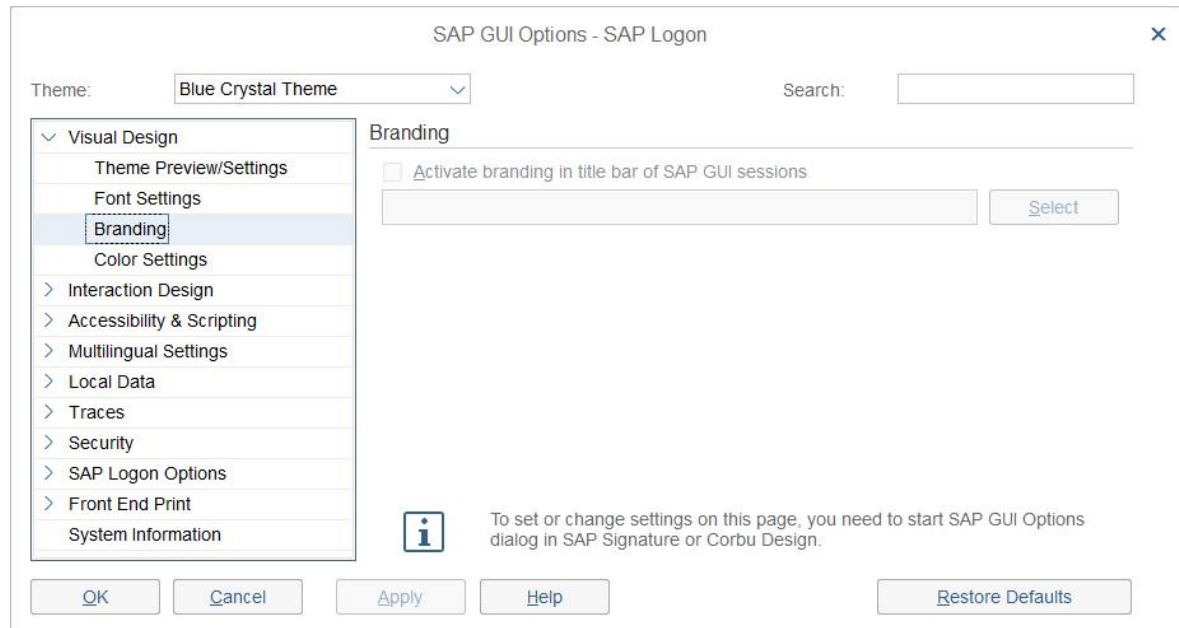

Registry Values

Activate branding

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"UseBrandingImage" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Path to branding image

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"BrandingImage" (REG_SZ) [Default: ""] {valid path to a valid image file}

By default, this page is read-only. To set this page changeable, create the following registry values (it is not necessary to activate the read-only feature for setting this page changeable):


[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"UseBrandingImage_ReadOnly" (REG_DWORD) = 0

"BrandingImage_ReadOnly" (REG_DWORD) = 0

You find more information on branding in section [Using Branding](#) in this guide.

7.2.5 Define Custom Colors (SAP Signature)

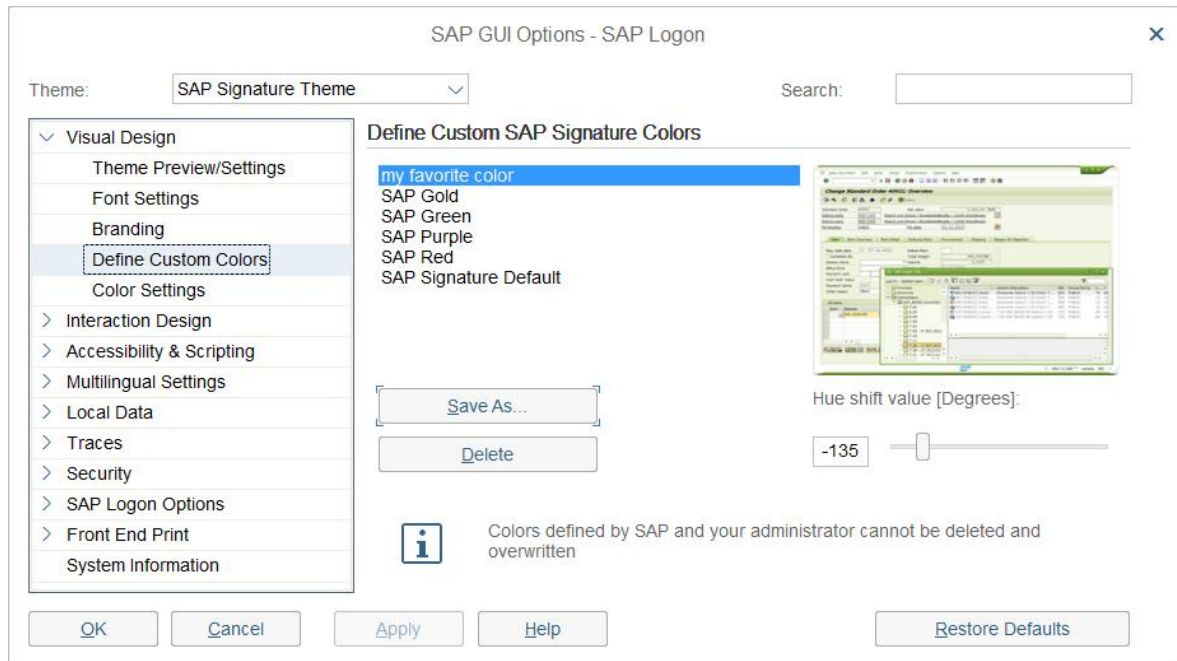

This dialog is only available for Win7 and when having chosen SAP Signature design.

Registry Values

Define Custom SAP Signature Colors

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\Customer Colors\Custom Color 1]

“Hue” (REG_DWORD) [Default: no default → value must exist] { [0;360]: add 180 to the value which you see in the Options Dialog e.g.: “-20” → calculated **decimal** value for “Hue” registry value “160” }

Registry key name “**Custom Color 1**” is the name of the color, which can be selected as SAP Signature Color on the pages *Color Settings/Colors in Systems*. Names for custom SAP Signature colors are freely selectable with the exception of color names which are already defined by SAP. The *Options* dialog prevents the creation of such values (if you create the registry key/value on your own, make sure you provide correct names for the color and correct values for the hue shift value).

If the “Hue” registry value does not exist, then it will not be listed in the *Options* dialog and has no effect. If a value is bigger than 360, it will be set to 360 (180 in the *Options* dialog).

If there is a registry key under HKLM, HKCU is not checked anymore and this entry cannot be changed or deleted anymore in the Options dialog. This is also the case for the colors predefined by SAP.

**Special handling for read-only feature:**


It is only possible to set the complete page read-only/changeable by creating the following registry value:

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\Customer Colors]

“CustomColors_ReadOnly” (REG_DWORD)

7.2.6 Color Settings Page

7.2.6.1 Signature Design

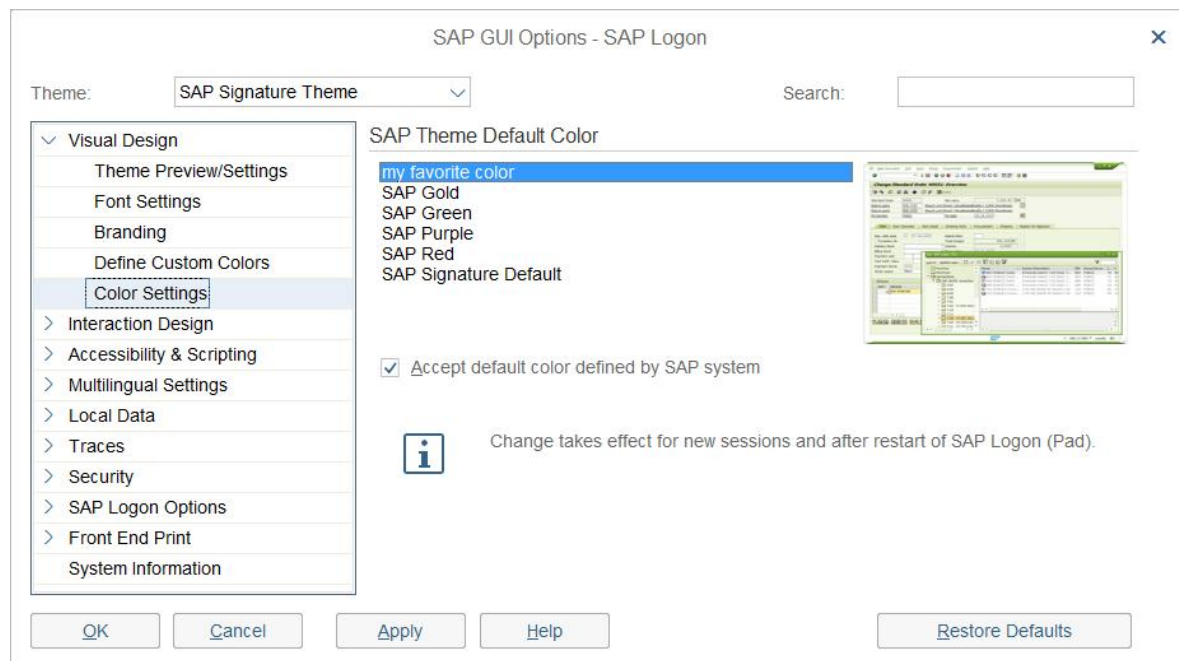

Registry Values

SAP Theme Default Color

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

“SignatureDefaultColor” (REG_SZ) [Default: “”]

Possible values:

“SAP Gold”

“SAP Green”

“SAP Purple”

“SAP Red”


“SAP Signature Default”; in case of an empty string, missing registry value, or invalid value, the *SAP Signature Default* is used.

Accept default color defined by SAP systems

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

“SignatureSystemDependentColorsActive” (REG_DWORD) [Default: “1”] {0 = inactive; 1 = active}

7.2.6.2 Blue Crystal Design

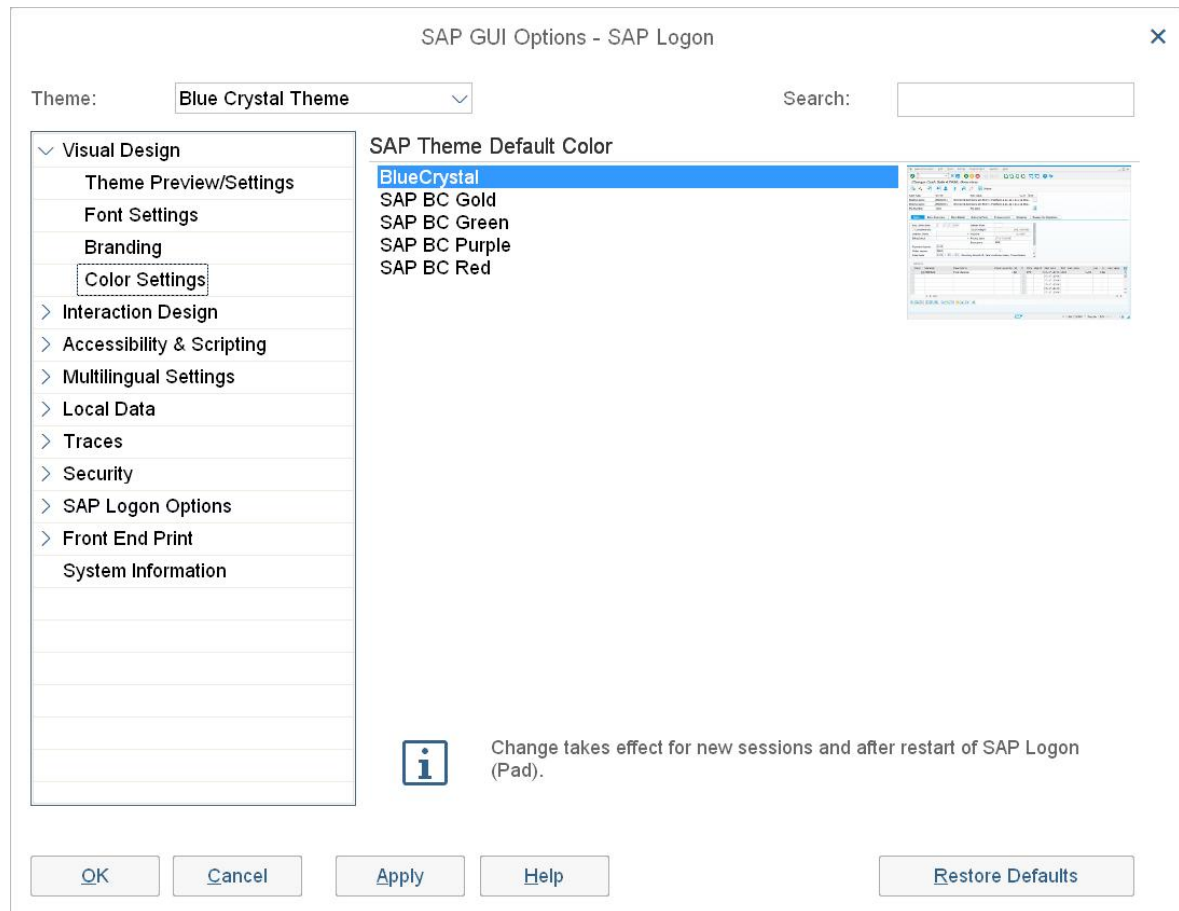

Registry Values

SAP Theme Default Color

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"BlueCrystalDefaultColor" (REG_SZ) [Default: ""]

Possible values:

"SAP BC Gold"


"SAP BC Green"

"SAP BC Purple"

"SAP BC Red"

"Blue Crystal"; in case of an empty string, missing registry value, or invalid value, the *BlueCrystal* is used.

7.2.6.3 Enjoy Design

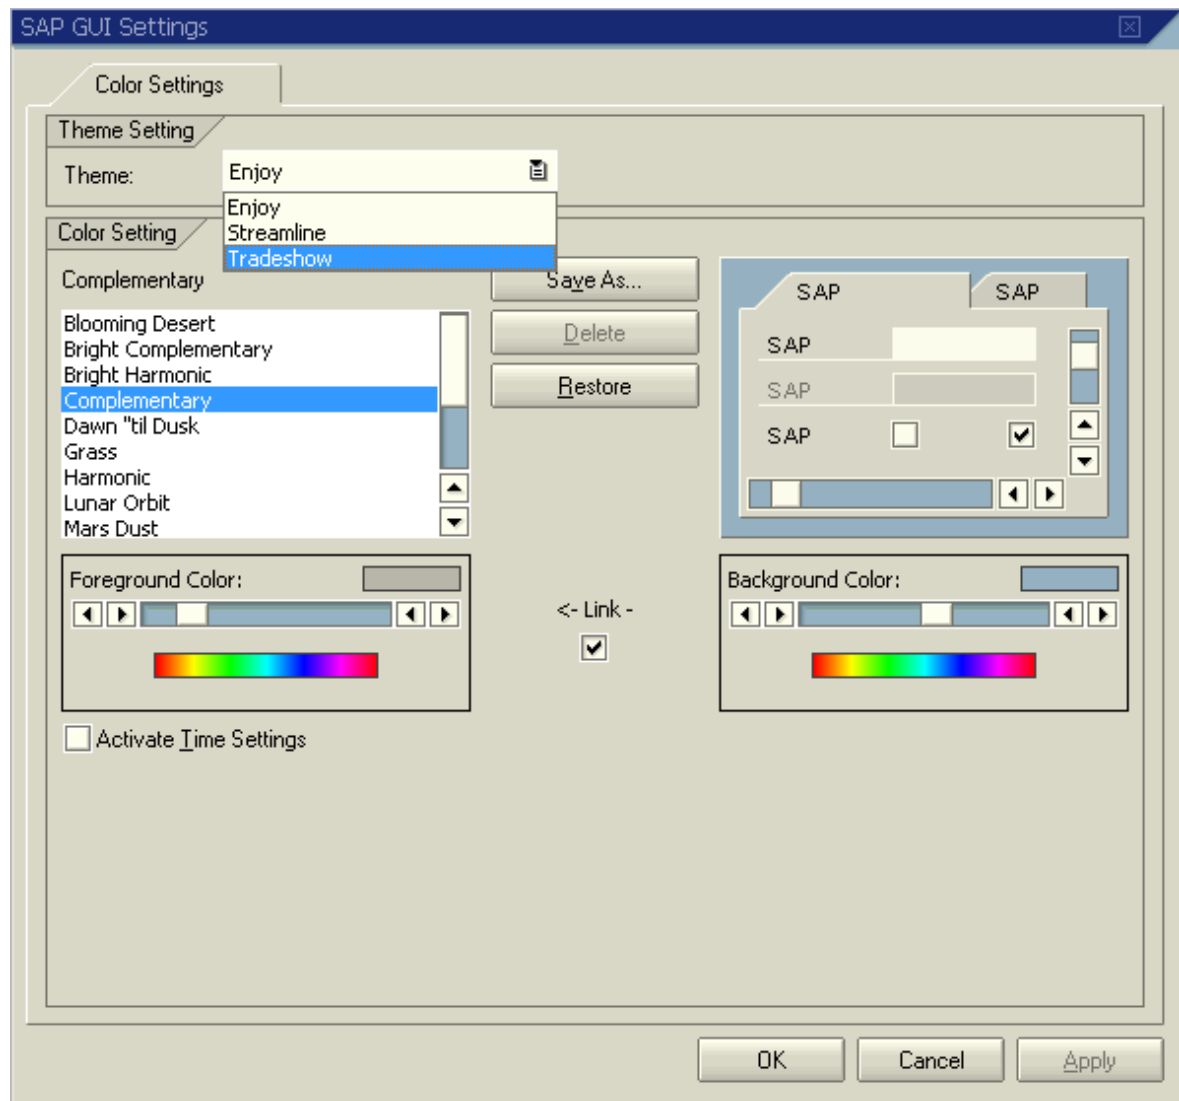

Registry Values

Here, the registry key depends on selected theme:

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\Themes\Enjoy] or
 [HKEY_CURRENT_USER\Software\SAP\General\Appearance\Themes\Streamline] or
 [HKEY_CURRENT_USER\Software\SAP\General\Appearance\Themes\Tradeshows]

All changes will be stored under this registry key.

At SAP Logon (Pad) start-up, default values from HKEY_LOCAL_MACHINE will be copied to HKEY_CURRENT_USER, if the registry value does not already exist.



Special handling for read-only feature:

It is only possible to set the complete dialog read-only/changeable by creating the following registry value:


[HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance\Theme
 s]

[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance\Themes]
(on 32 Bit OS)

"ThemesCustomize_ReadOnly" (REG_DWORD)

7.2.7 Colors in System Page

7.2.7.1 SAP Signature Design

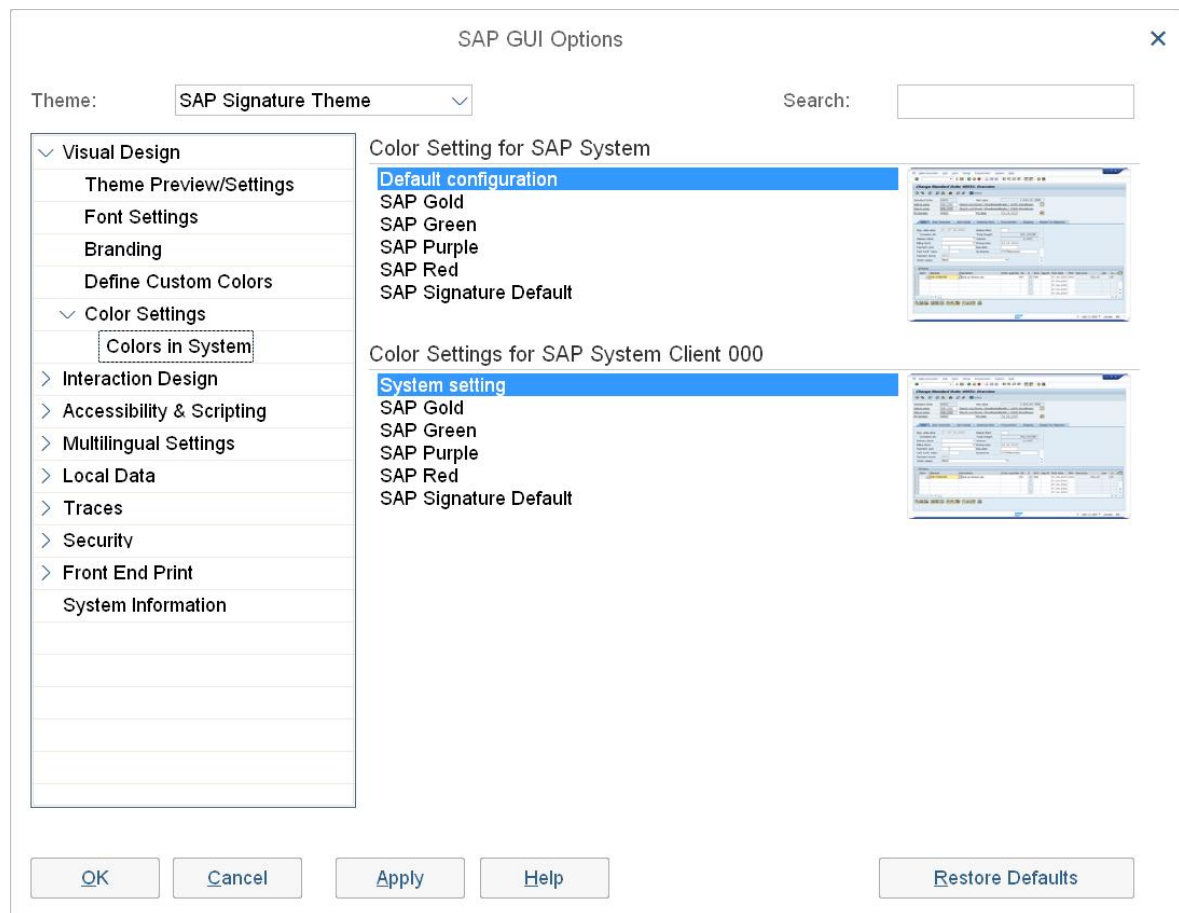

Registry Values

Color Setting for SAP system SID

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\System\SID]

"ThemeName" (REG_SZ) [Default: registry key and registry value do not exist] {"SID" in the registry key is your SAP System ID}

Possible values:

Value does not exist or is empty à "Default configuration" or SAP system configuration

"SAP Gold"

"SAP Green"

"SAP Purple"

"SAP Red"

Registry Values Used in the SAP GUI Options Dialog

“SAP Signature Default”

Color Settings for SAP system SID client <number> (only possible in SAP Signature Design and if the backend supports this feature)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\Systems\SID\000]

“ThemeName” (REG_SZ) [Default: registry key and registry value do not exist] {“SID” in the registry key is your SAP System ID and <number> is the current client in the SAP system, for example 000}

Possible values: the same like for “Color Setting for SAP system SID”

You find more information for system/client-dependent color theming in section [Setting SAP Signature Theme Color](#).



Special handling for read-only feature:

It is only possible to set the complete page read-only/changeable by creating the following registry value:


[HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance\Systems]

[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance\Systems]

(on 32 Bit OS)

“ColorsSystemSpecific_ReadOnly” (REG_DWORD)

7.2.7.2 Blue Crystal Design

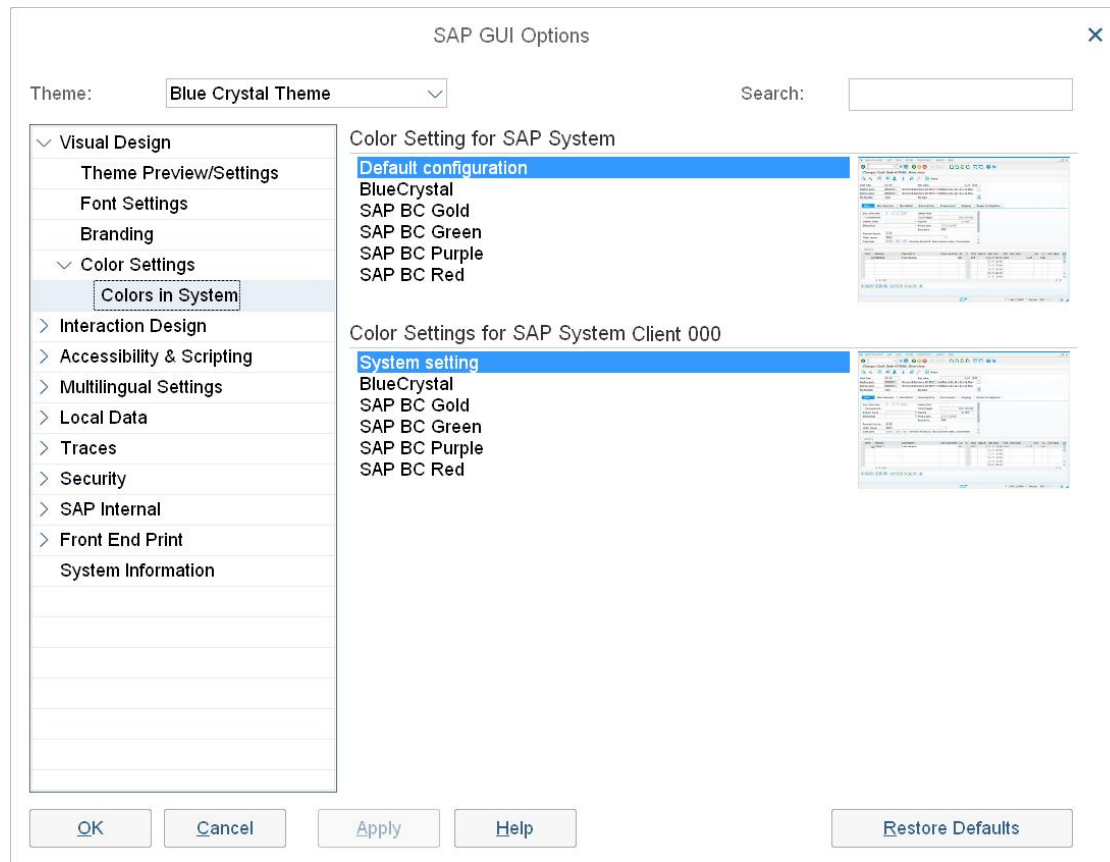

Registry Values

Color Setting for SAP system SID

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\System\SID]

"ThemeNameBC" (REG_SZ) [Default: registry key and registry value do not exist] {"SID" in the registry key is your SAP System ID}

Possible values:

Value does not exist or is empty → "Default configuration" or SAP system configuration

"SAP BC Gold"

"SAP BC Green"

"SAP BC Purple"

"SAP BC Red"

"Blue Crystal"

Color Settings for SAP system SID client <number> (only possible in SAP Signature Design and if the backend supports this feature)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\System\SID\000]

"ThemeNameBC" (REG_SZ) [Default: registry key and registry value do not exist] {"SID" in the registry key is your SAP System ID and <number> is the current client in the SAP system, for example 000}

Possible values: the same like for "Color Setting for SAP system SID"

**Special handling for read-only feature:**

It is only possible to set the complete page read-only/changeable by creating the following registry value:


[HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance\System
s]

[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance\System

s]
(on 32 Bit OS)

“ColorsSystemSpecific_ReadOnly” (REG_DWORD)

7.2.7.3 Enjoy Design

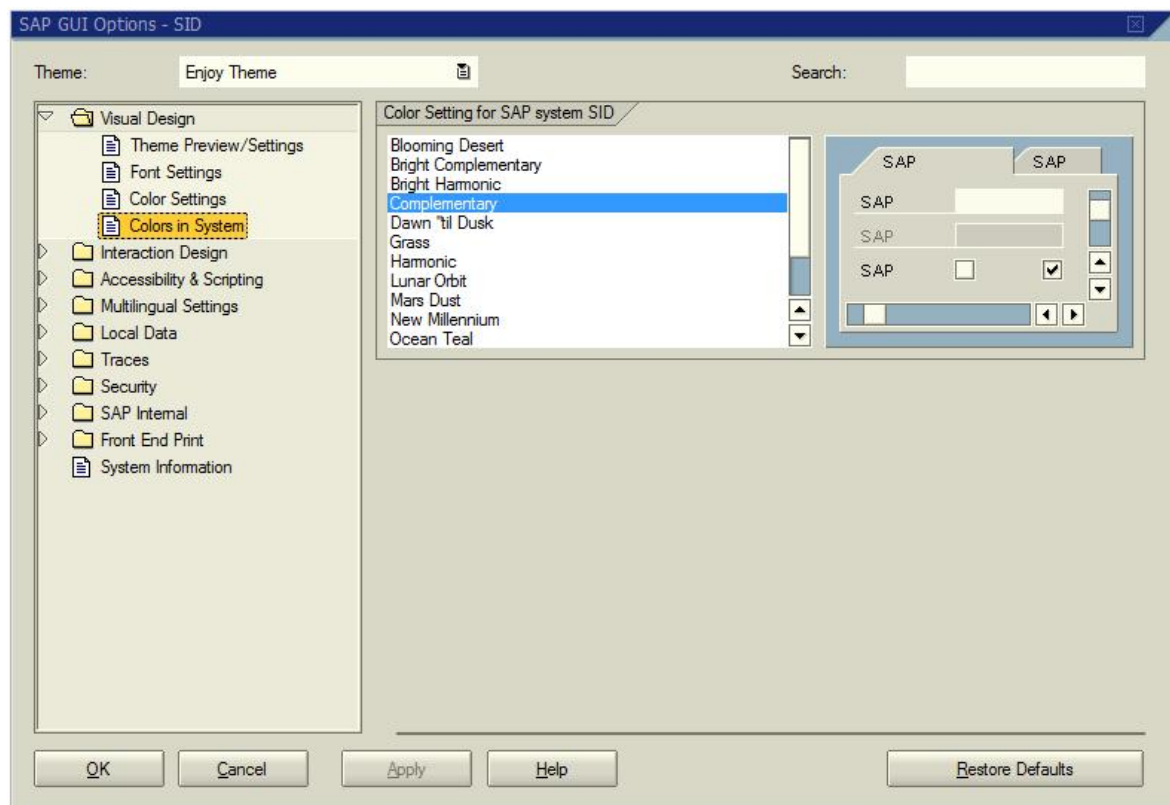**Registry Values****System-dependent Enjoy Design theme**

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\System\SID]

“Theme” (REG_SZ) [Default: registry key and registry value do not exist] {“SID” in the registry key is your SAP System ID}

Possible values:

“Enjoy”

“Streamline”

“Tradeshow”


Color Setting for SAP System SID (only possible in Enjoy Design and if the backend support this feature)

[HKEY_CURRENT_USER\Software\SAP\General\Appearance\Systems\SID]

“ActiveColorSetting” (REG_SZ) [Default: registry key and registry value do not exist] {“SID” in the registry key is your SAP System SID}

Possible values: available color settings name from the listbox, for example, “Complementary” for “Enjoy”

7.2.8 Classic Design – Options page

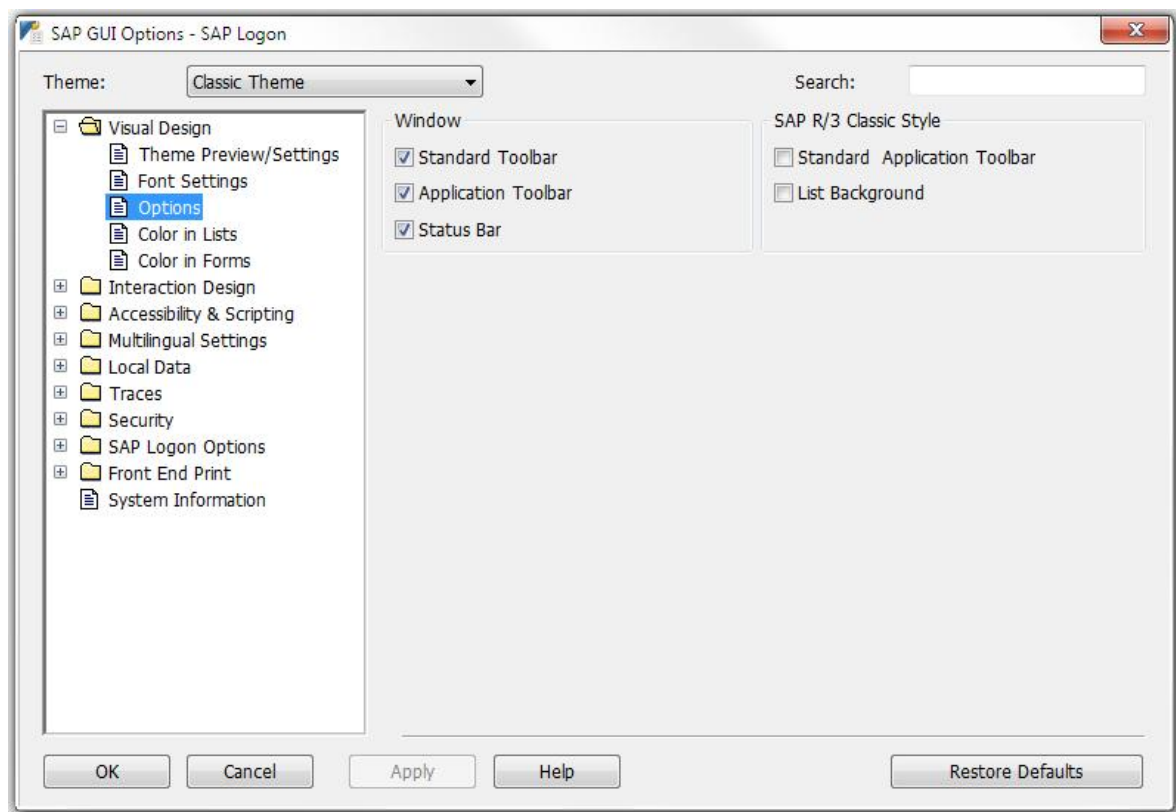

Registry Values

Standard Toolbar

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Toolbar” (REG_DWORD) [Default: “1”] {0 = inactive; 1 = active}

Application Toolbar

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Buttonbar” (REG_DWORD) [Default: “1”] {0 = inactive; 1 = active}

Status Bar

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Statusbar” (REG_DWORD) [Default: “1”] {0 = inactive; 1 = active}

Standard Application Toolbar


[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Toolbar.RegularButtons” (REG_DWORD) [Default: “0”] {0 = inactive; 1 = active}

List Background

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

"ColorScheme" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

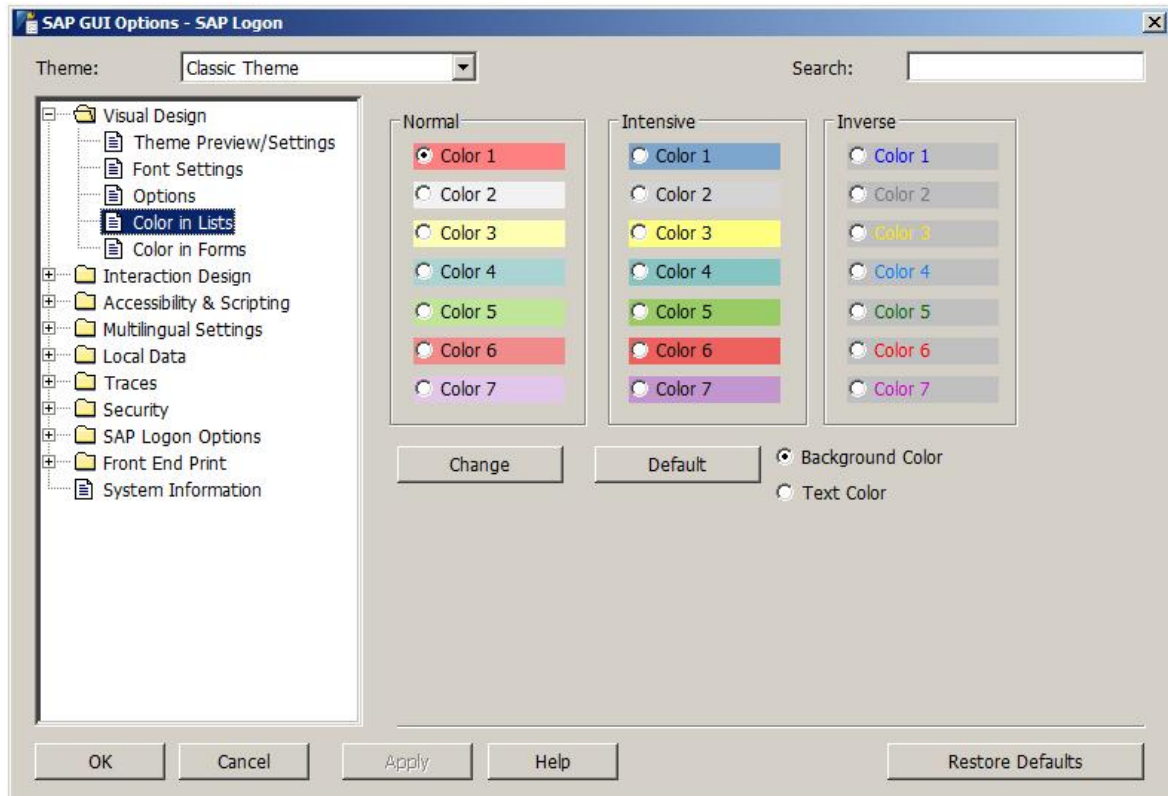7.2.9 Classic Design – Color in Lists Page**Registry Values****Normal**

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Palette]

Background Color

"NormalColor1" (REG_SZ) [Default: "255 128 128"] {RGB value} till

"NormalColor7" (REG_SZ) [Default: "227 199 235"] {RGB value}

Text Color

"NormalText1" (REG_SZ) [Default: "0 0 0"] {RGB value} till

"NormalText7" (REG_SZ) [Default: "0 0 0"] {RGB value}

Intensive

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Palette]

Background Color

"IntensiveColor1" (REG_SZ) [Default: "125 166 207"] {RGB value} till

"IntensiveColor7" (REG_SZ) [Default: "196 150 207"] {RGB value}

Text Color

"IntensiveText1" (REG_SZ) [Default: "0 0 0"] {RGB value} till

"IntensiveText7" (REG_SZ) [Default: "0 0 0"] {RGB value}

Inverse

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Palette]

Background Color


"InverseColor1" (REG_SZ) [Default: "192 192 192"] {RGB value} till

"InverseColor7" (REG_SZ) [Default: "192 192 192"] {RGB value}

Text Color

"InverseText1" (REG_SZ) [Default: "0 0 255"] {RGB value} till

"InverseText7" (REG_SZ) [Default: "204 0 204"] {RGB value}

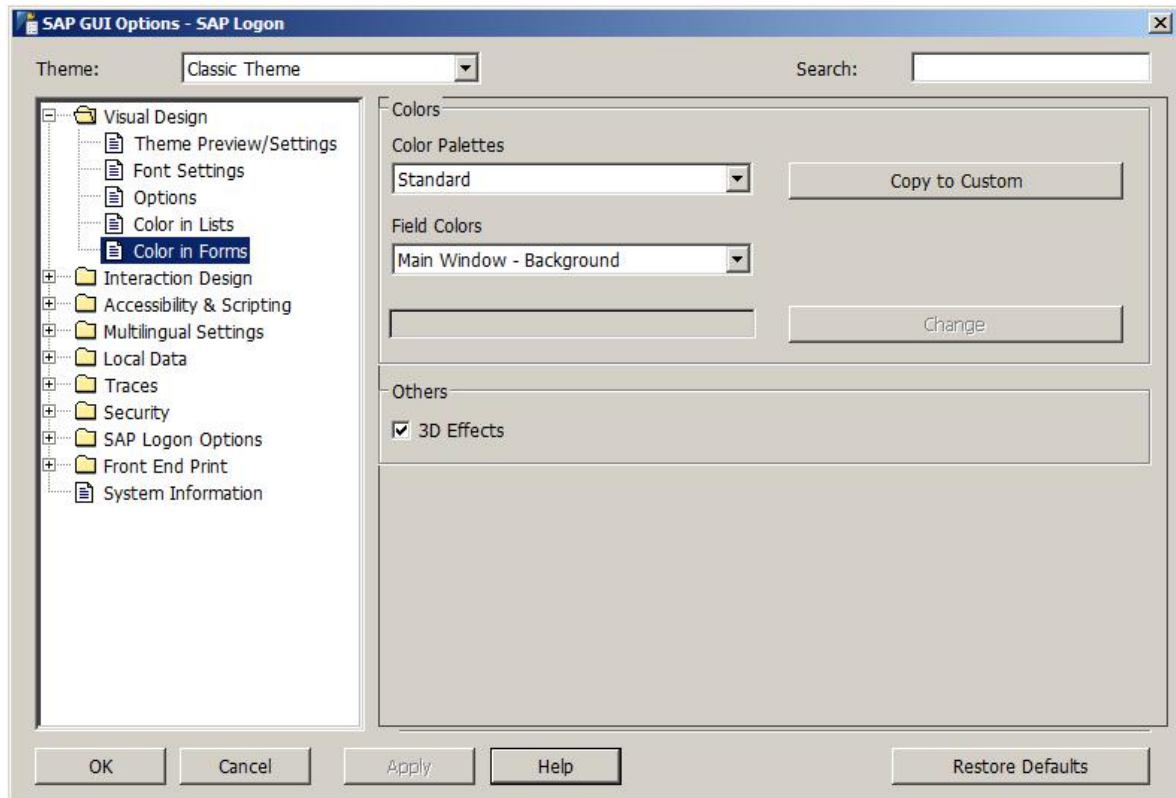7.2.10 Classic Design – Color in Forms Page**Registry Values****Color Palettes**

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Palette]

"Palette" (REG_DWORD) [Default: "0"]

Possible values: 1 - 12

Field Colors

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Palette]

"Edit.BgndBrush" (REG_SZ) [Default: "255 255 255"] {RGB value}

"Edit.FocusBrush" (REG_SZ) [Default: "255 255 255"] {RGB value}

"Edit.TextNorm" (REG_SZ) [Default: "0 0 0"]

"Edit.TextInt" (REG_SZ) [Default: "255 0 0"]

"Read.BgndBrush" (REG_SZ) [Default: system defined value for "Face color for three-dimensional display elements and for dialog box backgrounds"] {RGB value}

"Read.FocusBrush" (REG_SZ) [Default: same value as "Read.BgndBrush"] {RGB value}

"Read.TextNorm" (REG_SZ) [Default: "0 0 0"] {RGB value}

"Read.TextInt" (REG_SZ) [Default: "0 0 255"] {RGB value}

"Static.TextNorm" (REG_SZ) [Default: "0 0 0"] {RGB value}

"Static.TextInt" (REG_SZ) [Default: "0 0 255"] {RGB value}

"Frame.BgndBrush" (REG_SZ) [Default: same value as "Read.BgndBrush"] {RGB value}

Registry Values Used in the SAP GUI Options Dialog


“View.BgndBrush” (REG_SZ) [Default: same value as “Read.BgndBrush”] {RGB value}

3D Effects

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]

“Shadow” (REG_DWORD) [Default: “1”]

“ListEffect” (REG_DWORD) [Default: “1”]

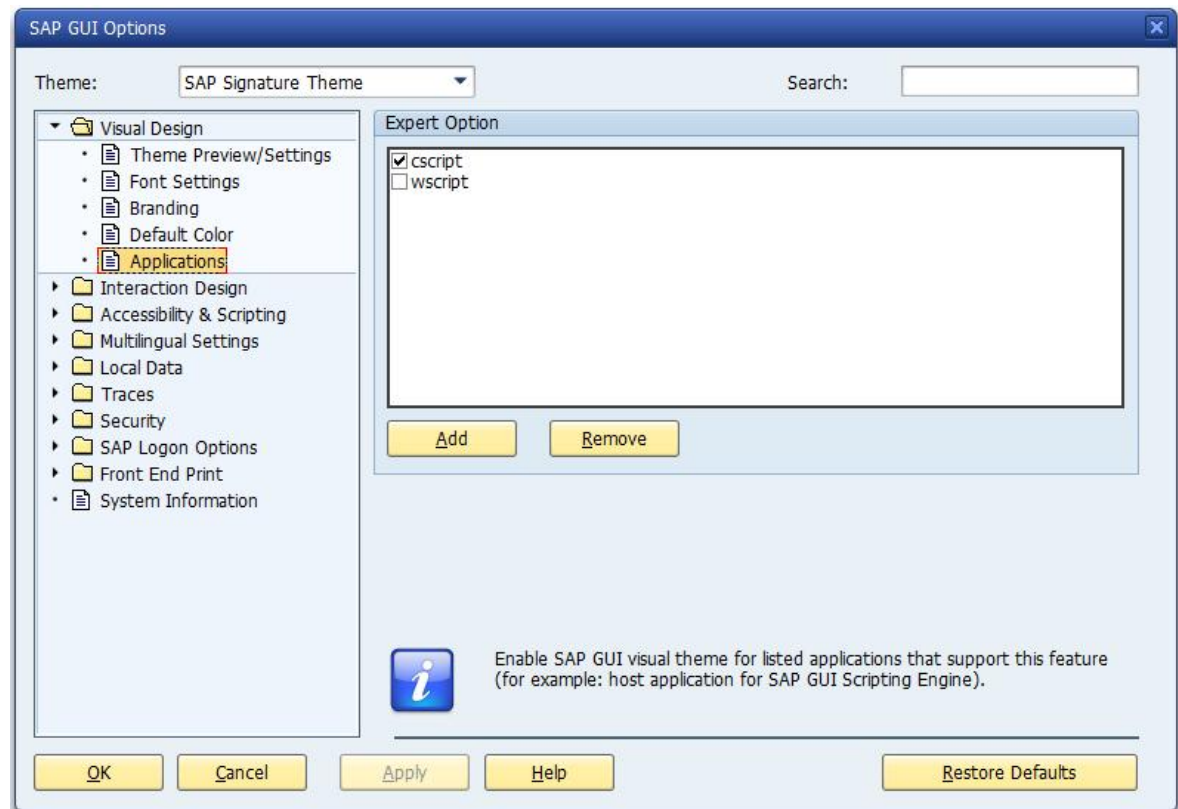7.2.11 Applications Page**Registry Values****Application name in list**

[HKEY_CURRENT_USER\Software\SAP\General\Applications\<application>], for example:

[HKEY_CURRENT_USER\Software\SAP\General\Applications\cscript]

In this example, “cscript” is the application name of “cscript.exe”.

Enable SAP GUI visual theme (checked/unchecked state)

[HKEY_CURRENT_USER\Software\SAP\General\Applications\cscript]

“Enjoy” (REG_SZ) [Default: “On”] {“Off” = inactive; “On” = active}

**Special handling for read-only feature:**


To set the whole page read-only/changeable, create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\General\Applications]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\General\Applications] (on 32-Bit OS)

“AppsSapGuiVisualTheme_ReadOnly”

7.2.12 Keyboard Settings Page

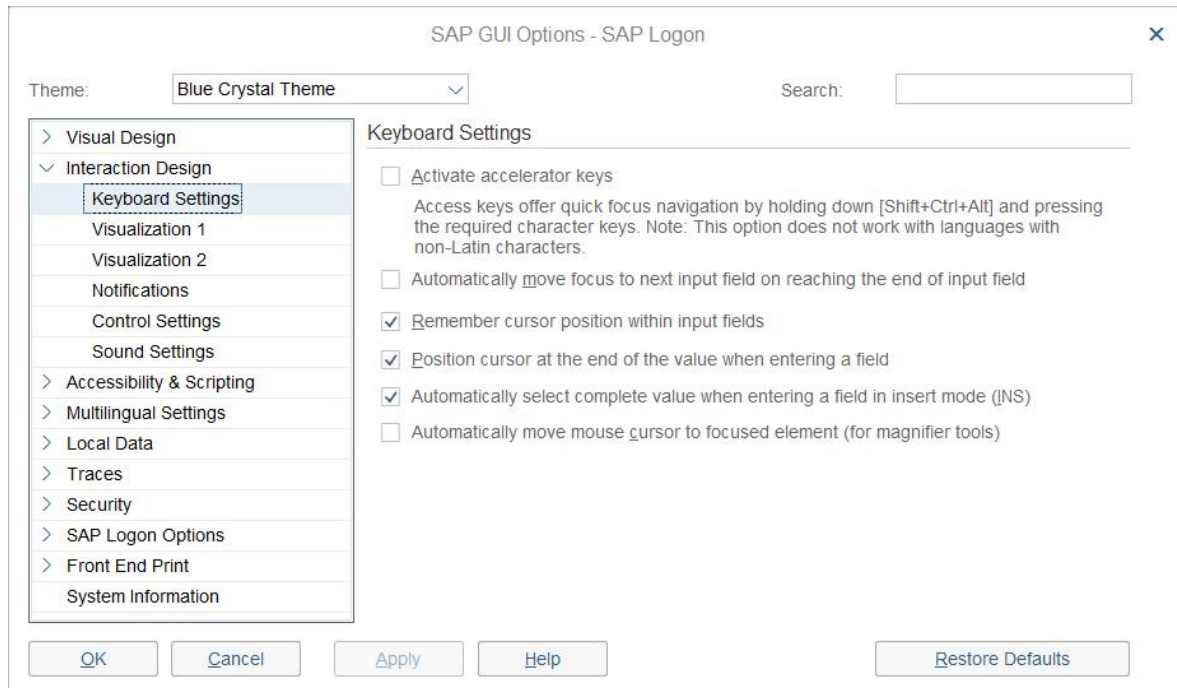

Registry Values

Activate access keys

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "UseClientAccesskeys" (REG_DWORD) [Default: AccMode enabled à "1" otherwise "0"] {0 = inactive; 1 = active}

Automatically move focus to next input field

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "AutoTAB" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Remember cursor position within input fields

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "PositionTAB" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Position cursor at the end of value when entering a field

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "PositionMouse" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Automatically select complete value

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Edit.EnterFieldSelectAll" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Automatically move mouse cursor to focused element

[HKEY_CURRENT_USER\Software\SAP\General\Applications]
 "MouseFollowFocus" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

7.2.13 Visualization 1 Page

SAP GUI Options - SAP Logon

Theme: SAP Signature Theme Search:

- Visual Design
 - Theme Preview/Settings
 - Font Settings
 - Branding
 - Define Custom Colors
 - Color Settings
- Interaction Design
 - Keyboard Settings
 - Visualization 1**
 - Visualization 2
 - Notifications
 - Control Settings
 - Sound Settings
- > Accessibility & Scripting
- > Multilingual Settings
- > Local Data
- > Traces
- > Security
- > SAP Logon Options
- > Front End Print
- System Information

Cursor Width for Input Fields on Screens

☐ Narrow cursor ☒ Wide cursor

☐ Use block cursor in overwrite mode (OVR)

Controls

☐ Show keys within dropdown lists

☐ Sort by keys within dropdown lists for most efficient keyboard input

OK Code

☒ Show OK Code field

☒ Show dialog box for OK Code in batch input

Lists

☒ Use cursor within lists

☒ Show lines in lists

☐ Underline links in lists

☒ Allow Microsoft ClearType to be used for text in lists

OK Cancel Apply Help Restore Defaults

Registry Values

Cursor Width for Input Fields on Screens

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Edit.CaretWidth" (REG_DWORD) [Default: "2"] {1 = narrow; 2 = wide}

Use block cursor in overwrite mode (OVR)

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Edit.BlockCursor" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Show keys within dropdown lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Dropdown.ShowKey" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Sort by keys within dropdown lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Dropdown.SortKey" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}



This option can only be activated, if also *Show key within dropdown lists* is activated.

Show OK Code field

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "HideCmdLinePermanently" (REG_DWORD) [Default: "0"] {0; 1}

7.2 Registry Values Used in the SAP GUI Options Dialog

Show dialog box for OK code in batch input

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "PopupBatchIn" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Use cursor within lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "ListCursor" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Show lines in lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "ListLines" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}


Underline links in lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "UnderlineHotspot" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Allow Microsoft ClearType to be used for texts in lists

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "ListAllowClearType" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

7.2.14 Visualization 2 Page

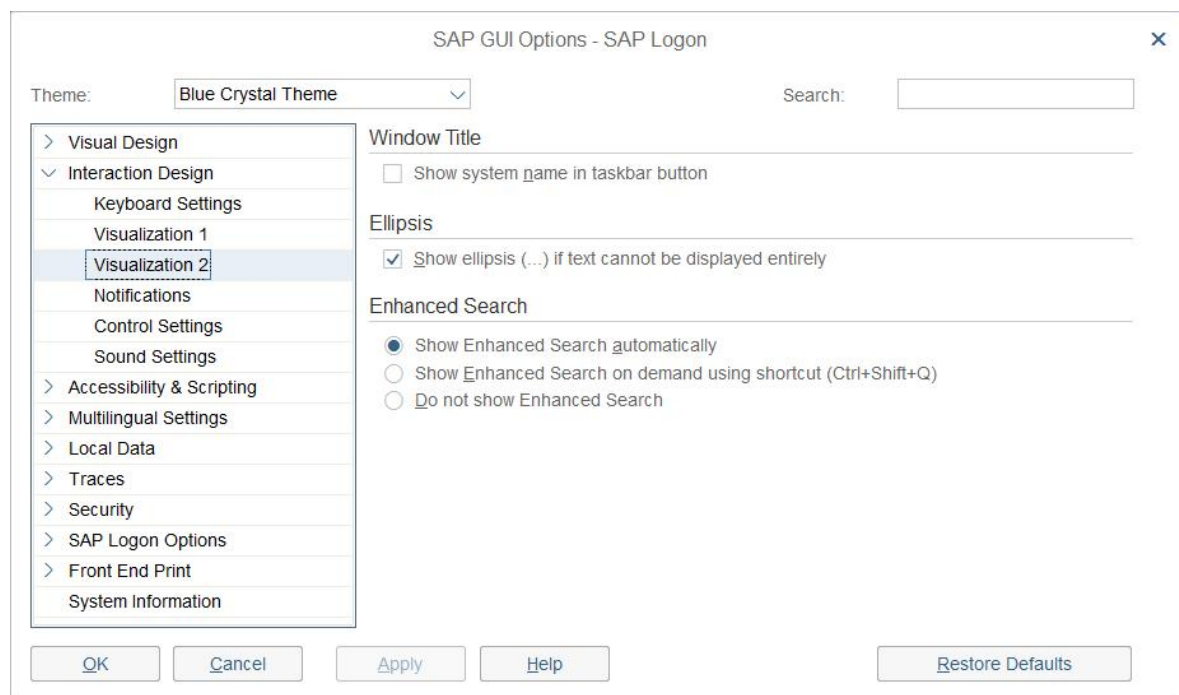

Registry Values

Show system name in taskbar button


[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\ Administration]
 "ShowAdditionalTitleInfo" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Ellipsis

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]
 "EllipsisFor18n" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Enhanced Search

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"EnhancedSearchMode" (REG_DWORD) [Default: "1"] {0 = do not show; 1 = show automatically; 2 = show on demand}

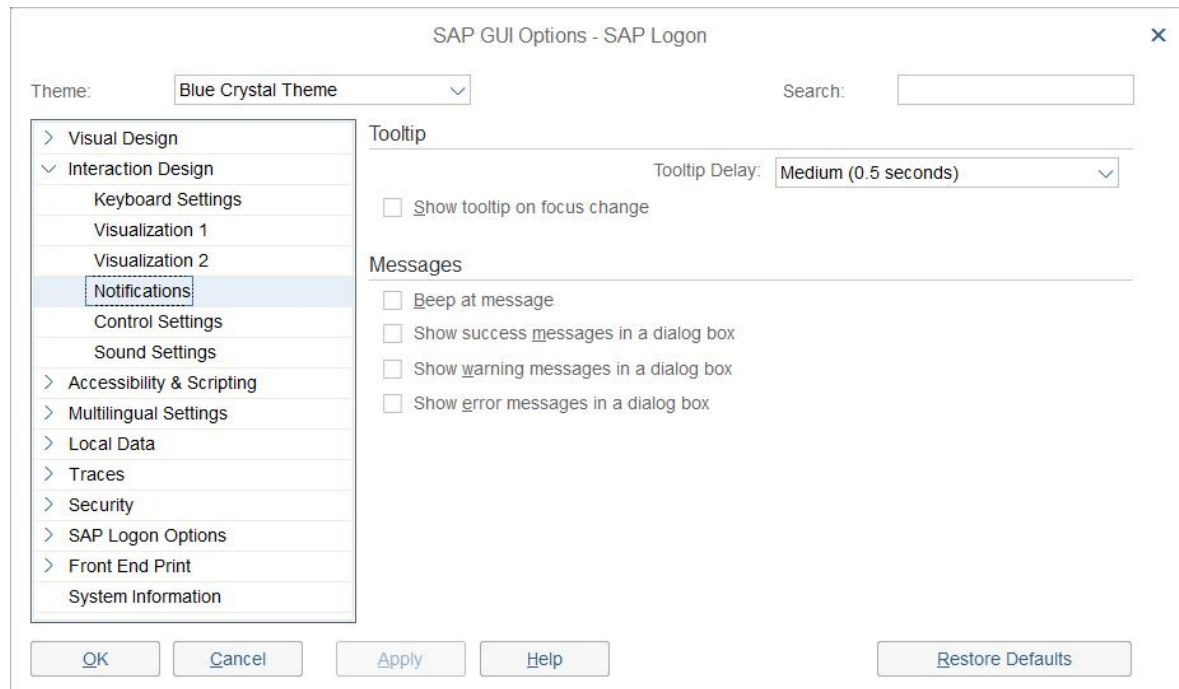7.2.15 Notifications Page**Registry Values****Tooltip delay**

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"BubbleDelay" (REG_DWORD) [Default: "1"] {0 = quick; 1 = medium; 2 = slow; 3 = none}

Show tooltip on focus change

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"BubbleOnTab" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Beep at message

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"BeepError" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Show success messages in a dialog box

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"PopupSuccess" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Show warning messages in a dialog box

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"PopupWarning" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Show error messages in a dialog box

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"PopupError" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

7.2.16 Control Settings Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

> Visual Design
 > Interaction Design
 Keyboard Settings
 Visualization 1
 Visualization 2
 Notifications
 Control Settings
 Sound Settings
 > Accessibility & Scripting
 > Multilingual Settings
 > Local Data
 > Traces
 > Security
 > SAP Logon Options
 > Front End Print
 System Information

Additional Control Services

☒ Enable additional control services Search Provider: Google

Docking Container

☐ Customizable docking container position

OK Cancel Apply Help Restore Defaults

Registry Values

Enable additional control services

[HKEY_CURRENT_USER\Software\SAP\General]

"SAPGUIControlPlugin" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Search Provider

[HKEY_CURRENT_USER\Software\SAP\General\ControlServices\WebSearchEngine]


"WebSearchEngine" (REG_SZ) [Default: "Google"] {"AltaVista", "Google", "MSN", "Yahoo!"}

Customizeable docking container position

[HKEY_CURRENT_USER\Software\SAP\General]

"SAPDockAllowMoveSave" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

7.2.17 Sound Settings Page

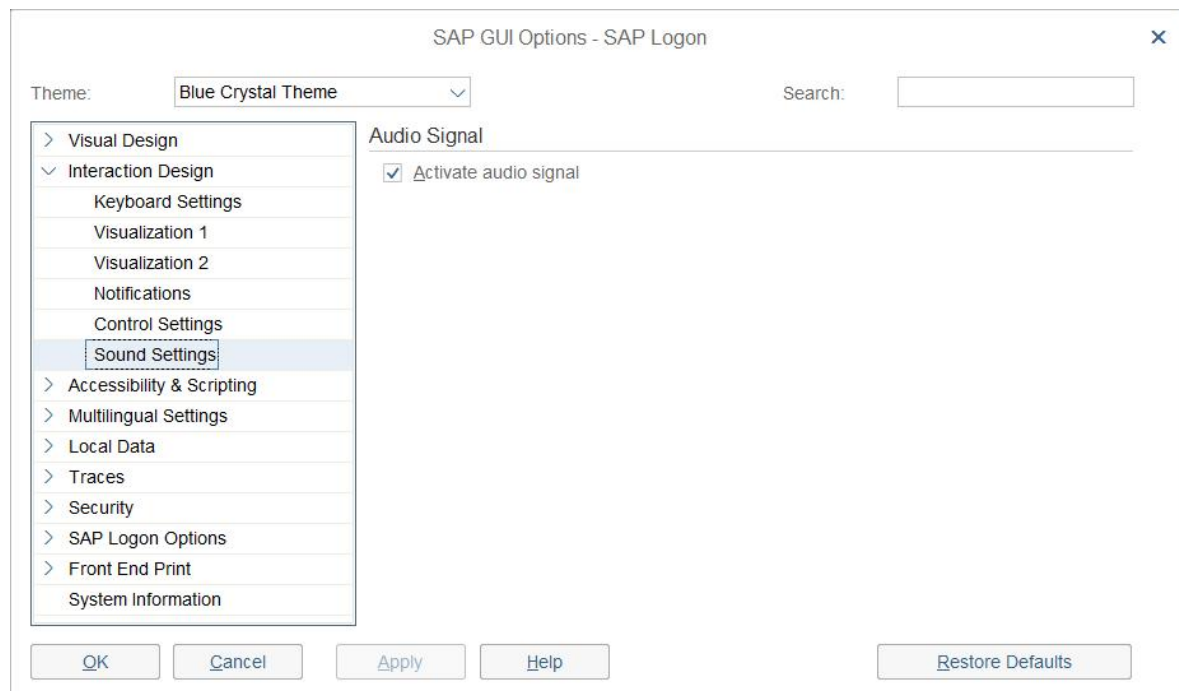


Registry Values

Activate Audio Feedback

[HKEY_CURRENT_USER\Software\SAP\General\Appearance]

"Sound" (REG_SZ) [Default: "On"] {"Off" = inactive; "On" = active }

7.2.18 Accessibility Page

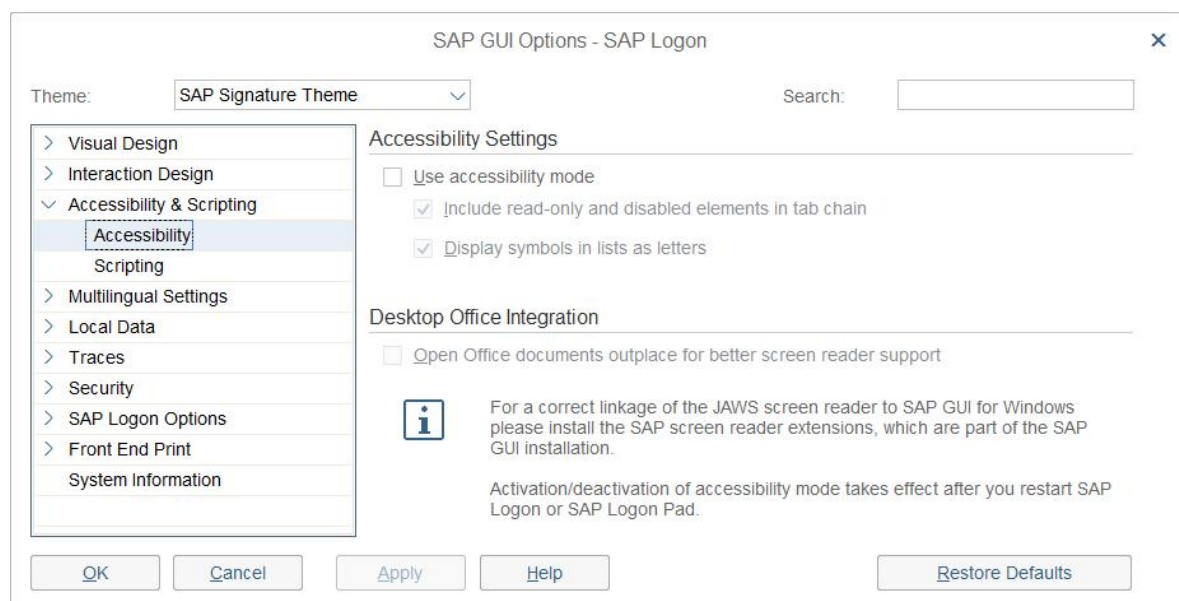

Registry Values

Use accessibility mode

[HKEY_CURRENT_USER\Software\SAP\General]

"AccMode" (REG_SZ) [Default: "Off"] {"Off" = inactive; "On" = active }



This option has to be activated to be able to activate the two options mentioned below.

Include read-only and disabled elements in tab chain

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Accessibility]

"EnhancedTabChain" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Display symbols in lists as letters

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Accessibility]

"SymbolsAsLetters" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Open Office documents outplace for better screen reader support

[HKEY_CURRENT_USER\Software\SAP\General]

"OfficeOutplaceMode" (REG_SZ) [Default: "off"] {"on" = active, "off" = inactive}

7.2.19 Scripting Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme

Search:

Installation

Scripting is installed

User Settings

☒ Enable scripting

☒ Notify when a script attaches to SAP GUI

☒ Notify when a script opens a connection

☐ Show native Microsoft Windows dialogs

OK Cancel Apply Help Restore Defaults

Registry Values



If SAP GUI Scripting is not installed, you see the corresponding message *Scripting is not installed* in the *Installation* field. If this is the case, the options below cannot be set. For more information on SAP GUI Scripting, see [SAP GUI Scripting Security Guide](#).

Registry Values Used in the SAP GUI Options Dialog

Enable Scripting

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Security]
 "UserScripting" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }



This option has to be activated to be able to activate the two options mentioned below.

Notify when a script attaches to SAP GUI

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Security]
 "WarnOnAttach" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Notify when a script opens a connection


[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Security]
 "WarnOnConnection" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

Show native MS Windows dialogs

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Scripting]
 "ShowNativeWinDlgs" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

For more information on this feature, see SAP note [1974590](https://www.sap.com/support/1974590).

7.2.20 IME Page

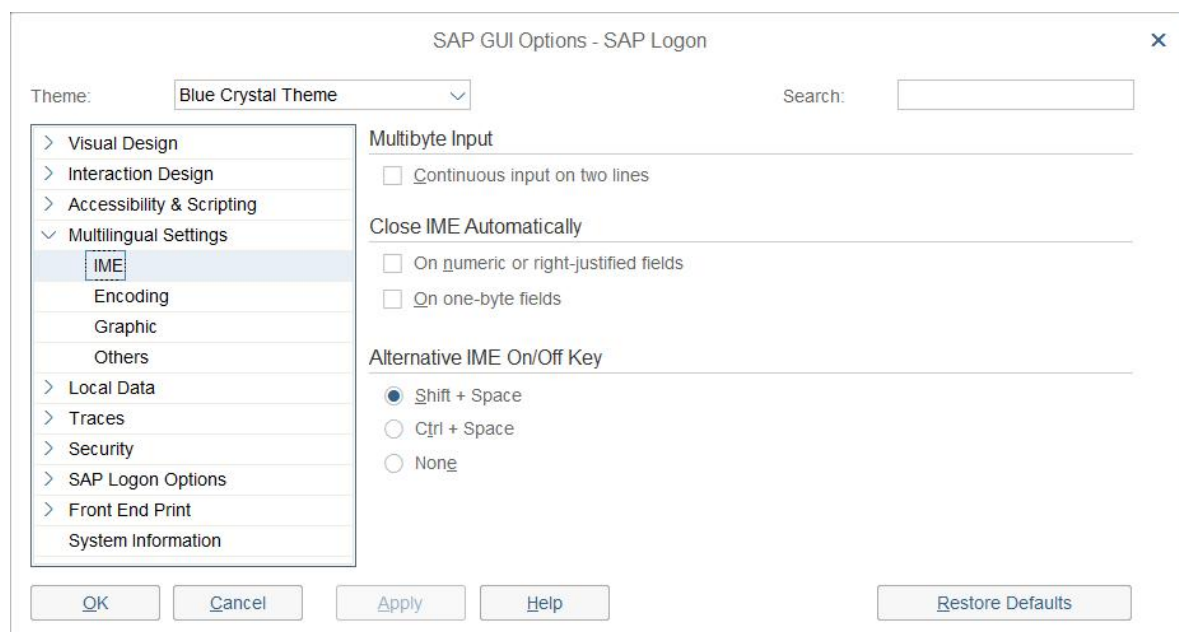**Registry Values****Continuous input on two lines**

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "KanjiContInput" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Close IME on numeric or right-justified fields


[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "ImeCloseRJustify" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Close IME on one-byte fields

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "ImeCloseOneByte" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Alternative IME on/off key

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "KanjiKey" (REG_DWORD) [Default: "0"] {0 = Shift + Space; 1 = Ctrl + Space; 2 = None }

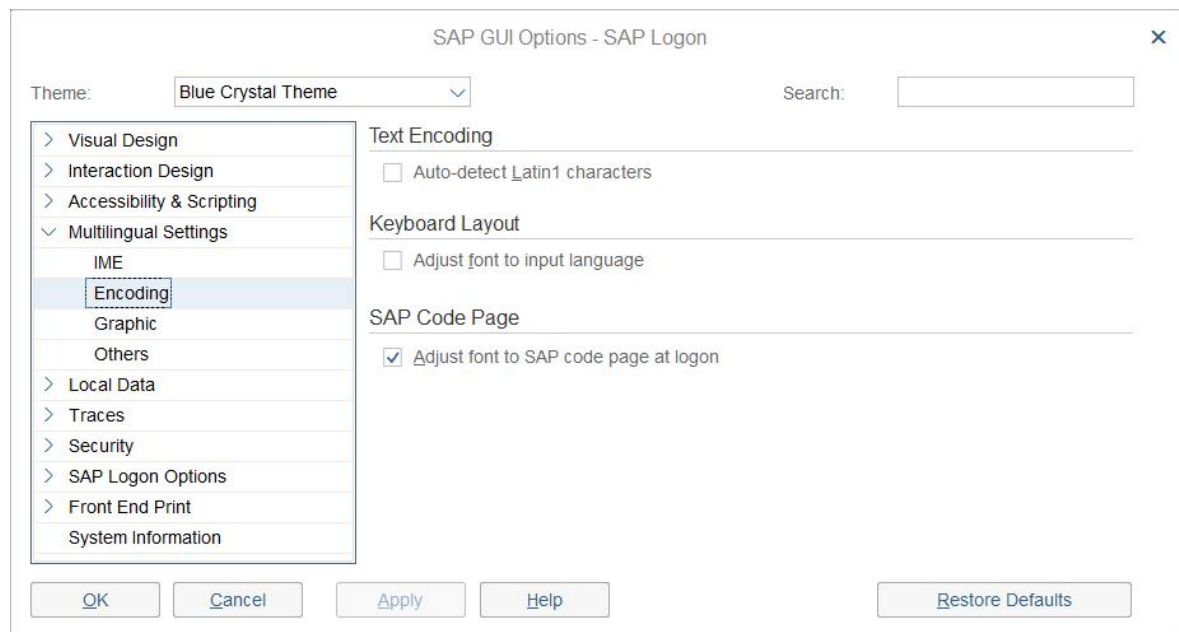7.2.21 Encoding Page**Registry Values****Auto-detect Latin1 characters**

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Latin1AutoDetect" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Adjust font to the input language

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "AdjustFontToKL" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Adjust font to SAP code page at logon

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "AdjustFontToSapCP" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

7.2.22 Graphic Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme

Search:

Visual Design

Interaction Design

Accessibility & Scripting

Multilingual Settings

IME

Encoding

Graphic

Others

Local Data

Traces

Security

SAP Logon Options

Front End Print

System Information

Text Font

☐ User setting

Small: [Select](#)

Medium: [Select](#)

Large: [Select](#)

Local Texts

Always use this language:

PostScript Font

Font File to Load (Env. PSFONTFILE)

[Browse...](#) [Clear](#)

Font Name (Env. PSFONTNAME)

[Change](#) [Clear](#)

[OK](#) [Cancel](#) [Apply](#) [Help](#) [Restore Defaults](#)

For this page, no values are stored in the registry, but in the SAP Graphics configuration file and environment variables.



Special handling for read-only feature:

To set the whole page read-only/changeable, create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI Front\SAP Frontend Server\Customize]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI Front\SAP Frontend Server\Customize] (on 32-Bit OS)

"GraphicsSettings_ReadOnly"

7.2.23 Others Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

Visual Design
Interaction Design
Accessibility & Scripting
Multilingual Settings
IME
Encoding
Graphic
Others
Local Data
Traces
Security
SAP Logon Options
Front End Print
System Information

Shortcut Key
☐ Hide shortcut key for multibyte menu

Function Code
☐ Do not send function code when IME is open

System Parameters
Menu Font: Segoe UI, 9 Select
Title Font: Segoe UI, 9 Select

Local Texts
☐ Use language setting of SAP Logon

RTL/LTR Layout
☒ Set layout in accordance with logon language

OK Cancel Apply Help Restore Defaults

Registry Values

Hide shortcut key for multibyte menu

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"KanjiHideShortcut" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

Do not send function code when IME is open

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"KanjiSuppressPFKey" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

System parameters

= Windows system parameters

Use SAP Logon language setting

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"UseSaplogonLang" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active }

RTL/LTR Layout - Set layout in accordance with the logon language

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
"BidirectOnLang" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active }

7.2.24 History Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme

Search:

History Status

☐ Off ☒ On ☐ Immediately

History Settings

Expiry Time [Month(s)]: 3

Maximum Permitted File Size [MB]: 10

Maximum Number of Entries: 20

Enable History for Fields Up To [Characters]: 59

Clear History

Directory for Input History:

C:\Users\vd034\AppData\Roaming\SAP\SAP GUI\History

Select

OK Cancel Apply Help Restore Defaults

Registry Values

History Status

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "ShowMode" (REG_DWORD) [Default: "1"] {0 = Off; 1 = on; 2 = Immediately }

Expiry Time

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "Expiration" (REG_DWORD) [Default: "3"] {0 - 1000}

Maximum Permitted File Size

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "FileSize" (REG_DWORD) [Default: "10"] {0 - 200}

Maximum Number of Entries

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "NoEntries" (REG_DWORD) [Default: "20"] {1 - 99}

Enable History for Fields up to [character]

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "FieldLenHistoryOn" (REG_DWORD) [Default: "59"] {1 - 255}

Directory for Input History

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]
 "DataPath" (REG_SZ) [Default: "C:\Users\<USERNAME>\AppData\Roaming\SAP\SAP GUI\History"] {valid path with write permission}



Different registry key/value under HKLM, which can be set via installation (for further information see Installation Guide):

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAP Shared]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAP Shared] (32 Bit OS)

“SAPhistorydir” (REG_EXPAND_SZ)

7.2.25 Cache Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

Local Cache

Maximum Cache Size [MB]: 10
Maximum Cache File Size [KB]: 1024

Directory for Local Cache Data:
C:\Users\ld034\AppData\Local\SAP\SAP GUI\Cache
[Delete Local Cache Files](#)

OK Cancel Apply Help Restore Defaults

Registry Values

Maximum Cache Size

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

“MaxCacheSize” (REG_DWORD) [Default: “10”] {0 – 10000 MB} Note : saved in Bytes not MB! à Default in Bytes: 10485760

Maximum Cache File Size

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

“MaxCacheFileSize” (REG_DWORD) [Default: “1024”] {0 – 10000 KB} Note : saved in Bytes not KB! à Default in Bytes: 1048576

7.2.26 File Lifetime Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

Visual Design
Interaction Design
Accessibility & Scripting
Multilingual Settings
Local Data
History
Cache
File Lifetime
Local Tab Order
Traces
Security
SAP Logon Options
Front End Print
System Information

Deletion of Files and Subfolders in Documents Folder

☒ Never
☐ Always during SAP Logon (Pad) shutdown
☐ File lifetime (date modified) [days]:

Directory for Documents: C:\Users\d034\Documents\SAP\SAP GUI

Open Documents Folder

Deletion of Files in Traces Folder

☒ Never
☐ Always during SAP Logon (Pad) shutdown
☐ File lifetime (date created) [days]:

Directory for Traces: C:\Users\d034\AppData\Local\SAP\SAP GUI\Traces\

Open Traces Folder

OK Cancel Apply Help Restore Defaults

Registry Values

Deletion of Files in Documents Folder

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

"DeleteDocuments" (REG_DWORD) [Default: "0"]

"DocumentLifetime" (REG_DWORD) [Default: "0"]

- Never ("DeleteDocuments" = 0 and "DocumentLifetime" = 0)
- Always during SAP Logon (Pad) shutdown ("DeleteDocuments" = 1 and "DocumentLifetime" = 0)
- File lifetime ("DeleteDocuments" = 1 and "DocumentLifetime" = {1 - 30})



- **Special handling for read-only feature:**

"Setting most options changeable and only some exceptions read-only":

It is enough to set one of the two registry values read-only, so that the radio buttons will be disabled.

"Setting most options read-only and exceptions changeable":

For both registry values a corresponding "*_ReadOnly" REG_DWORD registry value must be created and set to "0", so that the radio buttons will be enabled.

Deletion of Files in Traces Folder

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

"DeleteTraces" (REG_DWORD) [Default: "0"]

"TraceLifetime" (REG_DWORD) [Default: "0"]

- Never ("DeleteTraces" = 0 and "TraceLifetime" = 0)
- Always during SAP Logon (Pad) shutdown ("DeleteTraces" = 1 and "TraceLifetime" = 0)

7.2 Registry Values Used in the SAP GUI Options Dialog

- File lifetime (“DeleteTraces” = 1 and “TraceLifetime” = {1 - 30})



- Special handling for read-only feature:

“Setting most options changeable and only some exceptions read-only”:

It is enough to set one of the two registry values read-only, so that the radio buttons will be disabled.

“Setting most options read-only and exceptions changeable”:

For both registry values a corresponding “*_ReadOnly” REG_DWORD registry value must be created and set to “0”, so that the radio buttons will be enabled.

7.2.27 Local Tab Order Page

Registry Values

Directory for local tab order database

[HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

“LocalTabOrderPath” (REG_EXPAND_SZ) [Default: “%APPDATA%\SAP\SAP GUI\LocalTabOrder”] {valid path with write permission}



Special handling for read-only feature:

To enable/disable the button *Clear local tab order*, create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI Front\SAP Frontend Server\LocalData] (32 Bit OS)

“ClearLocalTabOrder_ReadOnly”

7.2.28 Session Traces Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme

Search:

> Visual Design
 > Interaction Design
 > Accessibility & Scripting
 > Multilingual Settings
 > Local Data
 > Traces
 Session Traces
 SAP GUI Traces
 SAP Logon Traces
 > Security
 > SAP Logon Options
 > Front End Print
 System Information

Session Trace

☐ Abap Editor
☐ Access Control
☐ Advanced Tree Control
☐ APOGrid
☐ Automation
☐ Border Painter Control
☐ Calendar
☐ Context Manager
☐ Control Manager
☐ Crystal Container
☐ Dialog Manager

☐ Time stamps
☐ Memory
☐ Detailed output

Select All Deselect All

Display Options

☐ Show window
☐ View on disable

Trace Folder: C:\Users\d034\AppData\Local\SAP\SAP GUI\Traces\

Enable Delete All Trace Files Open Trace Folder

Trace(s) are enabled/disabled in all new sessions.

OK Cancel Apply Help Restore Defaults

This page is only needed for error analysis and the creation of traces will only be triggered by SAP support employees. The SAP GUI security settings are independent of the read-only feature described below.



Special handling for read-only feature:

To set the whole page read-only/changeable create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI Front\SAP Frontend Server\Trace]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI Front\SAP Frontend Server\Trace] (on 32-Bit OS)

"SessionTrace_ReadOnly"

7.2.29 SAP GUI Traces Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme

Search:

> Visual Design
> Interaction Design
> Accessibility & Scripting
> Multilingual Settings
> Local Data
▼ Traces
 Session Traces
 SAP GUI Traces
 SAP Logon Traces
> Security
> SAP Logon Options
> Front End Print
System Information

SAP GUI Trace

☒ Trace deactivated
☐ Level 1: Errors
☐ Level 2: Errors and Warnings
☐ Level 3: All (Diagnostic Trace)

Delete All Trace Files Open Trace Folder

OK Cancel Apply Help Restore Defaults

This page is only needed for error analysis and creating traces will be only triggered by SAP support employees.



Special handling for read-only feature:

To set the radio buttons read-only/changeable create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI\Trace]
[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI\Trace] (on 32-Bit OS)
"Level_ReadOnly"

7.2.30 SAP Logon Traces Page

This page is only needed for error analysis and creating traces will be only triggered by SAP support employees.



Special handling for read-only feature:

To set the radio buttons read-only/changeable create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPLogon\Options]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPLogon\Options] (on 32-Bit OS)

"SapLogonTraceLevel_ReadOnly

7.2.31 Security Settings Page

How to disable and set security settings is described in the Security Guide.



7.2 Registry Values Used in the SAP GUI Options Dialog


Special handling for read-only feature:

To disable/enable editing, creating, deleting, and changing of the priority of user rules, create the following registry value:

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI Front\SAP Frontend Server\Security]

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI Front\SAP Frontend Server\Security] (on 32-Bit OS)
 "UserRuleEditing_ReadOnly"

7.2.32 SAP Logon Options - General Page

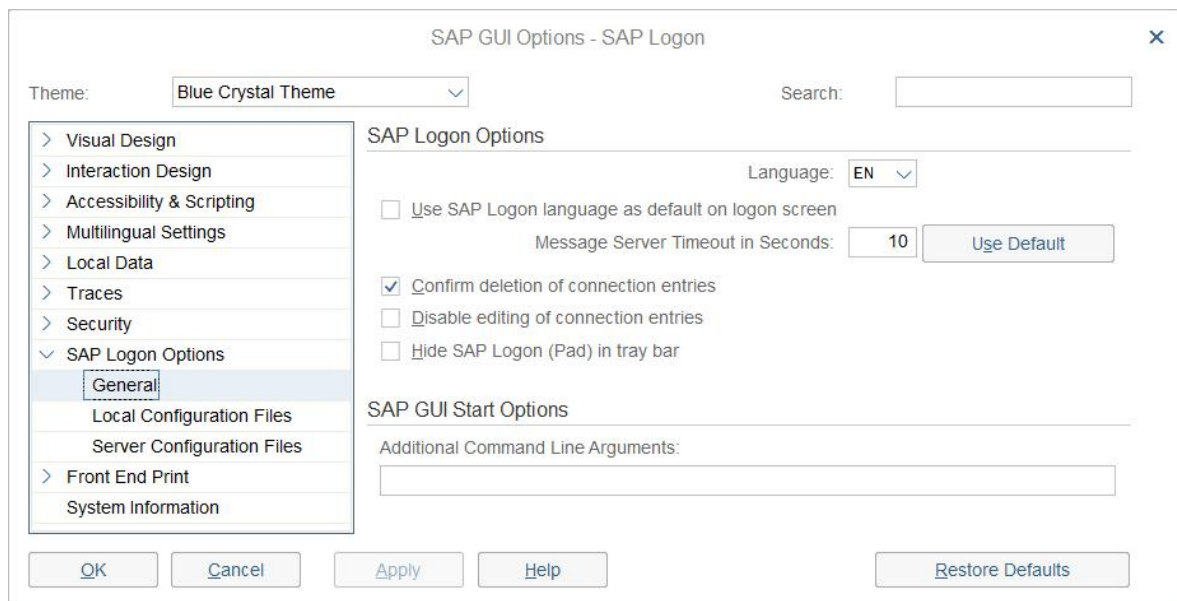**Registry Values****Language**

[HKEY_CURRENT_USER\Software\SAP\General]

"Language" (REG_SZ) [Default: OS default language] {two characters language shortcut: see the dropdown box in SAP GUI Options dialog}

Use SAP Logon language as default language on logon screen

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"UseSAPLogonLanguageAsDefault" (REG_DWORD) [Default: 1] { 0 = inactive; 1 = active}

You find more information on this feature under [Setting Logon Language](#).

Message Server Timeout

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"MessageServerTimeout" (REG_DWORD) [Default: "10"]

Confirm deletion of connection entries

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"ConfirmDelete" (REG_DWORD) [Default: "1"] {0 = inactive; 1 = active}

Disable editing of connection entries

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"NoEditFunctionality" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

Hide SAP Logon (Pad) to tray bar

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"HideToTrayBar" (REG_DWORD) [Default: "0"] {0 = inactive; 1 = active}

SAP GUI Start Options – Additional Command Line Arguments

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"SapguiNTCmdOpts" (REG_SZ) [Default: ""] {valid SAP GUI command line argument(s)}



Note the reading priority for these registry values (except for *Language*):

- SAP Logon: HKCU à HKLM
- SAP Logon Pad: HKLM à HKCU

7.2.33 Local Configuration Files Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

Local

Path of Local Configuration Files: C:\Users\d034\AppData\Roaming\SAP\Common Select

Loaded Local Files

Type	Path
Local File	C:\Users\d034\AppData\Roaming\SAP\Common\SAPUILandscape.xml

i The change takes effect after you restart SAP Logon/SAP Logon Pad.

OK Cancel Apply Help Restore Defaults

Registry Values**Path of Local Configuration Files**

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

"PathConfigFilesLocal" (REG_EXPAND_SZ) [Default: "%APPDATA%\SAP\Common"] {valid path with write access}



Note the reading priority for these registry values:

- SAP Logon: HKCU à HKLM
- SAP Logon Pad: HKLM à HKCU

7.2.34 Server Configuration Files Page

SAP GUI Options - SAP Logon

Theme: Blue Crystal Theme Search:

Visual Design
Interaction Design
Accessibility & Scripting
Multilingual Settings
Local Data
Traces
Security
SAP Logon Options
General
Local Configuration Files
Server Configuration Files
Front End Print
System Information

Server

XML Configuration File on Server:
http://cmp.wdf.sap.corp:1080/sesi_services/lcp_file.xml

☒ Allow caching of server configuration files

☒ Update cache on every SAP Logon (Pad) start

☐ Update cache only in an interval of [hours]:

Path for Caching:
C:\Users\d034\AppData\Roaming\SAP\LogonServerConfigCache

Loaded Server Files

Type	Path
Server File	http://cmp.wdf.sap.corp:1080/sesi_services/lcp_file.xml

OK Cancel Apply Help Restore Defaults

Registry Values

XML Configuration File on Server

Depending on the configuration of your landscape, different file paths are displayed here, **if they are not overwritten by the user**:

Configuration with INI files (SAP UI Landscape inactive; LandscapeFormatEnabled not set)

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

“ConfigFileOnServer” (REG_EXPAND_SZ) [Default: “”] {valid path to the correct configured XML-File}

SAP UI Landscape active (default setting; registry key LandscapeFormatEnabled is set)

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPLogon\Options]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPLogon\Options] (on 64-Bit OS)

“LandscapeFileOnServer” (REG_EXPAND_SZ) [Default: “”] {valid path to the correct configured XML-File}

Or if you have created a **core configuration file** that can be supplied and set only by an administrator and not by the users:

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPLogon\Options] (32-Bit OS)

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPLogon\Options] (64-Bit OS)

Registry Values Used in the SAP GUI Options Dialog

“CoreLandscapeFileOnServer” (REG_EXPAND_SZ) [Default: “”]

For more information on the configuration with or without SAP UI Landscape, see the SAP GUI for Windows Installation Guide, chapter 2 ‘Configuration Information’.

Allow caching of server configuration files

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

“AllowCachingServerConfigFiles” (REG_DWORD) [Default: “1”] {0 = inactive; 1 = active}



The term *server configuration files* refers to the SAP UI Landscape file as well as to the core configuration file.

Update cache... (Note: These options are only available if SAP UI Landscape format is enabled!)

[HKEY_CURRENT_USER\Software\SAP\SAPLogon\Options]

“LandscapeCacheExpiryPeriod” (REG_DWORD) [Default: “0”] {0 = update on every SAP Logon (Pad) start; [60, 599940] = interval in minutes}

You find more information on the caching features in the *SAP GUI Frontend Installation Guide* in section *Caching Server Configuration Files*.



Note the reading priority for these registry values:


- SAP Logon: HKCU à HKLM
- SAP Logon Pad: HKLM à HKCU

Loaded Server Files

In this window pane, type and path of the loaded server files are displayed.

Type	Description
Server file	This file type is displayed in two cases: · „CoreLandscapeFileOnServer“ und „LandscapeFileOnServer“ are set; „LandscapeFileOnServer“ overrules the other setting · only „LandscapeFileOnServer“ is set
General File	Only „CoreLandscapeFileOnServer“ is set.
Include File	In case there are several include entries in the landscape XML file.

7.2.35 Frontend Print Settings Page

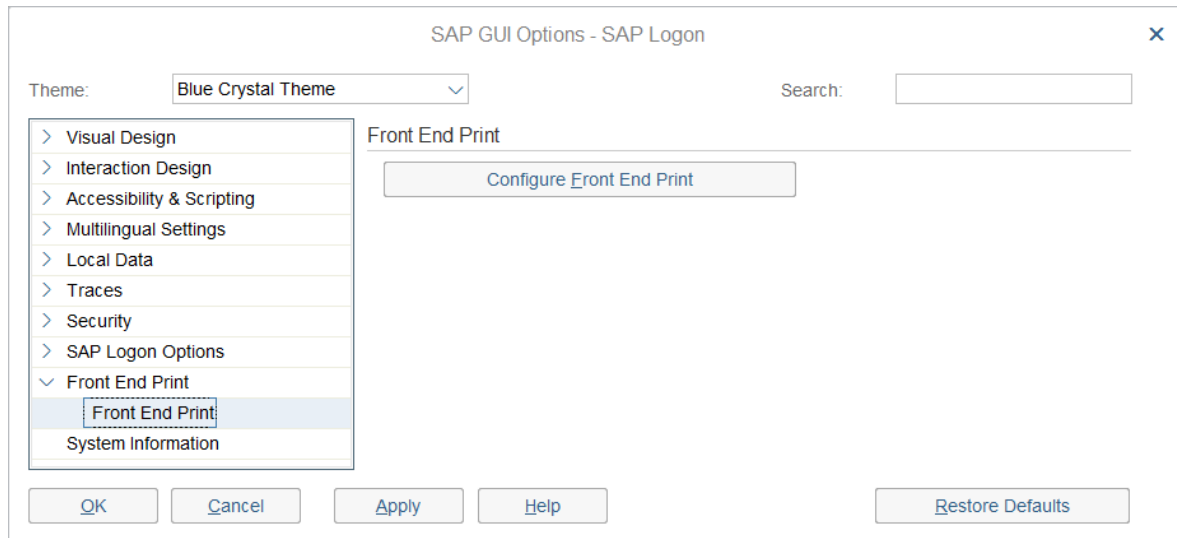

To configure front end printing, choose *Configure Front End Print*. This leads you to the print options editor. You find more information in the print options help or in [note 1149136](#).



Special handling for read-only feature:

The *Configure Front End Print* button is read-only by default. To view the frontend print options, you have to activate this button fvia the keys listed below. Note that to do this, you have to switch to another mode of the read-only feature (see section 2 of chapter [Read-Only Feature of the SAP GUI Options Dialog](#)):


[HKEY_LOCAL_MACHINE\Wow6432Node\Software\SAP\General\Appearance]

[HKEY_LOCAL_MACHINE\Software\SAP\General\Appearance] (on 32 Bit OS)

"FrontEndPrint_ReadOnly" (REG_DWORD)

8 Registry Values of SAP GUI in General

8.1 Displaying OK Code Field and Status Bar Info

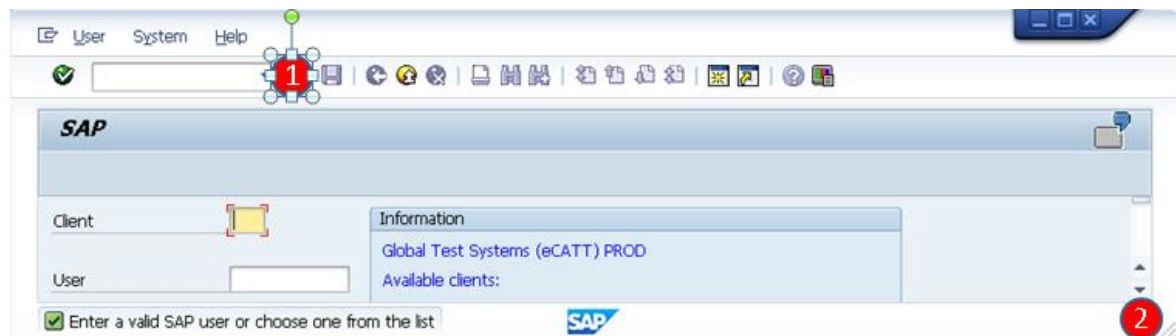

Registry Values

- 1 **OK field opened**
 [HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "HideCmdLinePermanently" (REG_DWORD)) [Default: "0"]
 {0 = OKCode field opened; 1 = OKCode field closed}
- 2 **Display Status Bar Info**
 [HKEY_CURRENT_USER\Software\SAP\SAPGUI Front\SAP Frontend Server\Customize]
 "Statusbar.Layout" (REG_DWORD)) [Default: "1"]
 {0 = inactive; 1 = active}

8.2 Disabling Input History via Registry

You have the possibility to completely disable the input history via registry. The history database will not be created in this case.

Registry Values

To disable history, set the DWORD registry value "**DisableHistory**" to 1 either under HKEY_LOCAL_MACHINE or under HKEY_CURRENT_USER in the LocalData location:
software\sap\SAPGUI Front\SAP Frontend Server\LocalData.



On 64bit operating systems, the value under HKEY_LOCAL_MACHINE needs to be placed under:

HKEY_LOCAL_MACHINE\software\Wow6432Node\sap\SAPGUI Front\SAP Frontend Server\LocalData.

The reading order is as follows:

First, the registry value will be checked under HKEY_LOCAL_MACHINE. If not defined there, the registry value will be checked under HKEY_CURRENT_USER.

8.3 Disabling/Setting Read-Only the Local Tab Order via Registry

You have the possibility to completely disable the local tab order functionality via registry or to set it read-only.

Registry Values

[HKEY_LOCAL_MACHINE\SOFTWARE\SAP\SAPGUI Front\SAP Frontend Server\LocalData]

[HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\SAP\SAPGUI Front\SAP Frontend Server\LocalData] on 64bit operating systems

"DisableLocalTabChain" (=1 means local tab order disabled)

"LocalTabOrderReadOnly" (=1 means local tab order read-only)

9 Appendix

9.1 Related Information

Source	Location
SCN	https://www.sap.com/community/topic/gui.html Community Wiki

9.2 Registry Keys Overview

The following registry key overview contains the registry keys as titles and the registry key data in the table following the title.

9.2.1 Software\SAP\General

Value	Type	Default	Reading Priority	Chapter/ Reference
AccMode	REG_SZ	Off	HKCU -> HKLM	Accessibility page
AllOptionsReadOnly	REG_DWORD	See ref.	See ref.	Read-Only Feature of the SAP GUI Options Dialog
CurRegValReadOnlyActive	REG_DWORD	See ref.	See ref.	Read-Only Feature of the SAP GUI Options Dialog
Language	REG_SZ	OS default language	HKCU -> HKLM	SAP Logon Options - General Page
OfficeOutplaceMode	REG_SZ	Off	HKCU -> HKLM	SAP Logon Options - Accessibility Page
SAPDockAllowMoveSave	REG_DWORD	0	HKCU -> HKLM	Control Settings page
SAPGUIControlPlugin	REG_DWORD	0	HKCU -> HKLM	Control Settings Page

9.2.2 Software\SAP\General\Appearance

Value	Type	Default	Reading Priority	Chapter/ Reference
AccClassicMenubarBehaviorActive	REG_DWORD	1	HKCU -> HKLM	SAP Note 1515235

Registry Keys Overview

AcceptFioriTheme	REG_DWORD	1	HKCU -> HKLM	Theme Preview/Settings Page
AdjustFontHeightToDPI	REG_DWORD	1	HKCU -> HKLM	SAP Note 2106323
AnimatedFocus	REG_DWORD	1	HKCU -> HKLM	Theme Preview/Settings page
BlueCrystalDefaultColor	REG_SZ	„	HKCU -> HKLM	SAP GUI Default Color for SAP Signature and Blue Crystal Design
BrandingImage	REG_SZ	none	HKCU -> HKLM	Branding Page
BrandingImage_ReadOnly	REG_DWORD	0	only HKLM	Branding Page
Corbulcon	REG_DWORD	0	HKCU -> HKLM	Theme Preview/Settings page
EllipsisForI18n	REG_DWORD	0	HKCU -> HKLM	Visualization 2 page
FrontEndPrint_ReadOnly	REG_DWORD	0	Only HKLM	Frontend Print Settings Page
High Contrast Theme	REG_DWORD	0	HKCU -> HKLM	Theme Preview/Settings page
LunarFollowFocusMenuActive	REG_DWORD	0	HKCU -> HKLM	SAP Note 1552357
RestoreDefaults_ReadOnly	REG_DWORD	0	HKLM	Restore Defaults Button
SelectedTheme	REG_DWORD	1	HKCU -> HKLM	Theme Preview/Settings Page
ShowShadowBorder	REG_DWORD	1	HKCU -> HKLM	Theme Preview/Settings page
SignatureDefaultColor	REG_SZ	“”	HKCU -> HKLM	Color Settings page
SignatureSystemDependentColorsActive	REG_DWORD	1	HKCU -> HKLM	Color Settings page
Sound	REG_SZ	On	HKCU -> HKLM	Sound Settings page
UseBrandingImage	REG_DWORD	0	HKCU -> HKLM	Branding Page
UseBrandingImage_ReadOnly	REG_DWORD	1	HKCU -> HKLM	Branding Page
UseGuiHelpOnly	REG_SZ	Off	Only HKLM	SAP Note 694583

9.2 Registry Keys Overview

9.2.3 Software\SAP\General\Appearance\Systems

Value	Type	Default	Reading Priority	Chapter/ Reference
ColorsSystemSpecific_Readonly	REG_DWORD	0	HKLM	Colors in System Page

9.2.4 Software\SAP\General\Appearance\Systems\SID

Value	Type	Default	Reading Priority	Chapter/ Reference
ActiveColorSetting	REG_SZ	Registry key and value do not exist	HKCU -> HKLM	Enjoy Design: Color in System page
Theme	REG_SZ	Registry key and value do not exist	HKCU -> HKLM	Colors in System Page Enjoy Design Color in System Page
ThemeNameBC	REG_SZ	Registry key and value do not exist	HKCU -> HKLM	Colors in System Page

9.2.5 Software\SAP\General\Appearance\Systems\SID\Client_NO

Value	Type	Default	Reading Priority	Chapter/ Reference
ThemeName	REG_SZ	Registry key and value do not exist	HKCU -> HKLM	Colors in System Page
ThemeNameBC	REG_SZ	Registry key and value do not exist	HKCU -> HKLM	Colors in System Page

9.2.6 SOFTWARE\SAP\General\Appearance\Themes

Value	Type	Default	Reading Priority	Chapter/ Reference
SelectableThemes	REG_DWORD	0x7F	only HKLM	Theme Preview/Settings page
ThemesCustomize_ReadOnly	REG_DWORD	0	only HKLM	Enjoy Design Color Setting Page

9.2.7 Software\SAP\General\Applications\<application>

Value	Type	Default	Reading Priority	Chapter/ Reference
AppsSapGuiVisualTheme_ReadOnly	REG_DWORD	0	only HKLM	Applications Page
Enjoy	REG_SZ	On	HKCU -> HKLM?	Applications Page
MouseFollowFocus	REG_DWORD	0	HKCU -> HKLM	Keyboard Settings page

9.2.8 Software\SAP\General\ControlServices\WebSearchEngine

Value	Type	Default	Reading Priority	Chapter/ Reference
WebSearchEngine	REG_SZ	Google	HKCU -> HKLM	Control Settings page

9.2.9 Software\SAP\General\Customer Colors

Value	Type	Default	Reading Priority	Chapter/ Reference
CustomColors_ReadOnly	REG_DWORD	0	only HKLM	Define Custom Colors

9.2.10 Software\SAP\General\Customer Colors\Custom Color 1

Value	Type	Default	Reading Priority	Chapter/ Reference
Hue	REG_DWORD	No default -> value must exist	HKCU -> HKLM	Define Custom Colors

9.2.11 Software\SAP\SAP Shared

Value	Type	Default	Reading Priority	Chapter/ Reference
SAPhistoryDir	REG_SZ_EXPAND	See ref.	only HKLM	Roaming User Application Directory History Page
SAPWorkDir	REG_SZ_EXPAND	See ref.	only HKLM	Roaming User Application Directory Chapter

9.2 Registry Keys Overview

9.2.12 Software\SAP\SAPGUI

Value	Type	Default	Reading Priority	Chapter/ Reference
DelegationMode	REG_DWORD	0	HKCU -> HKLM	SAP Note 844095
StartSaplogon	REG_DWORD	1	HKLM -> HKCU	SAP Note 552646
NoDelegate	REG_DWORD	0	Only HKLM	SAP Note 844095

9.2.13 Software\SAP\SAPGUI Front\SAP Frontend
Server\Accessibility

Value	Type	Default	Reading Priority	Chapter/ Reference
EnhancedTabChain	REG_DWORD	1	HKCU -> HKLM	Accessibility page
SymbolAsLetters	REG_DWORD	1	HKCU -> HKLM	Accessibility page

9.2.14 Software\SAP\SAPGUI Front\SAP Frontend
Server\Administration

Value	Type	Default	Reading Priority	Chapter/ Reference
DisappearItems	REG_SZ	1	only HKLM	SAP Note 338750
ShowAdditionalTitleInfo	REG_DWORD	0	HKCU -> HKLM	Visualization 2 Page

9.2.15 Software\SAP\SAPGUI Front\SAP Frontend
Server\Customize

Value	Type	Default	Reading Priority	Chapter/ Reference
AdjustFontToKL	REG_DWORD	0	HKCU -> HKLM	Encoding page
AdjustFontToSapCP	REG_DWORD	1	HKCU -> HKLM	Encoding page
Automation.MessagePendingDelay	REG_DWORD	8 seconds	HKCU -> HKLM	SAP Note 87585
Automation.RetryReply	REG_DWORD	10 seconds	HKCU -> HKLM	SAP Note 87585
AutoTAB	REG_DWORD	0	HKCU -> HKLM	Keyboard Settings page
BeepError	REG_DWORD	0	HKCU ->	Notifications

Registry Keys Overview

			HKLM	page
Belize.Font.Height	REG_DWORD	"0xffffffff2" == "-14"	HKCU -> HKLM	Font Settings page
Belize.Font.Width	REG_DWORD	0	HKCU -> HKLM	Font Settings page
Belize.Font.Facename	REG_SZ	Depends on the set charset	HKCU -> HKLM	Font Settings page
Belize.Prop.Height	REG_DWORD	"0xffffffff2" == "-14"	HKCU -> HKLM	Font Settings page
Belize.Prop.Width	REG_DWORD	0	HKCU -> HKLM	Font Settings page
Belize.Prop.Facename	REG_SZ	Depends on the set charset	HKCU -> HKLM	Font Settings page
BidirectOnLang	REG_DWORD	1	HKCU -> HKLM	Others page
BubbleDelay	REG_DWORD	1	HKCU -> HKLM	Notifications page
BubbleOnTab	REG_DWORD	0	HKCU -> HKLM	Notifications page
Buttonbar	REG_DWORD	1	HKCU -> HKLM	Classic Design: Options page
CheckDynproSize	REG_DWORD	0	HKCU -> HKLM	SAP Note 570861
ColorScheme	REG_DWORD	0	HKCU -> HKLM	Classic Design: Options page
DbIClkForF2	REG_DWORD	1	HKCU -> HKLM	SAP Note 1672400
Dropdown.KeyboardDelay_ms	REG_DWORD	1000 milliseconds	HKCU -> HKLM	SAP Note 352130
Dropdown.ShowKey	REG_DWORD	0	HKCU -> HKLM	Visualization 1 page
Dropdown.SortKey	REG_DWORD	0	HKCU -> HKLM	Visualization 1 page
Edit.BlockCursor	REG_DWORD	0	HKCU -> HKLM	Visualization 1 page
Edit.CaretWidth	REG_DWORD	2	HKCU -> HKLM	Visualization 1 page
Edit.EnterFieldSelectAll	REG_DWORD	1	HKCU -> HKLM	Keyboard Settings page
EnhancedSearchMode	REG_DWORD	1	HKCU -> HKLM	Visualization 2 Page
Font.CharSet	REG_DWORD	Set system	HKCU ->	Font Settings

9.2 Registry Keys Overview

		charset or 0	HKLM	page
Font.FaceName	REG_SZ	Depends on the set charset	HKCU -> HKLM	Font Settings page
Font.Height	REG_DWORD	15	HKCU -> HKLM	Font Settings page
Font.Width	REG_DWORD	0	HKCU -> HKLM	Font Settings page
GraphicSettings_ReadOnly	REG_DWORD	0	only HKLM	Graphic Page
HideCmdLineInPlace	REG_DWORD	0	HKCU -> HKLM	SAP Note 648452
HideCmdLineInPlaceAllSession	REG_DWORD	0	HKCU -> HKLM	SAP Note 648452
HideCmdLinePermanently	REG_DWORD	0	HKCU -> HKLM	Displaying OK Code Field and Status Bar Info
ImeCloseOneByte	REG_DWORD	0	HKCU -> HKLM	IME page
ImeCloseRJustify	REG_DWORD	0	HKCU -> HKLM	IME page
KanjiContInput	REG_DWORD	0	HKCU -> HKLM	IME page
KanjiFontDialogProp	REG_DWORD	0	HKCU -> HKLM	Font Settings page
KanjiFontDialogScript	REG_DWORD	0	HKCU -> HKLM	Font Settings page
KanjiHideShortcut	REG_DWORD	0	HKCU -> HKLM	Others page
KanjiKey	REG_DWORD	0	HKCU -> HKLM	IME page
KanjiSuppressPFKey	REG_DWORD	0	HKCU -> HKLM	Others page
Latin1AutoDetect	REG_DWORD	0	HKCU -> HKLM	Encoding page
ListAllowClearType	REG_DWORD	1	HKCU -> HKLM	Visualization 1 page
ListCursor	REG_DWORD	1	HKCU -> HKLM	Visualization 1 page
ListEffect	REG_DWORD	1	HKCU -> HKLM	Classic Design: Color in Forms page
ListLines	REG_DWORD	1	HKCU -> HKLM	Visualization 1 page
PopupBatchIn	REG_DWORD	1	HKCU -> HKLM	Visualization 1 page

Registry Keys Overview

PopupError	REG_DWORD	0	HKCU -> HKLM	Notifications page
PopupSuccess	REG_DWORD	0	HKCU -> HKLM	Notifications page
PopupWarning	REG_DWORD	0	HKCU -> HKLM	Notifications page
PositionMouse	REG_DWORD	1	HKCU -> HKLM	Keyboard Settings page
PositionTAB	REG_DWORD	1	HKCU -> HKLM	Keyboard Settings page
Prop.CharSet	REG_DWORD	Set system charset or 0	HKCU -> HKLM	Font Settings page
Prop.FaceName	REG_DWORD	Depends on the set charset	HKCU -> HKLM	Font Settings page
Prop.Height	REG_DWORD	15	HKCU -> HKLM	Font Settings page
Prop.Width	REG_DWORD	0	HKCU -> HKLM	Font Settings page
ScrollDelay	REG_DWORD	0	HKCU -> HKLM	SAP Note 740052
Shadow	REG_DWORD	1	HKCU -> HKLM	Classic Design: Color in Forms page
ShowAdditionalTitleInfo	REG_DWORD	0	HKCU -> HKLM	Visualization 2 page
Simulate Workplace	REG_DWORD	1000	HKCU -> HKLM	SAP Note 352130
Statusbar	REG_DWORD	1	HKCU -> HKLM	Classic Design: Options page
Statusbar.Layout	REG_DWORD	1	HKCU -> HKLM	Displaying OK Code Field and Status Bar Info
Toolbar	REG_DWORD	1	HKCU -> HKLM	Classic Design: Options page
Toolbar.RegularButtons	REG_DWORD	0	HKCU -> HKLM	Classic Design: Options page
UnderlineHotspot	REG_DWORD	0	HKCU -> HKLM	Visualization 1 page
UseClientAccesskeys	REG_DWORD	AccMode enabled -> 1 otherwise 0	HKCU -> HKLM	Keyboard Settings page
UseSaplogonLang	REG_DWORD	0	HKCU -> HKLM	Others page

9.2.16 Software\SAP\SAPGUI Front\SAP Frontend Server\LocalData

Value	Type	Default	Reading Priority	Chapter/Reference
ClearLocalTabOrder_ReadOnly	REG_DWORD	0	only HKLM	Local Tab Order Page
DataPath	REG_SZ	%APPDATA%\SAP\SAPGUI\History	HKCU --> HKLM	History Page
DeleteDocuments	REG_DWORD	0	HKCU --> HKLM	File Lifetime Page
DeleteTraces	REG_DWORD	0	HKCU --> HKLM	File Lifetime Page
DisableHistory	REG_DWORD	0	HKLM à HKCU	SAP Note 925639 or Disabling Input History via Registry
DisableLocalTabChain	REG_DWORD	0	only HKLM	Disabling/Setting Read-Only the Local Tab Order via Registry
DocumentLifetime	REG_DWORD	0	HKCU --> HKLM	File Lifetime Page
Expiration	REG_DWORD	3	HKCU --> HKLM	History Page
FieldLenHistoryOn	REG_DWORD	59	HKCU --> HKLM	History Page
FileSize	REG_DWORD	10	HKCU --> HKLM	History Page
LocalTabOrderPath	REG_EXPAND_SZ	%APPDATA%\SAP\SAPGUI\LocalTabOrder	HKCU --> HKLM	Local Tab Order Page
LocalTabOrderReadOnly	REG_DWORD	0	only HKLM	Disabling/Setting Read-Only the Local Tab Order via Registry
MaxCacheFileSize	REG_DWORD	1024	HKCU --> HKLM	Cache Page
MaxCacheSize	REG_DWORD	10	HKCU --> HKLM	Cache Page
NoEntries	REG_DWORD	20	HKCU --> HKLM	History Page
ShowMode	REG_DWORD	1	HKCU -->	History Page

			HKLM	
TraceLifetime	REG_DWORD	0	HKCU --> HKLM	File Lifetime Page
UseDot	REG_DWORD	0	HKCU --> HKLM	SAP Note 867131

9.2.17 Software\SAP\SAPGUI Front\SAP Frontend Server\Palette

Value	Type	Default	Reading Priority	Chapter/Reference
Edit.BgndBrush	REG_SZ	"255 255 255"	HKCU --> HKLM	Classic Design – Color in Forms Page
Edit.FocusBrush	REG_SZ	"255 255 255"	HKCU --> HKLM	Classic Design – Color in Forms Page
Edit.TextInt	REG_SZ	"255 0 0"	HKCU --> HKLM	Classic Design – Color in Forms Page
Edit.TextNorm	REG_SZ	"0 0 0"	HKCU --> HKLM	Classic Design – Color in Forms Page
Frame.BgndBrush	REG_SZ	Same value as "Read.BgndBrush"	HKCU --> HKLM	Classic Design – Color in Forms Page
IntensiveColor1 Till	REG_SZ	"125 166 207"	HKCU --> HKLM	Classic Design – Color in Lists Page
IntensiveColor7	REG_SZ	"196 150 207"		
IntensiveText1 Till	REG_SZ	"0 0 0"	HKCU --> HKLM	Classic Design – Color in Lists Page
IntensiveText7	REG_SZ	"0 0 0"		
InverseColor1 Till	REG_SZ	"192 192 192"	HKCU --> HKLM	Classic Design – Color in Lists Page
InverseColor7	REG_SZ	"192 192 192"		
InverseText1 Till	REG_SZ	"0 0 255"	HKCU --> HKLM	Classic Design – Color in Lists Page
InverseText7	REG_SZ	"204 0 204"		
NormalColor1 till	REG_SZ	"255 128 128"	HKCU --> HKLM	Classic Design – Color in Lists Page
NormalColor7	REG_SZ	"227 199 235"		
NormalText1 Till	REG_SZ	"0 0 0"	HKCU --> HKLM	Classic Design – Color in Lists Page
NormalText7	REG_SZ	"0 0 0"		
Palette	REG_DWORD	0	HKCU --> HKLM	Classic Design – Color in Forms

9.2 Registry Keys Overview

				Page
Read.BgndBrush	REG_SZ	System- defined value for “Face color for three-dimensional display elements and for dialog box backgrounds	HKCU --> HKLM	Classic Design – Color in Forms Page
Read.FocusBrush	REG_SZ	Same value as “Read.BgndBrush”	HKCU --> HKLM	Classic Design – Color in Forms Page
Read.TextInt	REG_SZ	“255 0 0”	HKCU --> HKLM	Classic Design – Color in Forms Page
Read.TextNorm	REG_SZ	“0 0 0”	HKCU --> HKLM	Classic Design – Color in Forms Page
Static.TextInt	REG_SZ	“255 0 0”	HKCU --> HKLM	Classic Design – Color in Forms Page
Static.TextNorm	REG_SZ	“0 0 0”	HKCU --> HKLM	Classic Design – Color in Forms Page
View.BgndBrush	REG_SZ	Same value as “Read.BgndBrush”	HKCU --> HKLM	Classic Design – Color in Forms Page

9.2.18 Software\SAP\SAPGUI Front\SAP Frontend Server\ReleaseDebug

Value	Type	Default	Reading Priority	Chapter/ Reference
Debug.Hotkeys	REG_DWORD	0	HKCU --> HKLM	SAP Note 422044
UnhandledExceptionsOnly	REG_DWORD	1	only HKCU	SAP Note 559285

9.2.19 Software\SAP\SAPGUI Front\SAP Frontend Server\ReleaseDebug\ShowBorders

Value	Type	Default	Reading Priority	Chapter/ Reference
CMyManager.ShowBorders	REG_DWORD	0	HKCU --> HKLM	SAP Note 324687
CMyManager.ShowNames	REG_DWORD	0	HKCU --> HKLM	SAP Note 324687
ENABLED	REG_DWORD	0	HKCU --> HKLM	SAP Note 324687

SHOW_ALL	REG_DWORD	1	HKCU --> HKLM	SAP Note 324687
----------	-----------	---	------------------	---------------------------------

9.2.20 Software\SAP\SAPGUI Front\SAP Frontend Server\SapChart

Value	Type	Default	Reading Priority	Chapter/ Reference
Mirror	REG_DWORD	0	HKCU --> HKLM	SAP Note 1287485

9.2.21 Software\SAP\SAPGUI Front\SAP Frontend Server\Scripting

Value	Type	Default	Reading Priority	Chapter/ Reference
DisableWriteToDisk	REG_DWORD	0	Only HKLM	SAP Note 867260
SetSapWorkDirOnOpenConn	REG_DWORD	1	HKCU --> HKLM	SAP Note 1270130
Virgo	REG_DWORD	1	HKCU --> HKLM	SAP Note 1139539
WaitForResponse1	REG_DWORD	1	HKCU --> HKLM	SAP Note 867619

9.2.22 Software\SAP\SAPGUI Front\SAP Frontend Server\Security

Value	Type	Default	Reading Priority	Chapter/ Reference
ActivateLogging	REG_DWORD	0	Only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
Configuration	REG_DWORD	1	Only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
DefaultAction	REG_DWORD	1	Only HKLM	Security Guide

9.2 Registry Keys Overview

				SAP GUI for Windows: "Central Repository for Security Configuration" chapter
DisplayNotifications	REG_DWORD	1	Only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
DP.KeepAlive	REG_DWORD	0	only HKLM	SAP Note 701618
InitSaveDir	REG_EXPAND_SZ	none	only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
Location	REG_EXPAND_SZ	none	only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
LoggingDestinationDir	REG_EXPAND_SZ	none	only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
SecurityLevel	REG_DWORD	1	Only HKLM	Security Guide SAP GUI for Windows: "Central Repository for Security Configuration" chapter
UserRuleEditing_ReadOnly	REG_DWORD	0	only HKLM	Security Settings

				Page
UserScripting	REG_DWORD	1	HKCU --> HKLM	Scripting Page
WarnOnAttach	REG_DWORD	1	HKCU --> HKLM	Scripting Page
WarnOnConnection	REG_DWORD	1	HKCU --> HKLM	Scripting Page

9.2.23 Software\SAP\SAPGUI Front\SAP Frontend Server\Splitter

Value	Type	Default	Reading Priority	Chapter/ Reference
NewSplitter	REG_DWORD	1	HKCU --> HKLM	SAP Note 676532

9.2.24 Software\SAP\SAPGUI Front\SAP Frontend Server\Trace

Value	Type	Default	Reading Priority	Chapter/ Reference
SessionTrace_ReadOnly	REG_DWORD	0	only HKLM	Session Traces Page

9.2.25 Software\SAP\SAPGUI Front\SAP Frontend Server\Window

Value	Type	Default	Reading Priority	Chapter/ Reference
Maximize	REG_DWORD	0	only HKCU	SAP Note 103019

9.2.26 Software\SAP\SAPGui\Administration

Value	Type	Default	Reading Priority	Chapter/ Reference
UpDownload_CP	REG_DWORD	See note	HKCU --> HKLM	SAP Note 1073779

9.2.27 Software\SAP\SAPGui\Trace

Value	Type	Default	Reading Priority	Chapter/ Reference
Level_ReadOnly	REG_DWORD	0	only HKLM	SAP GUI Traces Page

9.2 Registry Keys Overview

9.2.28 Software\SAP\SAPLogon

Value	Type	Default	Reading Priority	Chapter/ Reference
AutoClose	REG_DWORD	1	HKLM --> HKCU	SAP Note 743482
HideColumnGroupServerOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
HideColumnMessageServerOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
HideColumnRouterOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
HideColumnSIDOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
HideColumnSysNoOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
HideColumnSystemDescriptionOnSystemTab	REG_DWORD	1 (hidden) 0 (displayed)	HKLM --> HKCU	SAP Note 806296
SearchLabelBySid	REG_DWORD	1	HKLM --> HKCU	SAP Note 864215
ShowExplorerView	REG_DWORD	1	none	Disabling SAP Logon Views via Registry
ShowListView	REG_DWORD	1	none	Disabling SAP Logon Views via Registry
ShowTreeView	REG_DWORD	1	none	Disabling SAP Logon Views via Registry

9.2.29 Software\SAP\SAPLogon\Options

Value	Type	Default	Reading Priority	Chapter/ Reference
AllowCachingServerConfigFiles	REG_DWORD	1	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	Server Configuration Files Page
ConfigFileOnServer	REG_EXPAND_SZ	“ “	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	Server Configuration Files Page
ConfirmDelete	REG_DWORD	1	SAP Logon (Pad): HKCU --> HKLM	SAP Logon Options - General Page

Registry Keys Overview

			(HKLM --> HKCU)	
CoreLandscapeFileOnServer	REG_EXPAND_SZ	“ ”	HKLM --> HKCU	Server Configuration Files Page
HideToTrayBar	REG_DWORD	0	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	SAP Logon Options - General Page
LandscapeCacheExpiryPeriod	REG_DWORD	0	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	Server Configuration Files Page
LandscapeFileOnServer	REG_EXPAND_SZ	“ ”	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	Server Configuration Files Page
MessageServerTimeout	REG_DWORD	10	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	SAP Logon Options - General Page
NoEditFunctionality	REG_DWORD	0	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	SAP Logon Options - General Page
PathConfigFilesLocal	REG_EXPAND_SZ	%APPDATA%\SAP\Common	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	Local Configuration Files Page
SapguiNTCmdOpts	REG_SZ	“ ”	SAP Logon (Pad): HKCU --> HKLM (HKLM --> HKCU)	SAP Logon Options - General Page
SAPLogonTraceLevel_ReadOnly	REG_DWORD	0	only HKLM	SAP Logon Traces Page
UseSAPLogonLanguageAsDefault	REG_DWORD	1	SAP Logon (Pad): HKCU -->	SAP Logon Options -

9.2 Registry Keys Overview

			HKLM (HKLM --> HKCU)	General Page
--	--	--	----------------------------	------------------------------

9.2.30 Software\SAP\SAPLogon\Settings

Value	Type	Default	Reading Priority	Chapter/ Reference
DisplaySplashScreen	REG_DWORD	0	HKCU --> HKLM	SAP Note 1588886
SplashOff	REG_SZ	1	HKCU --> HKLM	SAP Note 1588886
SplitterPosition	REG_SZ	splitter size of the left pane in %	HKCU --> HKLM	SAP Note 1992105

9.2.31 Software\SAP\SAPLogon\Settings\Connections

Value	Type	Default	Reading Priority	Chapter/ Reference
ColumnWidth1	REG_DWORD	200	only HKCU	SAP Note 1452898

9.2.32 Software\SAP\SAPShortcut\Security

Value	Type	Default	Reading Priority	Chapter/ Reference
EnablePassword	REG_DWORD	0	HKCU --> HKLM	SAP Note 146173

9.2.33 Software\Wow6432Node\SAP\SAPLogon

Value	Type	Default	Reading Priority	Chapter/ Reference
LandscapeFormatEnabled	REG_DWORD	1	Only HKLM	SAP Note 2220930