



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

Experiment No. 2
Use of Sqoop tool
Date of Performance:24/07/2023
Date of Submission:31/07/2023



AIM: To install SQOOP and execute basic commands of Hadoop ecosystem component Sqoop.

THEORY:

Installation and configuration of SQOOP

1) Download SQOOP from <https://sqoop.apache.org>

2) Unzip and Install SQOOP

After Downloading the SQOOP, we need to Unzip the sqoop-1.4.7.bin_hadoop-2.6.0.tar.gz file.

3) Create a folder and move the final extracted file in it.

4) Set up the environment variables

a. Set SQOOP_HOME

b. Set up path variable

5) Configure SQOOP

Basic SQOOP commands:

1. List Table

This command lists the particular table of the database in MYSQL server.

```
sqoop list - tables --connect jdbc:mysql://localhost/payment --username gatner
```

2. Target directory

This command import table in a specific directory in HDFS. -m denotes mapper argument. They have an integer value.

```
$ sqoop import --connect jdbc:mysql://localhost/inventory --username jony -table inventory --m 1 --target-dir/inv
```

3. sqoop-eval

This command runs quickly SQL queries of the respective database.

```
$ sqoop eval --connect --query "SQLQuery"
```



4. sqoop – version

This command displays version of the sqoop.

```
$ sqoop version      sqoop {revnumber}
```

5. sqoop-job

This command allows us to create a job, the parameters that are created can be invoked at any time. They take options like (–create,–delete,–show,–exit).

```
$ sqoop job --create --import --connect --table
```

6. code gen

This Sqoop command creates java class files which encapsulate the imported records. All the java files are recreated, and new versions of a class are generated. They generate code to interact with database records. Retrieves a list of all the columns and their datatypes.

```
$ sqoop codegen --connect -table
```



7. List Database

This Sqoop command lists have all the available database in the RDBMS server.

```
>$ sqoop list - database -- connect
```



OUTPUT:

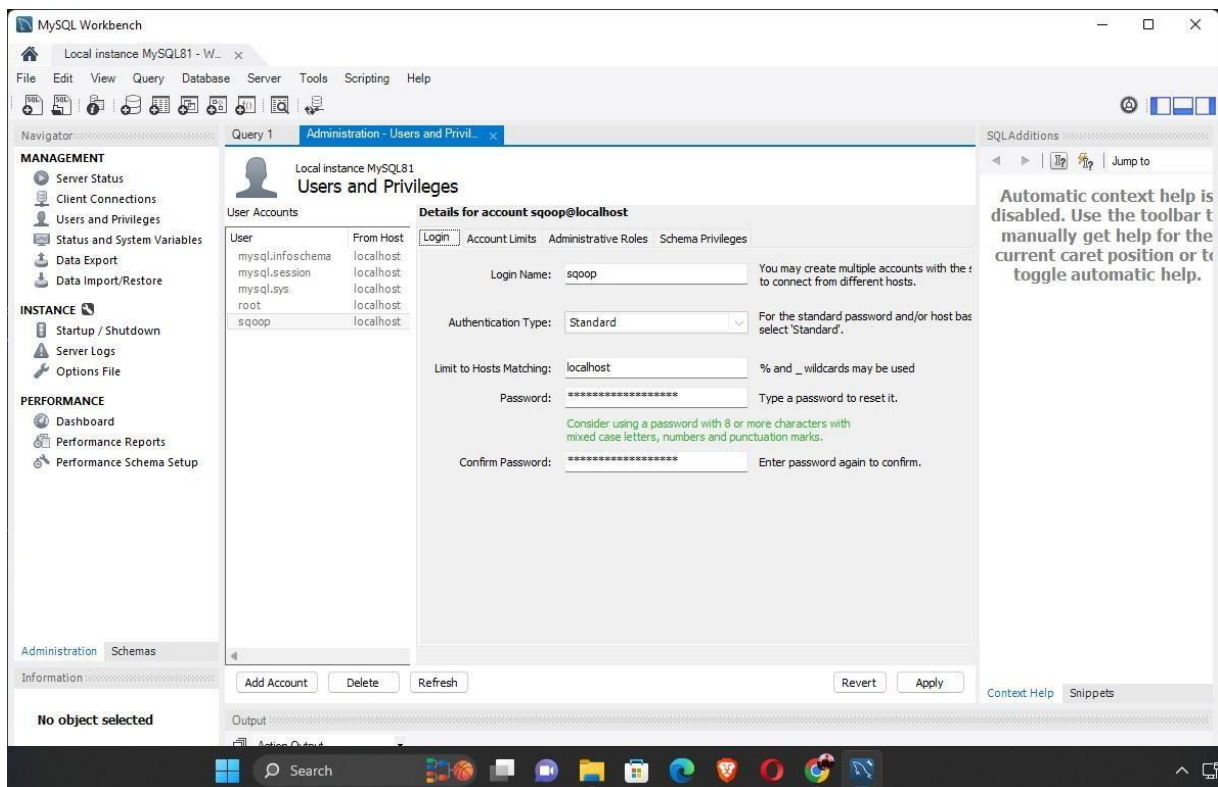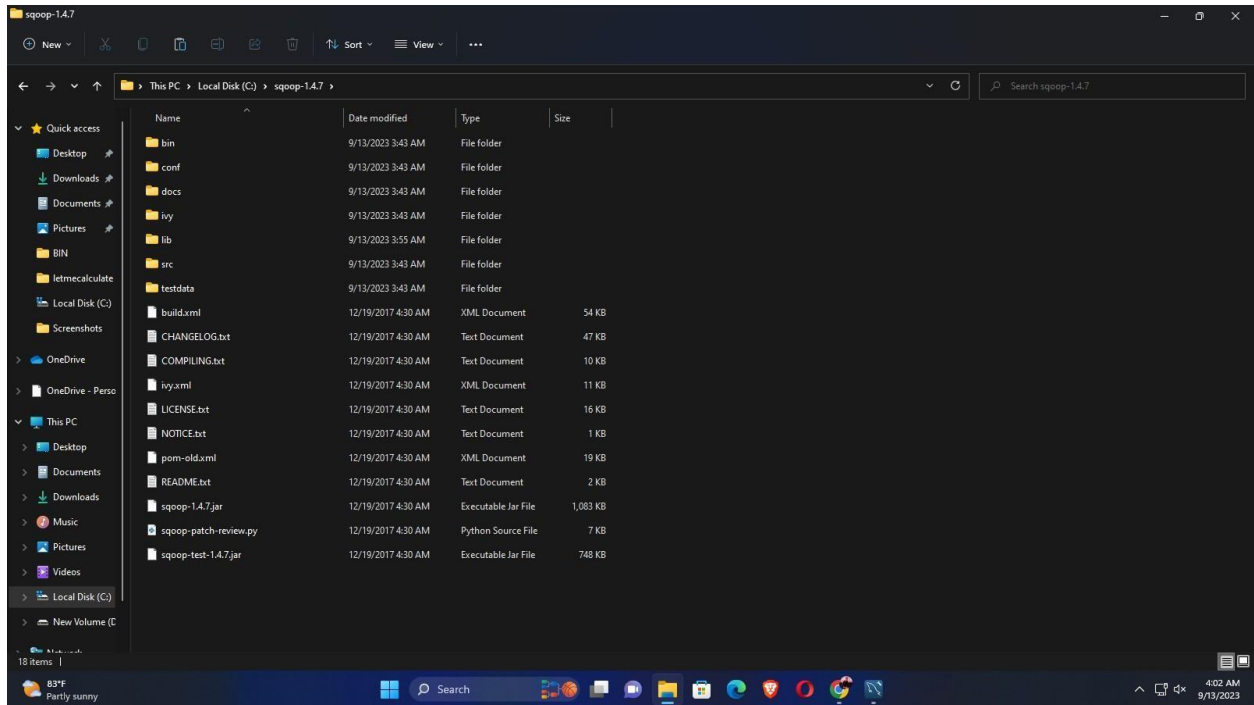



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

MySQL Workbench

Local instance MySQL81 - W...

File Edit View Query Database Server Tools Scripting Help

Navigator: Administration - Users and Priv...

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Local instance MySQL81

Users and Privileges

User Accounts

User	From Host
mysql.infoschema	localhost
mysql.session	localhost
mysql.sys	localhost
root	localhost
sqoop	localhost

Details for account sqoop@localhost

Login Account Limits Administrative Roles Schema Privileges

Role Description

- ☐ DBA grants the rights to
- ☐ MaintenanceAdmin grants rights need
- ☐ ProcessAdmin rights needed to as
- ☐ UserAdmin grants rights to cre
- ☐ SecurityAdmin rights to manage lo
- ☐ MonitorAdmin minimum set of rig
- ☒ DBManager grants full rights on
- ☐ DBDesigner rights to create and
- ☐ ReplicationAdmin rights needed to se
- ☒ BackupAdmin minimal rights need

Global Privileges

- ☒ ALTER
- ☒ ALTER ROUTINE
- ☒ CREATE
- ☒ CREATE ROUTINE
- ☐ CREATE TABLESPACE
- ☒ CREATE TEMPORARY TABLES
- ☒ CREATE USER
- ☒ CREATE VIEW
- ☒ DELETE
- ☒ DROP
- ☐ EVENT
- ☐ EXECUTE
- ☐ FILE
- ☐ GRANT OPTION
- ☒ INDEX
- ☒ INSERT
- ☒ LOCK TABLES
- ☐ PROCESS
- ☐ REFERENCES

Revoke All Privileges

Add Account Delete Refresh Revert Apply

Output

Context Help Snippets

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

Local instance MySQL81 - W...

File Edit View Query Database Server Tools Scripting Help

Navigator: Administration - Users and Priv...

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Local instance MySQL81

Users and Privileges

User Accounts

User	From Host
mysql.infoschema	localhost
mysql.session	localhost
mysql.sys	localhost
root	localhost
sqoop	localhost

Details for account sqoop@localhost

Login Account Limits Administrative Roles Schema Privileges

Schema Privileges

Schema	Privileges
%_bigdata%	ALTER, ALTER ROUTINE, CREATE, CREATE ROUTINE, CREATE TEMPORARY TABLES, CREATE VIEW, DE

Schema and Host fields may use % and _ wildcards.
The server will match specific entries before wildcarded ones.

The user 'sqoop'@'localhost' will have the following access rights to schemas matching '%_bigdata%':

Object Rights

- ☒ SELECT
- ☒ INSERT
- ☒ UPDATE
- ☒ DELETE
- ☒ EXECUTE
- ☒ SHOW VIEW

DDL Rights

- ☒ CREATE
- ☒ ALTER
- ☒ REFERENCES
- ☒ INDEX
- ☒ CREATE VIEW
- ☒ CREATE ROUTINE
- ☒ ALTER ROUTINE
- ☒ EVENT
- ☒ DROP
- ☒ TRIGGER

Other Rights

- ☒ GRANT OPTION
- ☒ CREATE TEMPORARY TABLES
- ☒ LOCK TABLES

The REFERENCES privilege currently is unused.

Revoke All Privileges Delete Entry Add Entry...

Add Account Delete Refresh Revert Apply

Output

Action Output

#	Time	Action	Message	Duration / Fetch
---	------	--------	---------	------------------

Object Info Session



Context Help Snippets

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

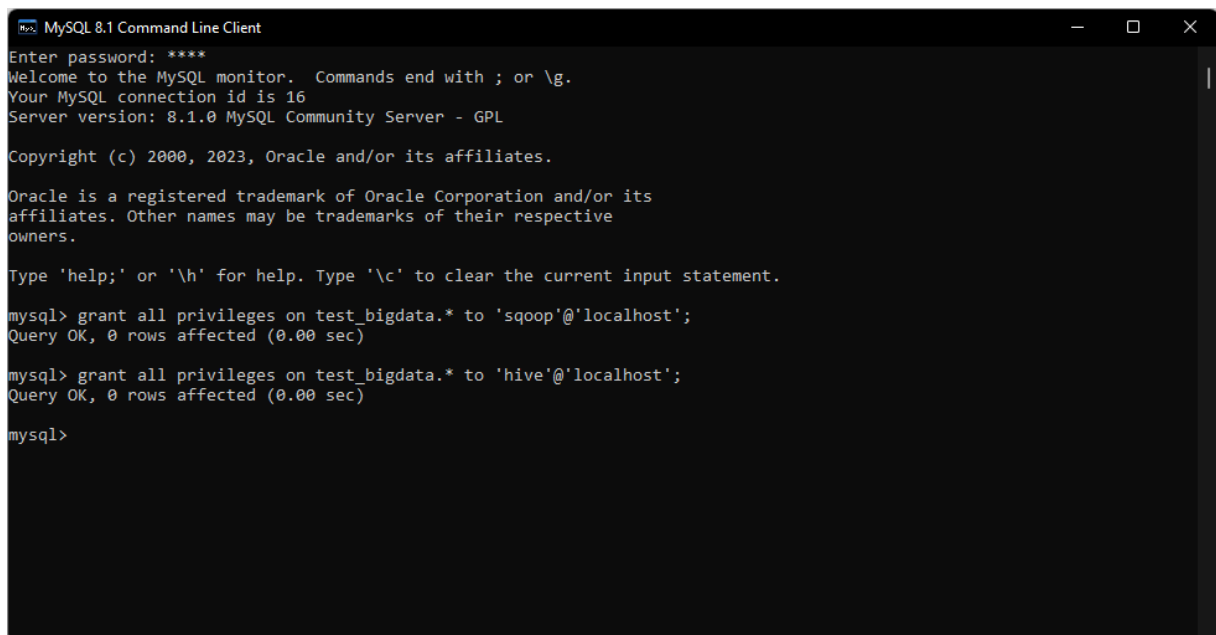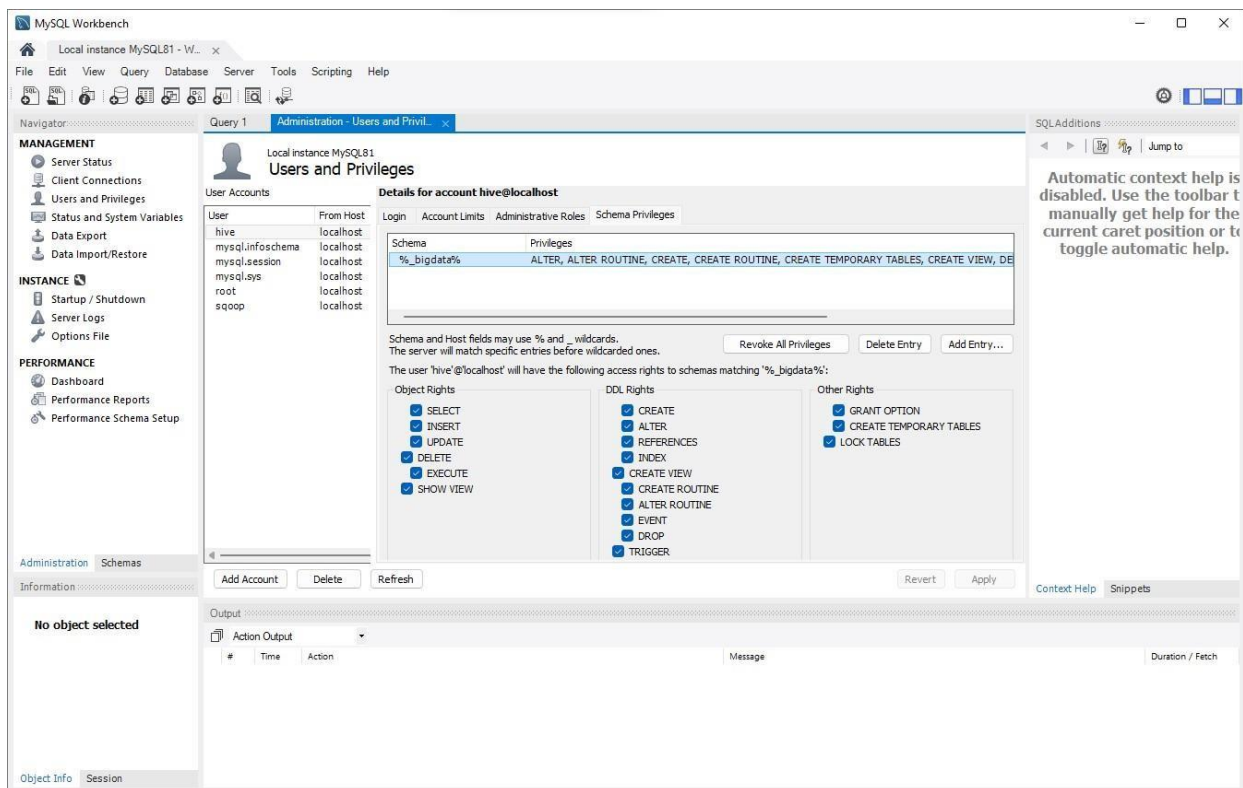



```
Command Prompt
Microsoft Windows [Version 10.0.22000.2295]
(c) Microsoft Corporation. All rights reserved.

C:\Users\admin>echo %SQOOP_HOME%
C:\sqoop-1.4.7

C:\Users\admin>sqoop list-databases --connect jdbc:mysql://localhost/ --username sqoop -P
Warning: HBASE_HOME and HBASE_VERSION not set.
Warning: HCAT_HOME not set
Warning: HCATALOG_HOME does not exist HCatalog imports will fail.
Please set HCATALOG_HOME to the root of your HCatalog installation.
Warning: ACCUMULO_HOME not set.
Warning: ZOOKEEPER_HOME not set.
Warning: HBASE_HOME does not exist HBase imports will fail.
Please set HBASE_HOME to the root of your HBase installation.
Warning: ACCUMULO_HOME does not exist Accumulo imports will fail.
Please set ACCUMULO_HOME to the root of your Accumulo installation.
Warning: ZOOKEEPER_HOME does not exist Accumulo imports will fail.
Please set ZOOKEEPER_HOME to the root of your Zookeeper installation.
2023-09-13 04:22:22,757 INFO sqoop.Sqoop: Running Sqoop version: 1.4.7
Enter password:
2023-09-13 04:22:26,809 INFO manager.MySQLManager: Preparing to use a MySQL streaming resultset.
Loading class `com.mysql.jdbc.Driver'. This is deprecated. The new driver class is `com.mysql.cj.jdbc.Driver'. The drive
r is automatically registered via the SPI and manual loading of the driver class is generally unnecessary.
mysql
information_schema
performance_schema
sys
C:\Users\admin>
```

```
Command Prompt
No such sqoop tool: list. See 'sqoop help'.

C:\Users\admin>sqoop list-tables --connect jdbc:mysql://localhost/ --username sqoop -P
Warning: HBASE_HOME and HBASE_VERSION not set.
Warning: HCAT_HOME not set
Warning: HCATALOG_HOME does not exist HCatalog imports will fail.
Please set HCATALOG_HOME to the root of your HCatalog installation.
Warning: ACCUMULO_HOME not set.
Warning: ZOOKEEPER_HOME not set.
Warning: HBASE_HOME does not exist HBase imports will fail.
Please set HBASE_HOME to the root of your HBase installation.
Warning: ACCUMULO_HOME does not exist Accumulo imports will fail.
Please set ACCUMULO_HOME to the root of your Accumulo installation.
Warning: ZOOKEEPER_HOME does not exist Accumulo imports will fail.
Please set ZOOKEEPER_HOME to the root of your Zookeeper installation.
2023-09-13 04:25:49,023 INFO sqoop.Sqoop: Running Sqoop version: 1.4.7
Enter password:
2023-09-13 04:25:53,985 INFO manager.MySQLManager: Preparing to use a MySQL streaming resultset.
Loading class `com.mysql.jdbc.Driver'. This is deprecated. The new driver class is `com.mysql.cj.jdbc.Driver'. The drive
r is automatically registered via the SPI and manual loading of the driver class is generally unnecessary.

C:\Users\admin>
```

CONCLUSION:

The experiment focused on configuring and using Sqoop, an essential component of the Hadoop ecosystem. It did a good job of illustrating Sqoop's capabilities, which include importing and exporting data between relational databases and Hadoop as well as performing data transformations while doing so. The exercise also demonstrated how well Sqoop integrates with different Hadoop components and how well it can move data in parallel.

This example demonstrated how important Sqoop is in bridging the gap between relational databases and Hadoop's distributed storage, making it a vital tool for businesses dealing with a variety of data sources. Gaining expertise in Sqoop equips data workers with the abilities needed to optimise data processes and realise the full potential of massive data projects.