



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Name:	Prerna Sanjay Mhatre
Roll No:	68
Class/Sem:	TE/V
Experiment No.:	2
Title:	Implementation of Dimension and Fact tables and perform OLAP operations.
Date of Performance:	
Date of Submission:	
Marks:	
Sign of Faculty:	



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Aim: Implementation of Dimension and Fact tables and perform OLAP operations.

Objective: OLAP stands for Online Analytical Processing. The objective of OLAP is to analyze information from multiple database systems at the same time. It is based on multidimensional data model and allows the user to query on multi-dimensional data.

Theory:

- Online Analytical Processing Server (OLAP) is based on the multidimensional data model.
- The main aim of OLAP is to provide multidimensional analysis to the underlying data. Following is the list of OLAP operations:
 1. Roll-up
 2. Drill-down
 3. Slice
 4. Dice
 5. Pivot (rotate)

Roll-up:

- The roll-up operation (also called the drill-up operation) performs aggregation on a data cube, either by climbing up a concept hierarchy for a dimension or by dimension reduction.
- Figure 2.1 shows the result of a roll-up operation performed on the central cube by climbing up the concept hierarchy for location.
- This hierarchy was defined as the total order “street < city < province or state < country.”
- The roll-up operation aggregates the data by ascending the location hierarchy from the level of city to the level of country.
- In other words, rather than grouping the data by city, the resulting cube groups the data by country.

Drill-down:

- Drill-down is the reverse of roll-up. It navigates from less detailed data to more detailed data.
- Drill-down can be realized by either stepping down a concept hierarchy for a dimension or introducing additional dimensions.
- Figure 2.1 shows the result of a drill-down operation performed on the central cube by stepping down a concept hierarchy for time defined as “day < month < quarter < year.”
- Drill-down occurs by descending the time hierarchy from the level of quarter to the more detailed level of month.



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

- The resulting data cube details the total sales per month rather than summarizing them by quarter.

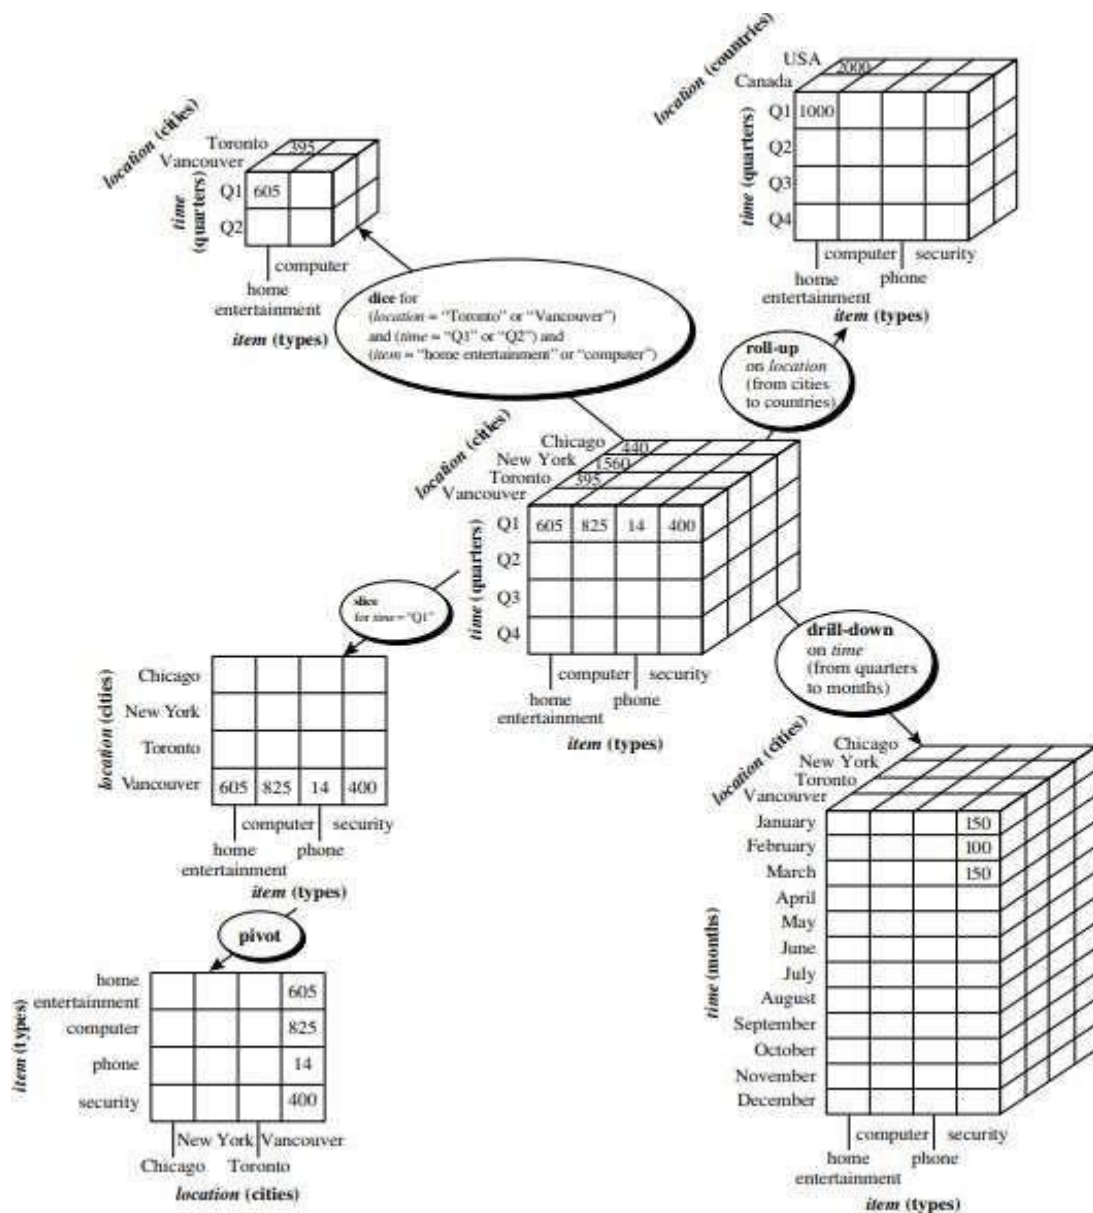


Figure 2.1: Examples of typical OLAP operations on multidimensional data. Slice:



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

- The slice operation performs a selection on one dimension of the given cube, resulting in a subcube.
- Figure 2.1 below shows a slice operation where the sales data are selected from the central cube for the dimension time using the criterion time = "Q1."

Dice:

- The dice operation defines a subcube by performing a selection on two or more dimensions.
- Figure 2.1 shows a dice operation on the central cube based on the following selection criteria that involve three dimensions: (location = "Toronto" or "Vancouver") and (time = "Q1" or "Q2") and (item = "home entertainment" or "computer").

Pivot:

- Pivot (also called rotate) is a visualization operation that rotates the data axes in view to provide an alternative data presentation.
- Figure 2.1 shows a pivot operation where the item and location axes in a 2-D slice are rotated.

Problem Statement:

We are tasked with designing and implementing a data warehousing solution for an E-commerce company. Our objective is to create Dimension and Fact tables and perform OLAP (Online Analytical Processing) operations for data analysis.

Output:

1. Creating the Dimension Tables



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
SQL Worksheet
```

```
1 CREATE TABLE OLAP
2 (
3     CUST_ID      NUMBER(3)    PRIMARY KEY,
4     CUST_NAME    VARCHAR2(20),
5     NO_OF_PRODUCTS NUMBER(3),
6     STORE_NAME   VARCHAR2(54),
7     STORE_LOCATION VARCHAR2(25));
```

```
Table created.
```

2. Creating the Fact Table

```
SQL Worksheet
```

```
1 CREATE TABLE PRODUCTSALSALES
2 ( TRANSACTION_ID  VARCHAR2(20)  PRIMARY KEY,
3   INVOICE_NO      VARCHAR2(10),
4   TOTAL_AMOUNT    VARCHAR2(10),
5   CUSTOMER_ID     VARCHAR2(10)  REFERENCES CUSTOMER(CUSTOMER_ID),
6   PRODUCT_ID      VARCHAR2(10)  REFERENCES PRODUCT(PRODUCT_ID),
7   STORE_ID        VARCHAR2(10)  REFERENCES STORE(STORE_ID),
8   SALESPERSON_ID  VARCHAR2(10)  REFERENCES SALESPERSON(SALESPERSON_ID)
9 );
10
11 INSERT INTO PRODUCTSALSALES VALUES('1', '501', '1678', '4', '3', '5', '2');
```

```
Table created.

1 row(s) inserted.
```

3. Inserting values in both dimension and fact tables



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

```
SQL Worksheet
```

```
1 INSERT INTO OLAP VALUES ('1','ARCHIT KONDE','2','Star Bazaar','THANE');
2 INSERT INTO OLAP VALUES ('2','SAAKSHI DEOKAR','1','DMart','GOREGAON');
3 INSERT INTO OLAP VALUES ('3','HASAN RIZVI','4','DMart','THANE');
4 INSERT INTO OLAP VALUES ('4','MEGA MODHA','3','Big Bazaar','GHATKOPAR');
5 INSERT INTO OLAP VALUES ('5','HAYURESH PHAKISTAR','2','DMart','SEAWOODS');
6 INSERT INTO OLAP VALUES ('6','INJIILA HUSSAIN','1','Big Bazaar','KURLA');
7 INSERT INTO OLAP VALUES ('7','SAURABH KILLEKAR','2','Hyper City','THANE');
8 INSERT INTO OLAP VALUES ('8','SAKSHI KHARE','1','Star Bazaar','GHATKOPAR');
```

```
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
1 row(s) inserted.
```

```
SQL Worksheet
```

```
1 CREATE TABLE PRODUCTSALLES
2 ( TRANSACTION_ID VARCHAR2(20) PRIMARY KEY,
3 INVOICE_NO VARCHAR2(10),
4 TOTAL_AMOUNT VARCHAR2(10),
5 CUSTOMER_ID VARCHAR2(10) REFERENCES CUSTOMER(CUSTOMER_ID),
6 PRODUCT_ID VARCHAR2(10) REFERENCES PRODUCT(PRODUCT_ID),
7 STORE_ID VARCHAR2(10) REFERENCES STORE(STORE_ID),
8 SALESPERSON_ID VARCHAR2(10) REFERENCES SALESPERSON(SALESPERSON_ID)
9 );
10
11 INSERT INTO PRODUCTSALLES VALUES('1','501','1678','4','3','5','2');
```

```
Table created.
1 row(s) inserted.
```

4. Displaying the tables



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

SQL Worksheet

Clear Find Actions Save Run

```
1 SELECT * FROM OLAP;
```

CUST_ID	CUST_NAME	NO_OF_PRODUCTS	STORE_NAME	STORE_LOCATION
1	ARCHIT KONDE	2	Star Bazaar	THANE
2	SAAKSHI DEOKAR	1	DMart	GOREGAON
3	HASAN RIZVI	4	DMart	THANE
4	MEGA MODHA	3	Big Bazaar	GHATKOPAR
5	MAYURESH PHANSIKAR	2	DMart	SEAHOODS
6	INJILA HUSSAIN	1	Big Bazaar	KURLA
7	SAURABH KILLEKAR	2	Hyper City	THANE
8	SAKSHI KHARE	1	Star Bazaar	GHATKOPAR

Download CSV
8 rows selected.

- Roll UP :

SQL Worksheet

Clear Find Actions Save Run

```
1 SELECT STORE_NAME, SUM(NO_OF_PRODUCTS) AS TOTALPRODUCT FROM OLAP GROUP BY STORE_NAME;
```

STORE_NAME	TOTALPRODUCT
Star Bazaar	3
Big Bazaar	4
DMart	7
Hyper City	2

Download CSV
4 rows selected.



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

- Drill Down :

SQL Worksheet

Clear Find Actions Save Run

```
1 SELECT CUST_ID,CUST_NAME,NO_OF_PRODUCTS, STORE_LOCATION FROM OLAP;
```

CUST_ID	CUST_NAME	NO_OF_PRODUCTS	STORE_LOCATION
1	ARCHIT KONDE	2	THANE
2	SAAKSHI DEOKAR	1	GOREGAON
3	HASAN RIZVI	4	THANE
4	HEGA PDDHG	3	GHATKOPAR
5	NAVYURESH PHANGSIKAR	2	SEAHOODS
6	INTILA MUSSAII	1	KURLA
7	SAURABH KILLEKAR	2	THANE
8	SAKSHI KHARE	1	GHATKOPAR

Download CSV
8 rows selected.

- Slice

SQL Worksheet

Clear Find Actions Save Run

```
1 SELECT * FROM OLAP WHERE STORE_LOCATION='THANE';
```

CUST_ID	CUST_NAME	NO_OF_PRODUCTS	STORE_NAME	STORE_LOCATION
1	ARCHIT KONDE	2	Star Bazzar	THANE
3	HASAN RIZVI	4	DMart	THANE
7	SAURABH KILLEKAR	2	Hyper City	THANE

Download CSV
3 rows selected.



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

- Dice :

The screenshot shows an SQL Worksheet interface. At the top, there are buttons for 'Clear', 'Find', 'Actions', 'Save', and a 'Run' button with a play icon. Below the buttons, a text area contains the SQL query: `1 SELECT * FROM OLAP WHERE NO_OF_PRODUCTS=2 AND STORE_LOCATION='THANE';`. Below the query, a table displays the results. The table has five columns: CUST_ID, CUST_NAME, NO_OF_PRODUCTS, STORE_NAME, and STORE_LOCATION. There are two rows of data. Below the table, there is a 'Download CSV' link and the text '2 rows selected.'.

CUST_ID	CUST_NAME	NO_OF_PRODUCTS	STORE_NAME	STORE_LOCATION
1	ARCHIT KONDE	2	Star Bazaar	THANE
7	SAURABH KILLEKAR	2	Hyper City	THANE

Download CSV
2 rows selected.

5. Write SQL Queries for all the above OLAP operations.

1. Roll up

SELECT STORE_NAME, SUM(NO_OF_PRODUCTS) AS TOTALPRODUCT FROM OLAP GROUP BY STORE_NAME;

2. Drill Down

SELECT CUST_ID,CUST_NAME,NO_OF_PRODUCTS, STORE_LOCATION FROM OLAP;

3. Slice

SELECT * FROM OLAP WHERE STORE_LOCATION='THANE';

4. Dice

SELECT * FROM OLAP WHERE NO_OF_PRODUCTS=2 AND STORE_LOCATION='THANE';



Vidyavardhini's College of Engineering and Technology

Department of Artificial Intelligence & Data Science

Conclusion:

In summary, OLAP operations are essential for exploring data, controlling granularity, and enabling flexible, efficient, and informed decision-making. They empower organizations to analyze historical data, forecast trends, and integrate with BI tools. Continuous learning and adaptation to emerging best practices are key to maximizing the benefits of OLAP in data analysis and decision-making.