

WPS Experiment content

P. S. K. Pavan Kalyan

1602-19-733-050

CSE-A

Html : (index.php only html part)

```
<!DOCTYPE html>
<html lang="en" dir="ltr">
  <head>
    <meta charset="utf-8">
    <link rel="stylesheet" href="index.css">
    <title>InTurn Login page</title>
  </head>
  <body style="background-color: #CCFAFF;">
    <center>
      <div class="uppad">
        <b><i>InTurner</i></b>
      </div>
      <div class="loginbox">
        <form action="" method="post">
          <label for="usn">Username : </label>
          <input type="text" name="usn" />
          <br><br>
          <label for="psw">Password : </label>
          <input type="password" name="psw">
          <br><br>
          <label for="team">Team login</label>
          <input type="checkbox" name="team" style="height: 20px;width :20px;">
          <br><br>
          <button type="submit" name="subbut">Login</button>
        </form>
      </div>
    </center>
    <div class="newacc">
      Don't have an account ?<br>
      <a href="http://localhost/INTurner/indsign.php" target="_blank">Sign up as
individual</a>
      <br>
      <a href="http://localhost/INTurner/teamsign.php" target="_blank">Sign up as team</a>
    </div>
  </body>
</html>
```

CSS :

(index.css)

```
.uppad{
  color : white;
```

```
background-color: blue;
padding-bottom: 20px;
padding-bottom: 20px;
font-size: 140px;
font-family: sans-serif;
}
```

```
.loginbox{
font-size: 40px;
padding-top: 120px;
}
```

```
input,select{
font-size: 20px;
}
```

```
button{
font-size: 30px;
}
```

```
.newacc{
position: absolute;
right: 60px;
font-size: 2em;
}
```

HTML Page: index.php



The screenshot shows a web browser window with the title "InTurn Login page" and the address bar displaying "localhost/INTurner/". The page features a prominent blue header with the "InTurner" logo in white, italicized font. Below the header, on a light blue background, is a login form. The form includes labels for "Username :" and "Password :", each followed by a text input field. Below these fields is a "Team login" checkbox. A "Login" button is positioned below the checkbox. In the bottom right corner, there is a link "Don't have an account ?" followed by two sub-links: "Sign up as individual" and "Sign up as team".

Username :

Password :

Team login ☐

Login

Don't have an account ?
[Sign up as individual](#)
[Sign up as team](#)

HTML form : signind.php

The screenshot shows a web browser window with two tabs: 'InTurn Login page' and 'InTurner Signup form'. The address bar shows 'localhost/INTurner/indsign.php'. The page has a blue header with the 'InTurner' logo. Below the header, it says 'Sign up here as individual'. The form fields include: Full Name, Gmail, Contact number, Occupation (present) (dropdown), Experience (in work if any) (dropdown), Username, and Password. There is a 'Create' button and a link 'Or click here to register as a team'.

Javascript : (Snippet from teampro.php)

```
<?php
session_start();
echo '<script>' //Javascript function used by php code
function preventBack() {
    window.history.forward();
}

setTimeout("preventBack()", 0);
window.onunload = function() {
    null
};
</script>';

if(!in_array("teamid",array_keys($_SESSION))){
    session_destroy();
    echo '<script>'
    function preventBack() {
        window.history.forward();
    }


    setTimeout("preventBack()", 0);
    window.onunload = function() {
        null
    };
</script>';
    header("Location: http://localhost/INTurner");
}
$con = mysqli_connect("localhost","root","","teams");
$tid = $_SESSION['teamid'];
$dets = mysqli_fetch_array(mysqli_query($con,"select * from `profs` where tid=".$tid.";"));
$nm = $dets[1];
```

```
$em = $dets[2];
$exp = $dets[4];
?>
```

Database connectivity : (snippet from index.php)

```
$dets = mysqli_fetch_array(mysqli_query($con,"select * from `profs` where
pid=".$pid.";"));
$nm = $dets[1];
$em = $dets[2];
$occ = $dets[4];
$exp = $dets[5];
.
.
.
<div style="font-size:70px;"><b><?php echo $nm;?></b></div><br>
<div style="font-size:40px;"><b><?php echo $occ; ?></b></div>
<div style="font-size:30px;"><b>Experience : <?php echo $exp; ?></b> <span
style="position: absolute; right : 20px"><a href="mailto:<?php echo $em;
?>?subject=InTurn_Invite&Message=Hello"><u>Mail me
here</u></a>&emsp;</span></div>
```

Output :

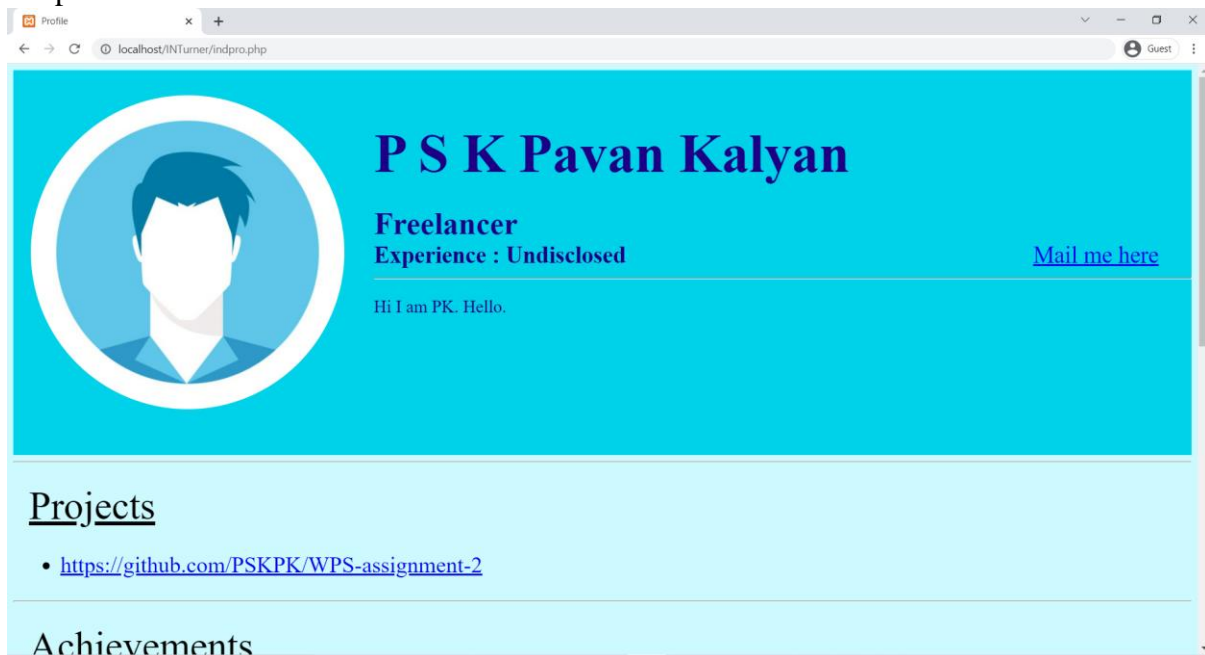

Dynamically generating name and details of account retrieved from database.

Sessions : (logout.php)


```
<?php
session_start();
session_destroy();
header("Location: http://localhost/INTurner");
?>
/////Destroys the session which is active
```

(snippet from searchindi.php):




```
<?php
if(in_array('pidarr',array_keys($_SESSION))){
    $pidarr = $_SESSION['pidarr'];
    if(count($pidarr)>0){
        echo $pidarr;
        for($i=0; $i<count($pidarr); $i++){
            $pid = $pidarr[$i];
            $con = mysqli_connect('localhost','root','','inds');
            echo "<a href='http://localhost/INTurner/gotoindi.php?indiid=". $pid."'
target='_blank'>";
            echo "<div class='card'>
                <img
src='https://st2.depositphotos.com/1104517/11965/v/600/depositphotos_119659092-stock-
illustration-male-avatar-profile-picture-vector.jpg' alt='Avatar' style='width:100%'>
                <div class='container'>";
            echo "<h4><b>".mysqli_fetch_array(mysqli_query($con,\"select name from `profs`
where pid=". $pid))[0].\"</b></h4>";
            echo "</div>
                </div>";
            echo "</a>";
        }
    }
}
?>
```

////using sessions to share variables across multiple pages

Php : (whole program frontend+backend written using php)

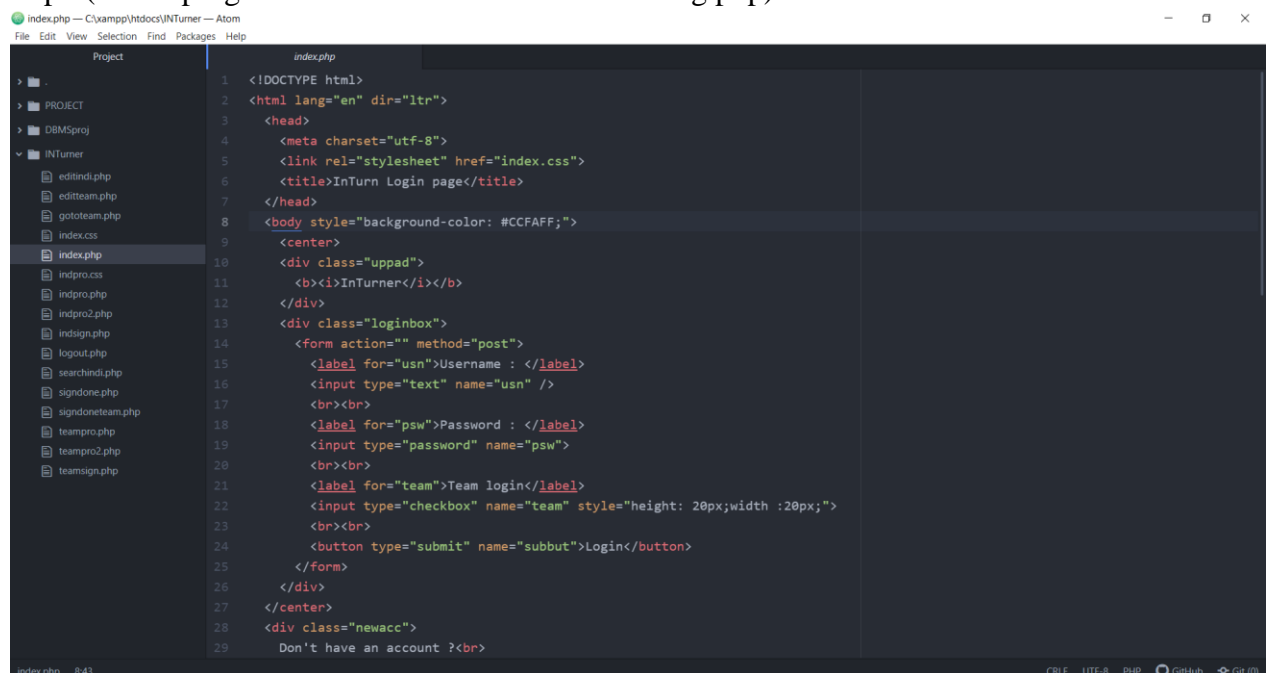

Outputs :

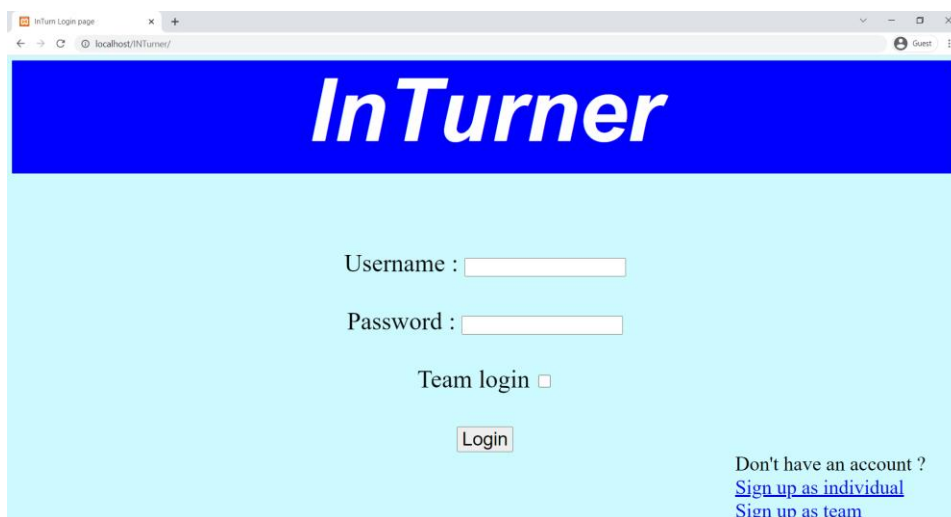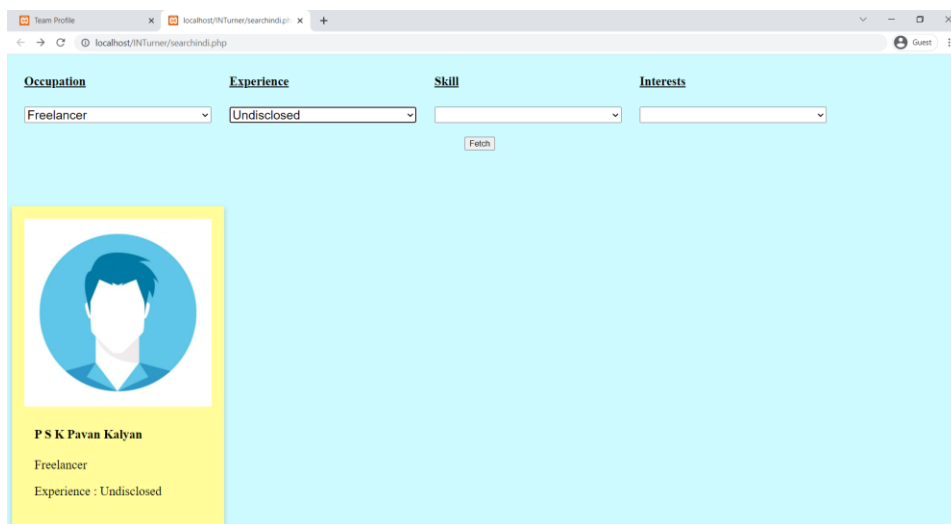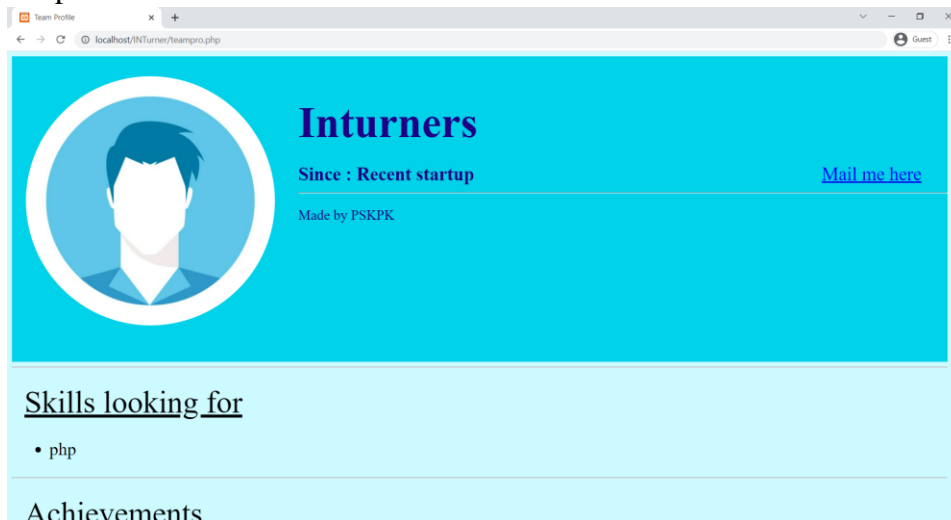

(After logging out)