



# Report of compositeService

This is a report for compositeService.bpel. Following is an overview of the BPEL process.	

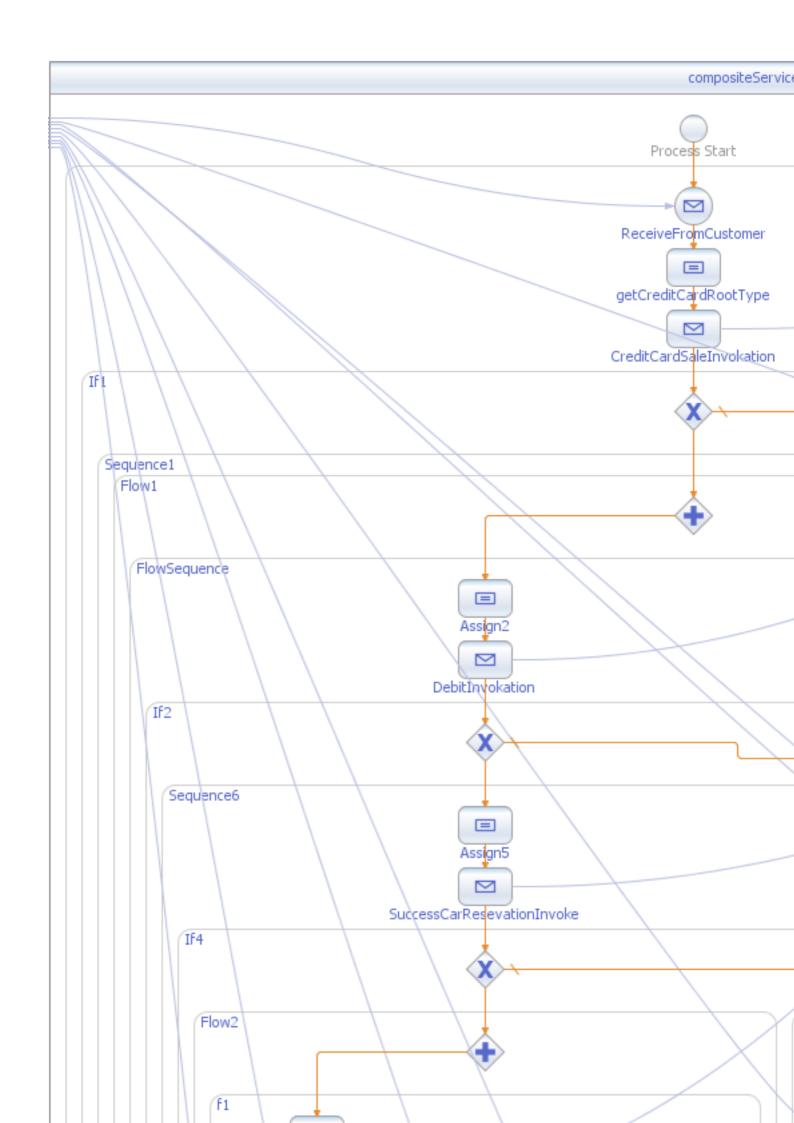

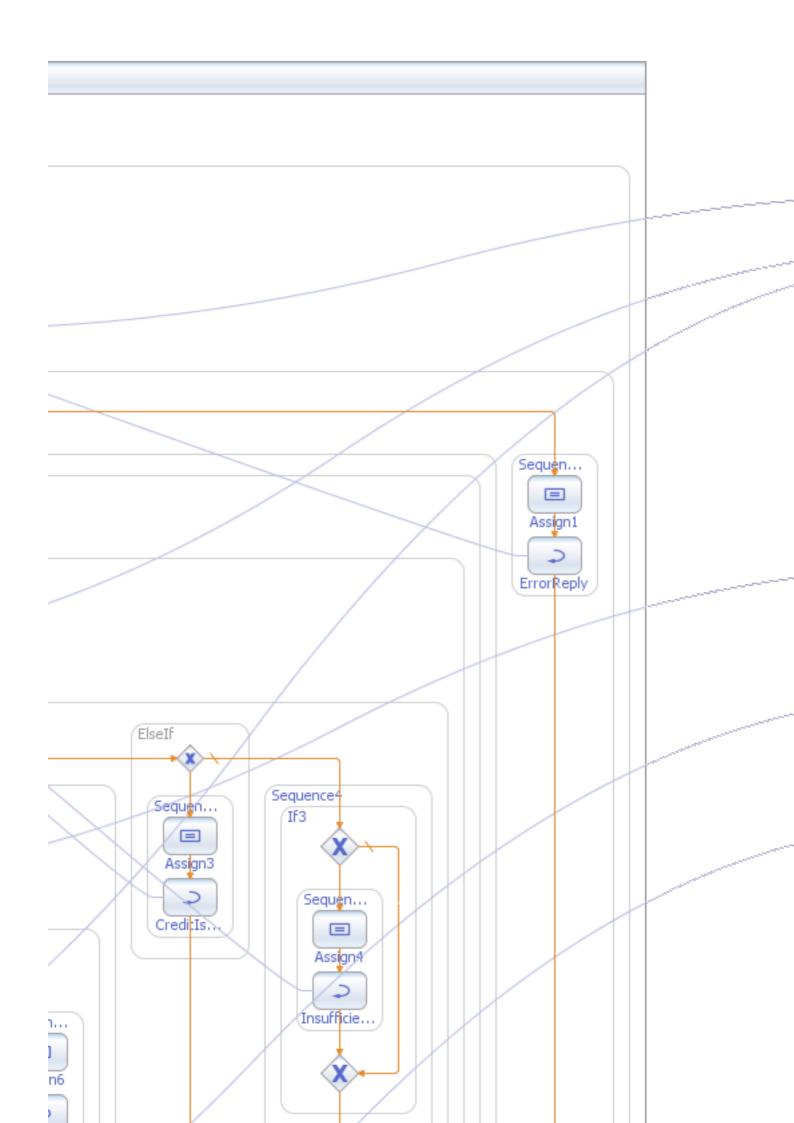



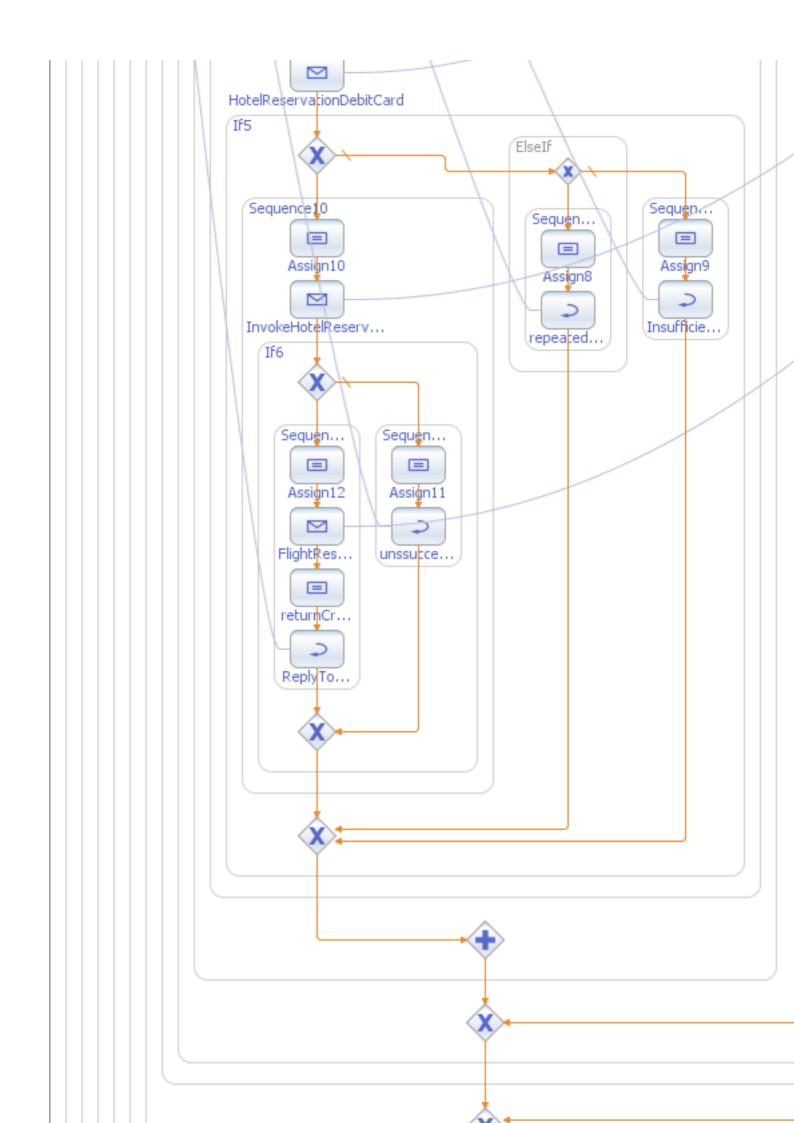



Name	compositeService
Location	C:\Users\Amr Saidam\Documents\NetBeansProjects\CompositeS ervice\src\compositeService.bpel
Size	40155 byte(s)
Created	Sun Jan 29 21:52:41 VET 2017
Last Modified	Sun Jan 29 05:42:27 VET 2017

1. This section contains details about imported documents.

# 1.1. Import

<u> </u>		
namespace	http://j2ee.netbeans.org/wsdl/CompositeService/CompositeServiceWSDL	
location	CompositeServiceWSDL.wsdl	
importType	http://schemas.xmlsoap.org/wsdl/	

# 1.2. Import

<u> </u>		
namespace	http://j2ee.netbeans.org/wsdl/CreditCardModule/CreditCardWSDL	
location	CreditCardModule/CreditCardWSDL.wsdl	
importType	http://schemas.xmlsoap.org/wsdl/	

# 1.3. Import

<u> </u>		
namespace	http://j2ee.netbeans.org/wsdl/CarRentalModule/CarRentalService	
location	CarReservationModule/CarRentalService.wsdl	
importType	http://schemas.xmlsoap.org/wsdl/	

# 1.4. Import

namespace	http://j2ee.netbeans.org/wsdl/HotelReservationModual/HotelReservationWSDL	
location	HotelReservationModual/HotelReservationWSDL .wsdl	
importType	http://schemas.xmlsoap.org/wsdl/	

# 1.5. Import

<u>@</u>		
namespace	http://j2ee.netbeans.org/wsdl/FlightService/FlightServiceWSDL	
location	FlightServiceModule/FlightServiceWSDL.wsdl	
importType	http://schemas.xmlsoap.org/wsdl/	

2. This section contains details about partner links.

#### 2.1. PartnerLink 'CreditCardService'

name	CreditCardService	
partnerLinkType	tns:CreditCardWSDL	
partnerRole	CreditCardWSDLPortTypeRole	

### 2.2. PartnerLink 'CarReservationService'

name	CarReservationService	
partnerLinkType	tns:CarRentalService	
partnerRole	CarRentalServicePortTypeRole	

#### 2.3. PartnerLink 'HotelReservation'

name	HotelReservation
partnerLinkType	tns:HotelReservationWSDL
partnerRole	HotelReservationWSDLPortTypeRole

# 2.4. PartnerLink 'FlightReservation'

name	FlightReservation	
partnerLinkType	tns:FlightServiceWSDL	
partnerRole	FlightServiceWSDLPortTypeRole	

#### 2.5. PartnerLink 'Customer'

name	Customer	
partnerLinkType	tns:CompositeServiceWSDL	
myRole	CompositeServiceWSDLPortTypeRole	

3. This section contains all variables defined in the BPEL process.

# 3.1. Variable 'ReserveFlightTripResponse'

name	ReserveFlightTripResponse
messageType	tns:ReserveFlightTripResponse

### 3.2. Variable 'ReserveFlightTripRequest'

name	ReserveFlightTripRequest
messageType	tns:ReserveFlightTripRequest

# 3.3. Variable 'HotelReservationWSDLOperationResponse'

name	HotelReservationWSDLOperationResponse
messageType	tns:HotelReservationWSDLOperationResponse

# 3.4. Variable 'HotelReservationWSDLOperationRequest'

name	HotelReservationWSDLOperationRequest
messageType	tns:HotelReservationWSDLOperationRequest

### 3.5. Variable 'DebitCardSaleResponseForHotelReservation'

name	DebitCardSaleResponseForHotelReservation
messageType	tns:DebitCardSaleResponse

### 3.6. Variable 'DebitCardSaleRequestForHotelReservation'

name	DebitCardSaleRequestForHotelReservation
messageType	tns:DebitCardSaleRequest

# 3.7. Variable 'CarReservationOperationResponse'

name	CarReservationOperationResponse
messageType	ns4:CarRentalServiceOperationResponse

# 3.8. Variable 'CarReservationOperationRequest'

name	CarReservationOperationRequest
messageType	ns4:CarRentalServiceOperationRequest

# 3.9. Variable 'DebitResponse'

name	DebitResponse
messageType	tns:DebitCardSaleResponse

# 3.10. Variable 'DebitRequest'

name	DebitRequest
messageType	tns:DebitCardSaleRequest

# 3.11. Variable 'CreditCardSaleResponse'

name	CreditCardSaleResponse
messageType	tns:CreditCardSaleResponse

# 3.12. Variable 'CreditCardSaleRequest'

name	CreditCardSaleRequest
messageType	tns:CreditCardSaleRequest

# 3.13. Variable 'ReplyFromCompsitionService'

name	ReplyFromCompsitionService
messageType	tns:ReservationOperationResponse

# 3.14. Variable 'DetailsOfAllServices'

name	DetailsOfAllServices
messageType	tns:ReservationOperationRequest

	/**\
eive 'ReceiveFrom	Customer'
	<u></u>
name	ReceiveFromCustomer
createInstance	yes
partnerLink	Customer
operation	ReservationOperation
portType	tns:CompositeServiceWSDLPortType
variable	DetailsOfAllServices
name	getCreditCardRootType
name	
y n:	getCreditCardRootType
y n:	
y n:	getCreditCardRootType  = rvationInfo/ns0:creditCard/ns0:person/ns0:name/
y n:	getCreditCardRootType
n: OfAIIServices.rese	getCreditCardRootType  = rvationInfo/ns0:creditCard/ns0:person/ns0:name/

4. Following section describes elements used in the BPEL process.

	=	
4.8. Fron	n:	
\$Details	OfAllServices.reservationInfo/ns0:creditCard/ns0:person/ns0:name/ns0	:middle
Name		
	<b>♦</b>	
4.9. To: \$	\$CreditCardSaleRequest.creditInfo/ns3:person/ns3:name/ns3:middleNa	me
	♦	
4.10. Co	pv	
	=	
4.11. Fro		
\$Details	OfAllServices.reservationInfo/ns0:creditCard/ns0:person/ns0:name/ns0	:lastNa
me		
	♦	
4.12. To:	\$CreditCardSaleRequest.creditInfo/ns3:person/ns3:name/ns3:lastName	e
4.13. Co	ру	
	=	
4.14. Fro	am:	
_	on. OfAllServices.reservationInfo/ns0:creditCard/ns0:person/ns0:phoneNur	nher
ψ <del>υσ</del> ιαπο	Ciralical vices, reservation in oriso, credit card/hist.person/hist.phoneivar	III
	♦	

.13. 10.	poreditodi dodiertequest.creditimo/nss.person/nss.phonerumber
	♦
16. Cop	ру
	=
17. Fro	m: \$DetailsOfAllServices.reservationInfo/ns0:creditCard/ns0:person/ns0
.18. To:	\$CreditCardSaleRequest.creditInfo/ns3:person/ns3:email
	♦
.19. Cop	<b>Dy</b>
	=
.20. Fro Details(	m: OfAllServices.reservationInfo/ns0:creditCard/ns0:person/ns0:address
	◆
.21. To:	\$CreditCardSaleRequest.creditInfo/ns3:person/ns3:address
	♦
.22. Cop	oy .
	=

4.23. From:

\$DetailsOfAllServices.reservationInfo/ns0:creditCard/ns0:creditCardInfo/ns0:PIN

	♦	
4.24 To:	\$CreditCardSaleRequest.creditInfo/ns3:creditCardInfo/ns3:PIN	
4.24. 10.	Treditoard Sale Nequest. Creditino/nss. Creditoardino/nss. Pin	
4.0F. O		
4.25. Cop	эу	
	=	
4.26. Fro		
	on: OfAllServices.reservationInfo/ns0:creditCard/ns0:creditCardInfo/ns0:bal	lance
	<b>♦</b>	
4.27. To:	\$CreditCardSaleRequest.creditInfo/ns3:creditCardInfo/ns3:balance	
4.28. Cop	э	
	_	
4.29. Fro	om: OfAllServices.reservationInfo/ns0:creditCard/ns0:creditCardInfo/ns0:exp	niredDat
e		Sircabat
	<b>♦</b>	
4.30. To:	\$CreditCardSaleRequest.creditInfo/ns3:creditCardInfo/ns3:expiredDate	)
	♦	

#### 4.31. Invoke 'CreditCardSaleInvokation'

name	CreditCardSaleInvokation	
partnerLink	CreditCardService	
operation	CreditCardSale	
portType	tns:CreditCardWSDLPortType	
inputVariable	CreditCardSaleRequest	
outputVariable	CreditCardSaleResponse	

#### 4.32. If 'If1'

*	
name	If1

# 4.33. BooleanExpr: \$CreditCardSaleResponse.creditStatus = 'Done!'



# 4.34. Sequence 'Sequence1'

name	Sequence1	

#### 4.35. Flow 'Flow1'

<b>⊕</b>	
name	Flow1

# 4.36. Sequence 'FlowSequence'

	$\Box$
name	FlowSequence

### 4.37. Assign 'Assign2'



	name	Assign2	
4.38. Co	pv		
	<b>F</b> 7		
		=	
4.00 E.			
4.39. Fro \$Details		reservationInfo/ns0:creditCard/ns0:creditCardIr	nfo/ns0:PIN
		<b>*</b>	
4 40 To	· ¢DobitBogues	st.saleInfo/ns3:PIN	
4.40. 10	. preblikeques	it.salemo/nss.rm	
		♦	
4.41. Co	ру		
		<u> </u>	
4.42. Fro	om: 'carReserva	ation'	
		<b>♦</b>	
4.43. To	: \$DebitReques	st.saleInfo/ns3:transactionName	
		<b>♦</b>	
4.44. Co	pv		
	.,		
		=	
4.45.5			
4.45. Fro		ervices.reservationInfo/ns0:rental/ns0:rate/ns0:	rateValue, ")
•			. ,
		♦	

<b>♦</b>	
ke 'DebitInvokation'	
name DebitInvokation partnerLink CreditCardService	
operation DebitCardSale	
portType tns:CreditCardWSDLPor	ortTyne
inputVariable DebitRequest	лттурс
outputVariable DebitResponse	
,	
2'	
name It2	
name If2  leanExpr: \$DebitResponse.saleStatus = 'Done!	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done	e!'
name If2	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done!	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done!	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done!	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done' uence 'Sequence6'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done!  uence 'Sequence6'  Sequence6	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done' uence 'Sequence6'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done!  uence 'Sequence6'  Sequence6	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done' uence 'Sequence6'  name Sequence6  gn 'Assign5'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done' uence 'Sequence6'  name Sequence6  ign 'Assign5'	e!'
leanExpr: \$DebitResponse.saleStatus = 'Done' uence 'Sequence6'  name Sequence6  gn 'Assign5'	e!'

erationRequest.rentalInfo/ns1:vehic	le/ns1:brand
<b>\$</b>	
=	
rices.reservationInfo/ns0:rental/ns0:	vehicle/ns0:
<b>*</b>	
erationRequest.rentalInfo/ns1:vehic	le/ns1:color
<b>♦</b>	
=	
= vices.reservationInfo/ns0:rental/ns0:	rate/ns0:type
<del>-</del>	rate/ns0:type
	= vices.reservationInfo/ns0:rental/ns0:  erationRequest.rentalInfo/ns1:vehic

	=
62. Fro	om: \$DetailsOfAllServices.reservationInfo/ns0:rental/ns0:rate/ns0:cod
	♦
00 T-	
63. 10	: \$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:codes
	♦
64. Co	ру
	=
	_
65 Fra	
JU. 1 10	om: \$DetailsOfAllServices.reservationInfo/ns0:rental/ns0:rate/ns0:rate
50. 110	om: \$DetailsOfAllServices.reservationInfo/ns0:rentai/ns0:rate/ns0:rate
	om: \$DetailsOfAllServices.reservationInfo/ns0:rentai/ns0:rate/ns0:rate
J. 110	
	<b>♦</b>
	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
	<b>♦</b>
66. To	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To 67. Co	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To 67. Co 68. Fro	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue
66. To 67. Co 68. Fro	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue  py  =
66. To 67. Co 68. Fro	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rateValue  py  =

4.69. To: \$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:promotionalCodes

	♦
.70. Co <sub>l</sub>	oy en la company de la comp
	=
.71. Fro	m:
Details	OfAllServices.reservationInfo/ns0:rental/ns0:rate/ns0:rank/ns0:leisure
	<b>♦</b>
1.72. To:	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rank/ns1:leis
	♦
4.73. Co <sub>l</sub>	ру
	=
4.74. Fro	m:
\$Details	OfAllServices.reservationInfo/ns0:rental/ns0:rate/ns0:rank/ns0:corporate
	♦
4 75 To:	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:rank/ns1:co
	<b>♦</b>
	· ·
4.76. Co <sub>l</sub>	ру

	♦
4.78. To:	\$CarReservationOperationRequest.rentalInfo/ns1:rate/ns1:distance/ns1:limit
	♠
4.79. Co <sub>l</sub>	ру
	=
4.80. Fro \$Details	om: OfAllServices.reservationInfo/ns0:rental/ns0:rate/ns0:distance/ns0:unlimited
	♦
4.81. To: \$CarRes	ervationOperationRequest.rentalInfo/ns1:rate/ns1:distance/ns1:unlimited
	•
4.82. Co <sub>l</sub>	
	=
4.83. Fro	m: \$DetailsOfAllServices.reservationInfo/ns0:rental/ns0:rentalPeriod
4.84. To:	\$CarReservationOperationRequest.rentalInfo/ns1:rentalPeriod
4.85. Co <sub>l</sub>	ру
	=

	♦
\$CarReservation	OperationRequest.rentalInfo/ns1:PIN
wounteser varion	Operation/tequest.remailmo/ns/
	<b>♦</b>
oke 'SuccessCarl	ResevationInvoke'
name	SuccessCarResevationInvoke
partnerLink	CarReservationService
operation	CarRentalServiceOperation
portType	ns4:CarRentalServicePortType
inputVariable	CarReservationOperationRequest
outputVariable	CarReservationOperationResponse
<b>54'</b>	
<b>64'</b>	
name	₩  If4
name	₩  If4
name	
name  pleanExpr: \$CarR	If4 eservationOperationResponse.rentalingStatus
name	If4 eservationOperationResponse.rentalingStatus
name  pleanExpr: \$CarR	If4 eservationOperationResponse.rentalingStatus

	name	f1
4.93. Ass	sign 'Assign7'	
	name	Assign7
4.94. Cop	by	
		=
4.05. 5**		
4.95. Fro		onInfo/ns0:creditCard/ns0:creditCardInfo/ns0:PIN
<b>*</b>		
		<b>♦</b>
		· · · · · · · · · · · · · · · · · · ·
4.96. To:	\$DebitCardSaleReques	stForHotelReservation.saleInfo/ns3:PIN
		<b>\lambda</b>
4.97. Cop	by	
		=
4.00 =		
4.98. Fro	m: 'hotelReservation'	
		<b>♦</b>
4.99. To:	\$DebitCardSaleReques	stForHotelReservation.saleInfo/ns3:transactionNam
	,	
		·
4.100. Co	рру	
		=

	<b>♦</b>
, ¢DobitCordSo	aPaguastEarHatalPasarvation calcinfo/nc2:novma
. Debitoardoa	eRequestForHotelReservation.saleInfo/ns3:payme
	<b>\phi</b>
roke 'HotelRese	rvationDebitCard'
TORE HOLLINGSC	TVation Debitoura
name	HotelReservationDebitCard
partnerLink	CreditCardService
operation	DebitCardSale
portType	ns5:CreditCardWSDLPortType
inputVariable	DebitCardSaleRequestForHotelReservation
outputVariable	DebitCardSaleResponseForHotelReservation
name	If5
	If5 bitCardSaleResponseForHotelReservation.saleStar
	bitCardSaleResponseForHotelReservation.saleSta
ooleanExpr: \$De	bitCardSaleResponseForHotelReservation.saleSta
ooleanExpr: \$De	bitCardSaleResponseForHotelReservation.saleSta

	name	Assign10	
4 400 C			
4.108. C	ору		
		=	
		_	
4.109. Fi	rom:		
\$Details	OfAllServices.re	eservationInfo/ns0:hotelReservationApplication/ns0:date	
		<b>\( \rightarrow \)</b>	
4 440 T			
4.110. To \$HotelR		_OperationRequest.hotelReservationRequest/ns6:date	
<b>V</b>			
		<u> </u>	
		·	
4.111. C	ору		
		=	
4.112. Fi		eservationInfo/ns0:hotelReservationApplication/ns0:dateR	Dongo
<b>Details</b>	OTAIISEI VICES.IE	servationimo/riso.noterneservationApplication/riso.daten	Carrye
		<u></u>	
4.113. To	o:		
\$HotelR	eservationWSDL	_OperationRequest.hotelReservationRequest/ns6:dateRai	nge
		<b>♦</b>	
4.114. C	ору		
		=	

4.115. From:

\$DetailsOfAllServices. reservation Info/ns0: hotel Reservation Application/ns0: price Range

	♦	
4.116. To	:	
	servationWSDLOperationRequest.hotelReservationRequest/ns6:priceR	Range
<b>4</b> 110101110		
	<b>♦</b>	
4.117. Co	ναν	
	=	
4.118. Fro	om:	
\$DetailsC	· OfAllServices.reservationInfo/ns0:hotelReservationApplication/ns0:pric	e:
<b>,</b>		
	♦	
4.119. To	:	
\$HotelRe	servationWSDLOperationRequest.hotelReservationRequest/ns6:price	
•		
	♦	
4.120. Co	γα	
_		
	=	
4.121. Fro	om:	
\$DetailsC	OfAllServices.reservationInfo/ns0:hotelReservationApplication/ns0:roor	mTypes
_		
	♦	
4.122. To		
	servationWSDLOperationRequest.hotelReservationRequest/ns6:roomT	Гуреѕ
	,	<b>71</b>
	♦	

I.123. Copy		
	=	
404 From:		
124. From:	vetion Info/2004 betal Passay etion An	unlication/na0.raamBr
regular:	vationInfo/ns0:hotelReservationAp	phication/fiso.roomka
egulai		
	<b>♦</b>	
125. To:		
HotelReservationWSDLOp	erationRequest.hotelReservationR	equest/ns6:roomRate
egular		
	<b>→</b>	
	<u> </u>	
.126. Copy		
. 120. Сору		
	=	
.127. From:		
	vationInfo/ns0:hotelReservationAp	plication/ns0:roomRa
0:highClass		
	<b>→</b>	
.128. To:		
	perationRequest.hotelReservationR	equest/ns6:roomRate
nighClass	ciationito que stinotente ser vationit	equestrisooomikate
	<b>\$</b>	
.129. Copy		
	=	

	<b>*</b>	
31. To:		
otelReservationWSDL yone	OperationRequest.hotelReservationR	equest/ns6:roomRa
	<b>\( \rightarrow\)</b>	
32. Copy		
	=	
33. From: etailsOfAllServices.re	servationInfo/ns0:hotelReservationAp	plication/ns0:servic
	<b>*</b>	
34. To: otelReservationWSDL	.OperationRequest.hotelReservationR	equest/ns6:services
	<b>♦</b>	
35. Copy		
	=	
36. From:		
etailsOfAllServices.re	servationInfo/ns0:hotelReservationAp	plication/ns0:ameni
	•	

	♦	
38. Сору		
	=	
39. From:		
etailsOfAllServi	ces.reservationInfo/ns0:creditCard/ns0:creditCardIn	fo/ns0:PIN

### 4.141. Invoke 'InvokeHotelReservationService'

name	InvokeHotelReservationService		
partnerLink	HotelReservation		
operation	HotelReservationWSDLOperation		
portType	tns:HotelReservationWSDLPortType		
inputVariable	HotelReservationWSDLOperationRequest		
outputVariable	HotelReservationWSDLOperationResponse		

#### 4.142. If 'If6'

	₩
name	If6

# 4.143. BooleanExpr:

\$HotelReservationWSDLOperationResponse.hotelReservationResponse = ('Done! There are reservations for this CreditCard 'or 'Done!')

4.144. Se	equence 'Sequence12'	
	name	Sequence12
	Indino	
4.145. As	ssign 'Assign12'	
	name	Assign12
		, <u>g</u>
4.146. Co	рру	
		=
		_
4.147. Fr	om:	
		onInfo/ns0:flightServiceInformation/ns0:destination/ns0:
country		
		<b>→</b>
4.148. To	):	
		ntServiceInformation/ns7:destination/ns7:country
		·
		<b>♦</b>
4 4 4 0 0	<b></b>	
4.149. Co	рру	
		=

\$DetailsOfAllServices. reservation Info/ns0: flight Service Information/ns0: destination/ns0:

4.150. From:

city

4.151. To	o: \$ReserveFlightTripRequest.flightServiceInformation/ns7:destination/r	ıs7:city
4.152. Co	ору	
	=	
4.153. Fr	om: OfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:tripDate	
<b>Details</b>		
4.154. To	b: \$ReserveFlightTripRequest.flightServiceInformation/ns7:tripDate	
	•	
4.155. Co		
	=	
4.156. Fr	om: OfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:clientPre	eference
s/ns0:air		
4.157. To \$Reserve	o: eFlightTripRequest.flightServiceInformation/ns7:clientPreferences/ns7:a	airlines

4.158. Copy
_
=
4.450 5
4.159. From:  *Details Of A II Services recervation Info/ns Outlight Service Information /ns Outlight Brotores
\$DetailsOfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:clientPreferences/ns0:flightType
3/130.mgmrype
•
4.160. To:
\$ReserveFlightTripRequest.flightServiceInformation/ns7:clientPreferences/ns7:flightTpe
pe
<b>♦</b>
4.161. Copy
=
4.162. From:
\$DetailsOfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:clientPreference
s/ns0:classDegree
♦
4.163. To:
\$ReserveFlightTripRequest.flightServiceInformation/ns7:clientPreferences/ns7:classD
gree
♦
4.164. Copy
_

4.165. Fr	om:	
\$Details	OfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:passeng	er/ns0:
number	OfPassenger	
	<b>♦</b>	
4.166. To	<b>)</b> :	
\$Reserve	eFlightTripRequest.flightServiceInformation/ns7:passenger/ns7:number	OfPass
enger		
4.167. Co	ору	
	=	
4.168. Fr	rom:	
	OfAllServices.reservationInfo/ns0:flightServiceInformation/ns0:passeng	or/ne∩:t
	issengers	GI/IISU.t
уреон а		
	♦	
4.169. To	o:	
	eFlightTripRequest.flightServiceInformation/ns7:passenger/ns7:typeOfF	Passeng
ers		accong
4.170. ln	voke 'FlightReservationInvokation'	

name	FlightReservationInvokation		
partnerLink	FlightReservation		
operation	ReserveFlightTrip		
portType	tns:FlightServiceWSDLPortType		
inputVariable	ReserveFlightTripRequest		
outputVariable	ReserveFlightTripResponse		

#### 4.171. Assign 'returnCreditCardSaleResponse'

name	returnCreditCardSaleResponse	

#### 4.172. Copy

	_	

#### 4.173. From:

concat(\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:passenger/ns7:typeOfPassengers,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:clientPreferences/ns7:flightType,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:destination/ns7:country,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7: destination/ns7:city,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:tripDate,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:passenger/ns7:numberOfPassenger,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:clientPreferences/ns7:airlines,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:flightServiceInformation/ns7:clientPreferences/ns7:classDegree,

\$ReserveFlightTripResponse.flightServiceInformation/ns7:status)



#### 4.174. To

♦	
variable	ReplyFromCompsitionService
part result	

#### 4.175. Reply 'ReplyToClient'

<b>₽</b>		
name ReplyToClient		
partnerLink Customer		
operation ReservationOperation		
portType tns:CompositeServiceWSDLPortType		
variable ReplyFromCompsitionService		

#### 4.176. Else

	L.
	•
	<u>L</u>

# 4.177. Sequence 'Sequence11'

name	Sequence11	

# 4.178. Assign 'Assign11'

name	Assign11	

### 4.179. Copy

4.180. From: concat('the reservations has been canceled beacause you have got the same one before',

\$HotelReservationWSDLOperationResponse.hotelReservationResponse)



#### 4.181. To

♦	
variable	ReplyFromCompsitionService
part	result

# 4.182. Reply 'unssuccessSavingForHotelReservation'

₽		
name unssuccessSavingForHotelReservation		
partnerLink Customer		
operation ReservationOperation		
portType tns:CompositeServiceWSDLPortType		
variable	ReplyFromCompsitionService	

partnerLink	
operation	ReservationOperation
portType	tns:CompositeServiceWSDLPortType
variable	ReplyFromCompsitionService
Iself	
	≪
ooleanExpr. \$De	bitCardSaleResponseForHotelReservation.saleSta
equence 'Sequer	nce8'
	nce8'
equence 'Sequer	
	Sequence8
name ssign 'Assign8'	Sequence8
name	Sequence8
name ssign 'Assign8'	Sequence8

**\$DebitCardSaleResponseForHotelReservation.saleStatus)** 

<b>*</b>

#### 4.189. To

♦	
variable	ReplyFromCompsitionService
part result	

# 4.190. Reply 'repeatedReservation'

€		
name repeatedReservation		
partnerLink Customer		
operation ReservationOperation		
portType tns:CompositeServiceWSDLPortType		
variable	ReplyFromCompsitionService	

#### 4.191. Else

II.
Br and the second secon
al and the second secon
11.
·

### 4.192. Sequence 'Sequence9'

name Sequence9		

# 4.193. Assign 'Assign9'

name	Assign9	

### 4.194. Copy

	=	

4.195. From: concat(\$DebitCardSaleResponseForHotelReservation.saleStatus, 'Insufficient Fund')

	♦
_	

#### 4.196. To

♦		
variable ReplyFromCompsitionService		
part	result	

# 4.197. Reply 'InsufficientFundForHotelReservation'

<b>₽</b>			
name	InsufficientFundForHotelReservation		
partnerLink Customer			
operation ReservationOperation			
portType tns:CompositeServiceWSDLPortType			
variable	variable ReplyFromCompsitionService		

4 4	_			_	
71 7		v	_		_

II.
b and the second
All
<b>▼</b>

# 4.199. Sequence 'Sequence7'

name	Sequence7	

### 4.200. Assign 'Assign6'

name	Assign6	

# 4.201. Copy

	=	

4.202. From: concat('Something got wrong during in Car Reservation Operation', \$CarReservationOperationResponse.rentalingStatus)

	<b>♦</b>
	<u></u>
variable	ReplyFromCompsitionService
part	result
nly 'UneucoseC	arPosoryationOperation!
ply Unsuccesso	arReservationOperation'
	<b>₽</b>
name	UnsuccessCarReservationOperation
partnerLink	Customer
operation	ReservationOperation
portType	tns:CompositeServiceWSDLPortType
variable	ReplyFromCompsitionService
self	
	₩
	itResponse.saleStatus = 'is not existed'
oleanExpr: \$Deb	
oleanExpr: \$Deb	
oleanExpr: \$Deb	

# 4.208. Assign 'Assign3'

name	Assign3	

	=	
From: concat('Credit Card that you use is not existed', tResponse.saleStatus)		
	<b>→</b>	
¯o		
	<u> </u>	
variable	ReplyFromCompsitionService	
part	result	
	<b>₽</b>	
name	CreditIsNotExistedForCardReservation	
partnerLink	CreditIsNotExistedForCardReservation Customer	
partnerLink operation	CreditIsNotExistedForCardReservation Customer ReservationOperation	
partnerLink operation portType	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType	
partnerLink operation	CreditIsNotExistedForCardReservation Customer ReservationOperation	
partnerLink operation portType	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType	
partnerLink operation portType variable	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType	
partnerLink operation portType variable	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType ReplyFromCompsitionService	
partnerLink operation portType variable  Else  Sequence 'Sequence	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType ReplyFromCompsitionService	
partnerLink operation portType variable	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType ReplyFromCompsitionService	
partnerLink operation portType variable  Else  Sequence 'Sequence	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType ReplyFromCompsitionService	
partnerLink operation portType variable  Sequence 'Sequence name	CreditIsNotExistedForCardReservation Customer ReservationOperation tns:CompositeServiceWSDLPortType ReplyFromCompsitionService	

	name	113	
4.216. Bo	ooleanExpr: \$DebitR	Response.saleStatus = 'Insufficient Fund'	
4 217 Se	equence 'Sequence5	<b>;</b>	
7.2177.00	quonos osquenos	<b>,</b>	
		$\odot$	
	name	Sequence5	
	- Idino	0044011000	
4.218. As	ssign 'Assign4'		
	name	Assign4	
		<del>-</del>	
4.219. Co	ру		
		=	
4.000 E.			
4.220. Fr	om		
		<b>♦</b>	
	vorioblo		
	variable	DebitResponse	
	part	saleStatus	
4 004 T			
4.221. To			
♦			
	variable	ReplyFromCompsitionService	

# 4.222. Reply 'InsufficientFundReply'

part

<b>₽</b>		
name InsufficientFundReply		
partnerLink Customer		

result

operation	ReservationOperation
portType	tns:CompositeServiceWSDLPortType
variable	ReplyFromCompsitionService

- 4	2	•	_	_	_
4		, «	_	c	_
-			 _		Œ

k
1

### 4.224. Sequence 'Sequence2'

name Sequence2	

# 4.225. Assign 'Assign1'

name	Assign1	

# 4.226. Copy

· ·	
· ·	

# 4.227. From: concat('Error inCreditCardSale', \$CreditCardSaleResponse.creditStatus)

<b>*</b>

#### 4.228. To

♦	
variable	ReplyFromCompsitionService
part	result

# 4.229. Reply 'ErrorReply'

<b>→</b>		
name	ErrorReply	
partnerLink	Customer	

operation	ReservationOperation
portType	tns:CompositeServiceWSDLPortType
variable	ReplyFromCompsitionService