



Node A has found that nodes [B, C] hold replicas and nodes [D] does not. Node A choose to send the request to node B

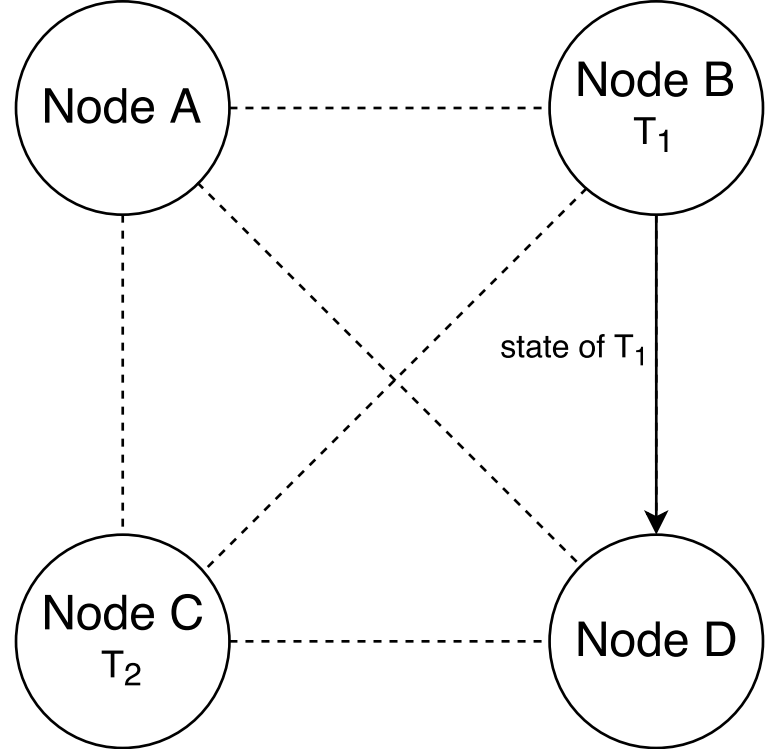

Node B receives the replication request and takes a snapshot of the replica's state, and sends it to the node included in the request (D)

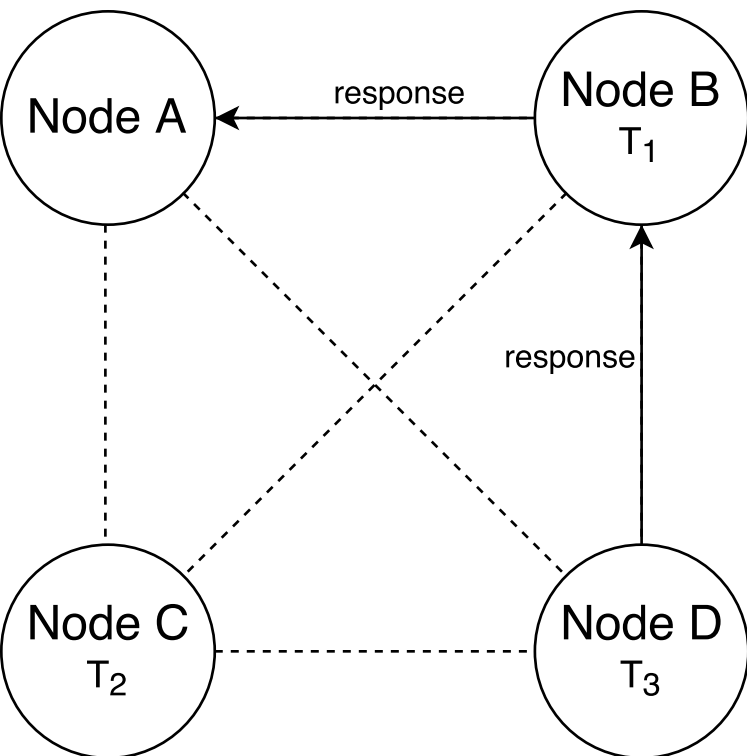

Node D creates a new replica from the received state and sends a response. Node B forwards the response to the requesting node.

