

Write a program to demonstrate status of key on an Applet window such as KeyPressed, KeyReleased, KeyUp, KeyDown

Demo.java

```
import java.applet.Applet;
```

```
import java.awt.Color;
```

```
import java.awt.Graphics;
```

```
import java.awt.event.KeyEvent;
```

```
import java.awt.event.KeyListener;
```

```
public class Demo extends Applet implements KeyListener {
```

```
    String msg = "";
```

```
    public Demo() {
```

```
    }
```

```
    public void init() {
```

```
        this.setBackground(Color.pink);
```

```
        this.setFocusable(true);
```

```
        this.addKeyListener(this);
```

```
    }
```

```
    public void keyPressed(KeyEvent var1) {
```

```
        this.msg = "Key Pressed";
```

```
        this.repaint();
```

```
    }
```

```
    public void keyReleased(KeyEvent var1) {
```

```
        this.msg = "Key Released";
```

```
        this.repaint();
```

```
    }
```

```
public void keyTyped(KeyEvent var1) {  
    this.msg = "Key Typed";  
    this.repaint();  
}
```

```
public void paint(Graphics var1) {  
    var1.drawString(this.msg, 200, 50);  
}  
}
```

demo.html

<html>

<body>

<applet code="Demo.class" width="400" height="300">

</applet>

</body>

</html>

Type:


javac Demo.java

Step 4: Run Applet


Type:

appletviewer demo.html


in dem.html file

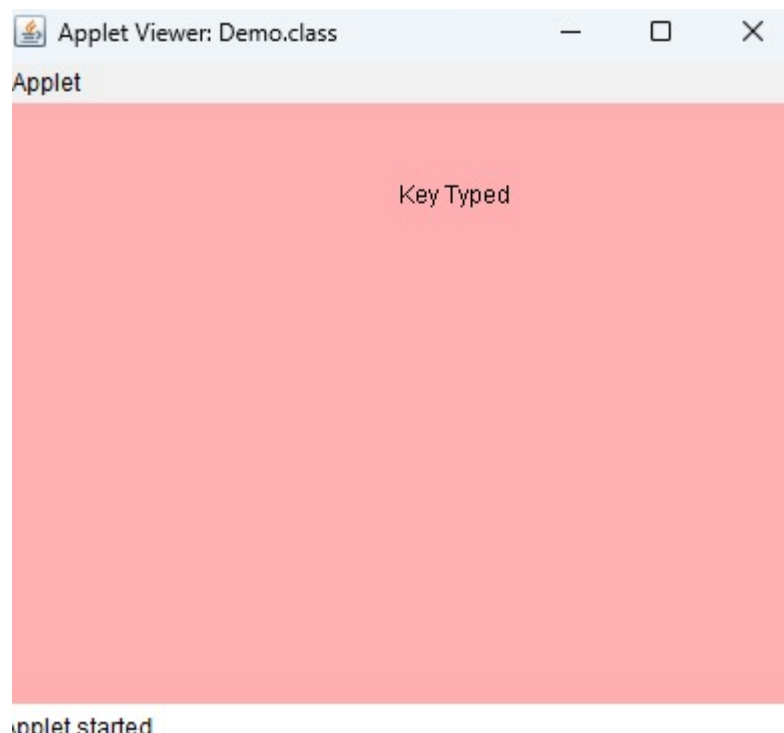

Applet started.

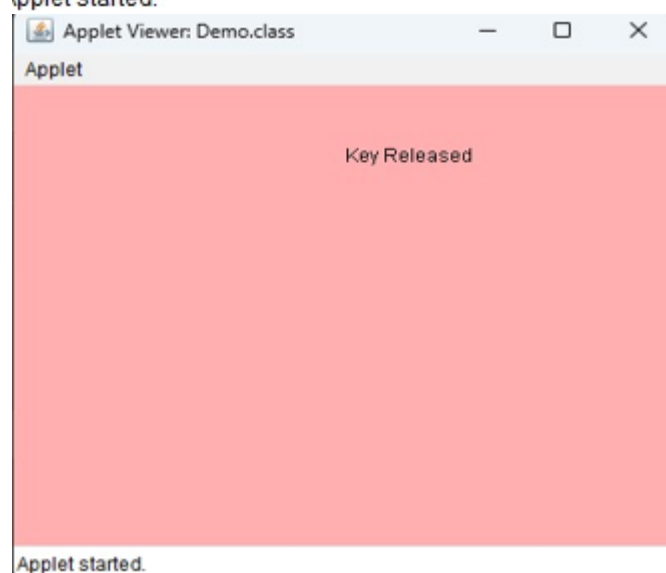

Applet started.

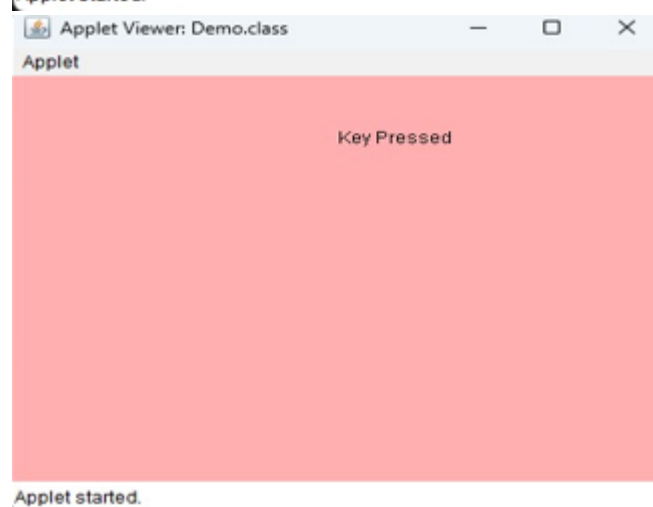

Applet started.

