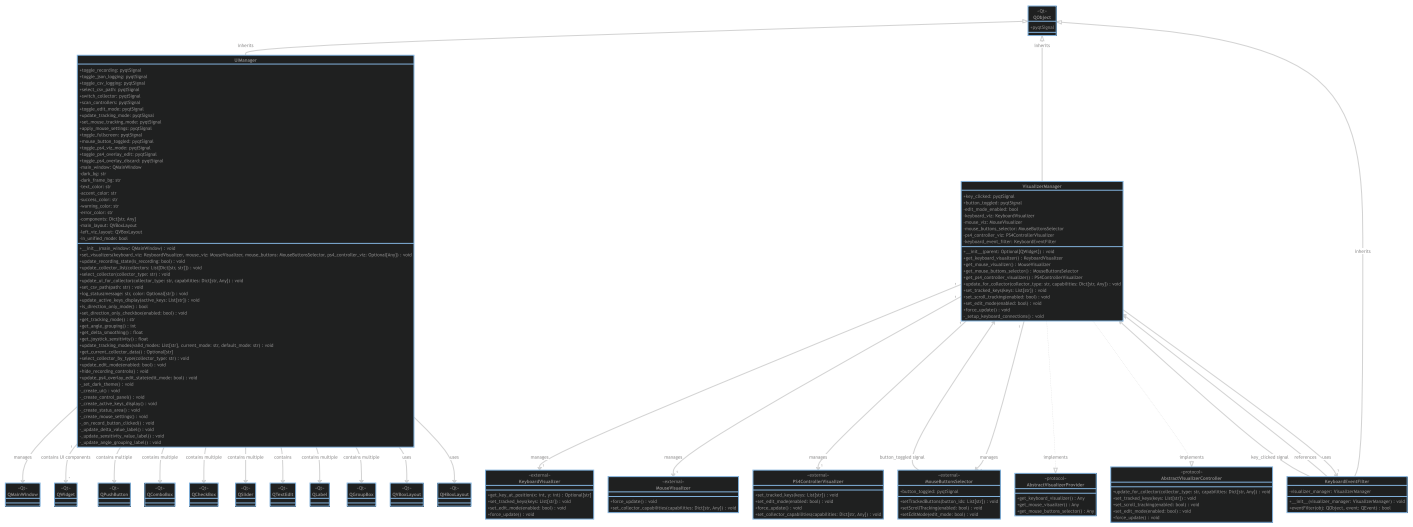

QObject
pyqtSignal
inherits
UIManager
-toggle_recording: pyqtSignal
-toggle_own_logging: pyqtSignal
-toggle_cm_logging: pyqtSignal
-select_csv_path: pyqtSignal
-switch_collector: pyqtSignal
-scan_controllers: pyqtSignal
-toggle_vis_mouse: pyqtSignal
-toggle_mouse_tracking: pyqtSignal
-set_mouse_tracking_mode: pyqtSignal
-apply_mouse_settings: pyqtSignal
-toggle_fullscreen: pyqtSignal
-mouse_button_toggled: pyqtSignal
-toggle_ps4_cb_mode: pyqtSignal
-toggle_ps4_overlay_edit: pyqtSignal
-toggle_ps4_overlay_closed: pyqtSignal
-main_window: QMainWindow
-dark_bg: str
-dark_frame_bg: str
-text_color: str
-accent_color: str
-success_color: str
-warning_color: str
-error_color: str
-components: Dict[str, Any]
-main_layout: QVBoxLayout
-left_vis_layout: QVBoxLayout
-is_unified_mode: bool
+__init__(main_window: QMainWindow) : void
+set_visualizers(keyboard_vis: KeyboardVisualizer, mouse_vis: MouseVisualizer, mouse_buttons: MouseButtonsDetector, ps4_controller_vis: Optional[Any]) : void
+update_recording_status(is_recording: bool) : void
+update_collector_list(collectors: List[Tuple[str, str]]) : void
+select_collector(collector_type: str) : void
+update_ui_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_csv_path(path: str) : void
+log_status(message: str, color: Optional[str]) : void
+update_active_keys_display(active_keys: List[str]) : void
+is_direction_only_mode() : bool
+set_direction_only_check(enabled: bool) : void
+get_tracking_mode() : str
+get_delta_mode() : str
+get_delta_sensitivity() : float
+get_joystick_sensitivity() : float
+update_tracking_mode(valid_modes: List[str], current_mode: str, default_mode: str) : void
+get_current_collector_data() : Optional[dict]
+select_collector_by_type(collector_type: str) : void
+update_edit_mode(enabled: bool) : void
+hide_recording_controls() : void
+update_ps4_overlay_edit_state(edit_mode: bool) : void
- _set_dark_theme() : void
- _create_ui() : void
- _create_control_panel() : void
- _create_active_keys_display() : void
- _create_mouse_settings() : void
- _create_mouse_settings_ui() : void
- _on_record_button_clicked() : void
- _update_delta_value_labels() : void
- _update_sensitivity_value_label() : void
- _update_angle_grouping_label() : void
VisualizerManager
+key_clicked: pyqtSignal
+button_toggled: pyqtSignal
-edit_mode_enabled: bool
-keyboard_vis: KeyboardVisualizer
-mouse_vis: MouseVisualizer
-mouse_buttons_selector: MouseButtonsSelector
-ps4_controller_vis: PS4ControllerVisualizer
-keyboard_event_filter: KeyboardEventFilter
+__init__(parent: Optional[QObject]) : void
+get_keyboard_visualizer() : KeyboardVisualizer
+get_mouse_visualizer() : MouseVisualizer
+get_mouse_buttons_selector() : MouseButtonsSelector
+get_ps4_controller_visualizer() : PS4ControllerVisualizer
+update_ui_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_tracked_keys(keys: List[str]) : void
+set_scroll_tracking(enabled: bool) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
- _setup_keyboard_connections() : void
inherits
manages
contains UI components
contains multiple
contains
uses
-external-
KeyboardVisualizer
+get_key_at_position(x: int, y: int) : Optional[str]
+set_tracked_keys(keys: List[str]) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
-external-
MouseVisualizer
+force_update() : void
+set_collector_type(collector_type: str, capabilities: Dict[str, Any]) : void
-external-
PS4ControllerVisualizer
+set_tracked_keys(keys: List[str]) : void
+set_edit_mode(enabled: bool) : void
+set_scroll_tracking(enabled: bool) : void
+set_collector_type(collector_type: str, capabilities: Dict[str, Any]) : void
button_toggled signal
-external-
MouseButtonsSelector
+force_toggle() pyqtSignal
+set_tracked_buttons(button_list: List[str]) : void
+set_edit_mode(enabled: bool) : void
+set_collector_type(collector_type: str, capabilities: Dict[str, Any]) : void
implements
-protocol-
AbstractVisualizerProvider
+get_keyboard_visualizer() : Any
+get_mouse_visualizer() : Any
+get_mouse_buttons_selector() : Any
implements
key_clicked signal
-protocol-
AbstractVisualizerController
+update_ui_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_tracked_keys(keys: List[str]) : void
+set_scroll_tracking(enabled: bool) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
reference
uses
KeyboardEventFilter
-visualizer_manager: VisualizerManager
+__init__(visualizer_manager: VisualizerManager) : void
+eventFilter(obj: QObject, event: QEvent) : bool