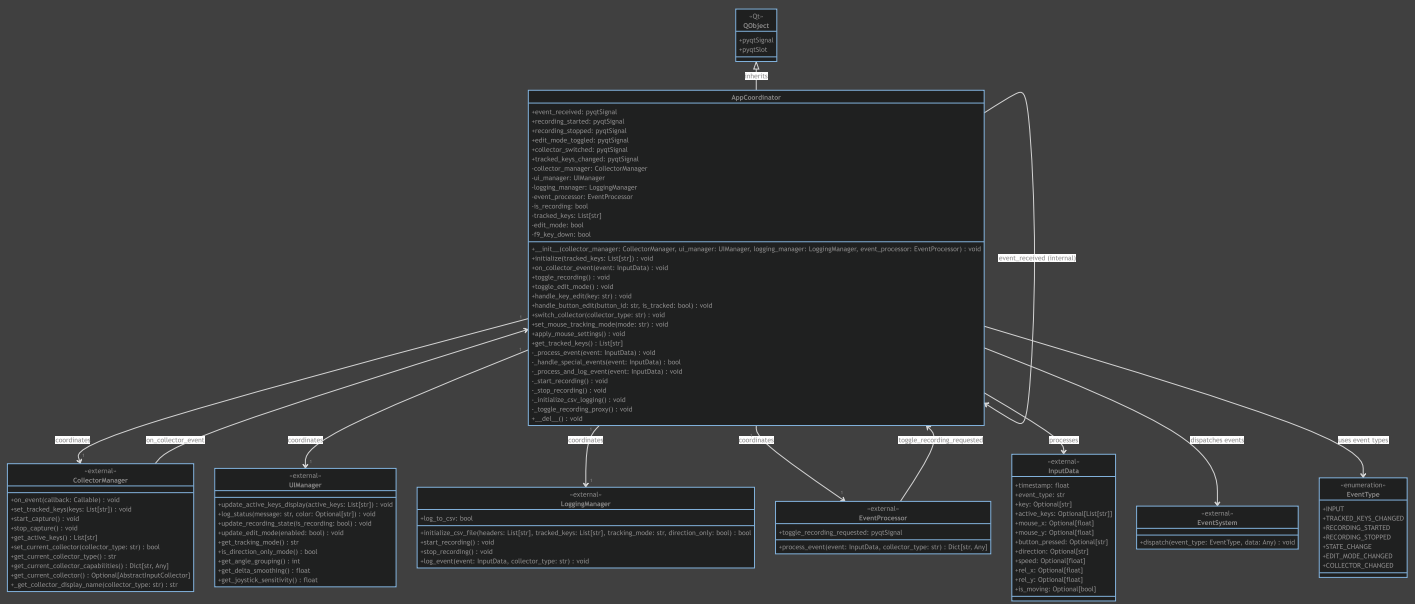

«Qt»
QObject
+pyqtSignal
+pyqtSlot
inherits
AppCoordinator
+event_received: pyqtSignal
+recording_started: pyqtSignal
+recording_stopped: pyqtSignal
+edit_mode_toggled: pyqtSignal
+collector_switched: pyqtSignal
+tracked_keys_changed: pyqtSignal
-collector_manager: CollectorManager
-ui_manager: UIManager
-logging_manager: LoggingManager
-event_processor: EventProcessor
-is_recording: bool
-tracked_keys: List[str]
-edit_mode: bool
-f9_key_down: bool
+__init__(collector_manager: CollectorManager, ui_manager: UIManager, logging_manager: LoggingManager, event_processor: EventProcessor) : void
+initialize(tracked_keys: List[str]) : void
+on_collector_event(event: InputData) : void
+toggle_recording() : void
+toggle_edit_mode() : void
+handle_key_edit(key: str) : void
+handle_button_edit(button_id: str, is_tracked: bool) : void
+switch_collector(collector_type: str) : void
+set_mouse_tracking_mode(mode: str) : void
+apply_mouse_settings() : void
+get_tracked_keys() : List[str]
-_process_event(event: InputData) : void
-_handle_special_events(event: InputData) : bool
-_process_and_log_event(event: InputData) : void
-_start_recording() : void
-_stop_recording() : void
-_initialize_csv_logging() : void
-_toggle_recording_proxy() : void
+__del__() : void
event_received (internal)
«coordinates»
on_collector_event
«coordinates»
«coordinates»
«coordinates»
toggle_recording_requested
«process»
«dispatches event»
«uses event type»
«external»
CollectorManager
+on_event(callback: Callable) : void
+set_tracked_keys(keys: List[str]) : void
+start_capture() : void
+stop_capture() : void
+get_active_keys() : List[str]
+set_current_collector(collector_type: str) : bool
+get_current_collector_type() : str
+get_current_collector_capabilities() : Dict[str, Any]
+get_current_collector() : Optional[AbstractInputCollector]
+_get_collector_display_name(collector_type: str) : str
«external»
UIManager
+update_active_keys_display(active_keys: List[str]) : void
+log_status(message: str, color: Optional[str]) : void
+update_recording_state(is_recording: bool) : void
+update_edit_mode(enabled: bool) : void
+get_tracking_mode() : str
+is_direction_only_mode() : bool
+get_angle_grouping() : int
+get_delta_smoothing() : float
+get_joystick_sensitivity() : float
«external»
LoggingManager
-log_to_csv: bool
+initialize_csv_file(headers: List[str], tracked_keys: List[str], tracking_mode: str, direction_only: bool) : bool
+start_recording() : void
+stop_recording() : void
-log_event(event: InputData, collector_type: str) : void
«external»
EventProcessor
+toggle_recording_requested: pyqtSignal
+process_event(event: InputData, collector_type: str) : Dict[str, Any]
«external»
InputData
+timestamp: float
+event_type: str
+key: Optional[str]
+active_keys: Optional[List[str]]
+mouse_x: Optional[float]
+mouse_y: Optional[float]
+button_pressed: Optional[str]
+direction: Optional[str]
+speed: Optional[float]
+rel_x: Optional[float]
+rel_y: Optional[float]
+is_moving: Optional[bool]
«external»
EventSystem
+dispatch(event_type: EventType, data: Any) : void
«enumeration»
EventType
+INPUT
+TRACKED_KEYS_CHANGED
+RECORDING_STARTED
+RECORDING_STOPPED
+STATE_CHANGE
+EDIT_MODE_CHANGED
+COLLECTOR_CHANGED