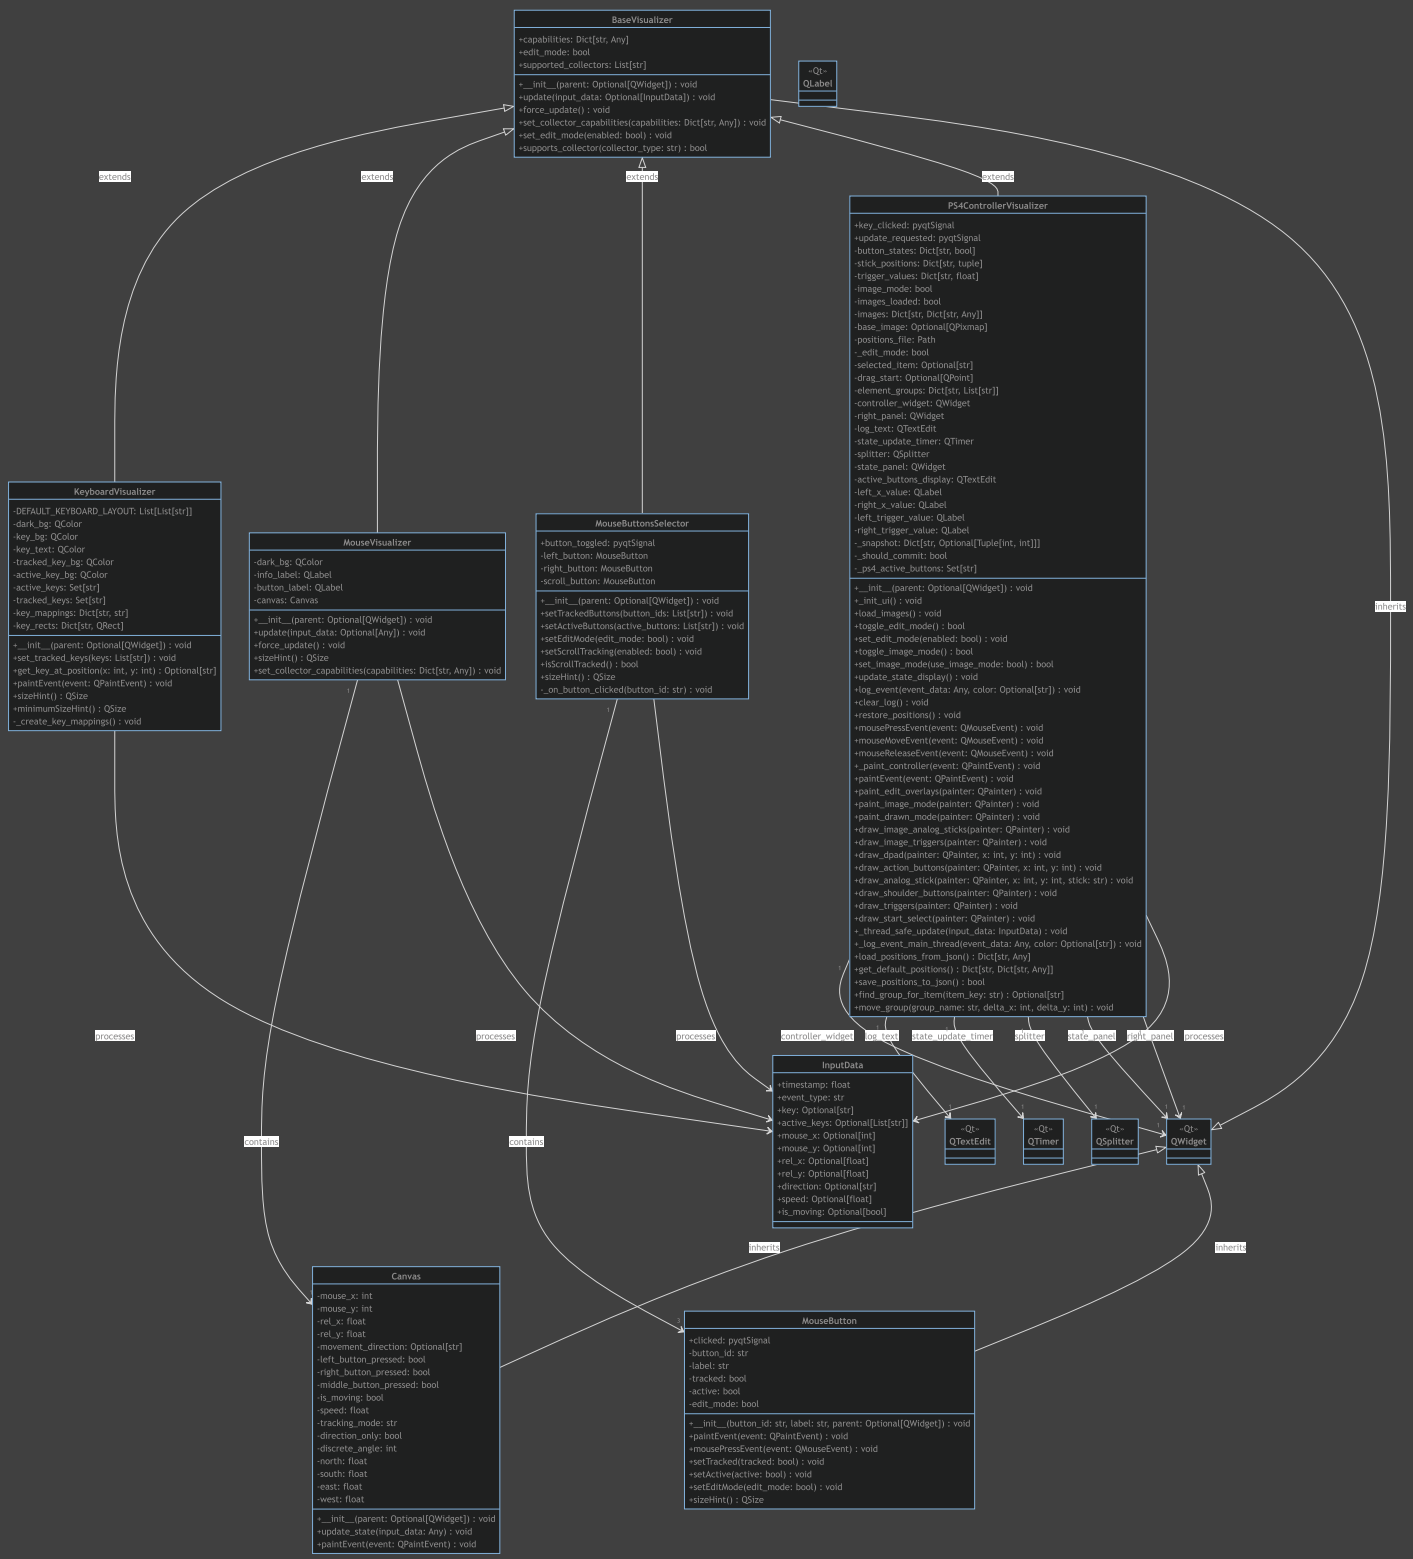

BaseVisualizer
+capabilities: Dict[str, Any]
+edit_mode: bool
+supported_collectors: List[str]
+__init__(parent: Optional[QWidget]) : void
+update(input_data: Optional[InputData]) : void
+force_update() : void
+set_collector_capabilities(capabilities: Dict[str, Any]) : void
+set_edit_mode(enabled: bool) : void
+supports_collector(collector_type: str) : bool
«Qt» QLabel
extends
extends
extends
extends
PS4ControllerVisualizer
+key_clicked: pyqtSignal
+update_requested: pyqtSignal
-button_states: Dict[str, bool]
-stick_positions: Dict[str, tuple]
-trigger_values: Dict[str, float]
-image_mode: bool
-images_loaded: bool
-images: Dict[str, Dict[str, Any]]
-base_image: Optional[QPixmap]
-positions_file: Path
-_edit_mode: bool
-selected_item: Optional[str]
-drag_start: Optional[QPoint]
-element_groups: Dict[str, List[str]]
-controller_widget: QWidget
-right_panel: QWidget
-log_text: QTextEdit
-state_update_timer: QTimer
-splitter: QSplitter
-state_panel: QWidget
-active_buttons_display: QTextEdit
-left_x_value: QLabel
-right_x_value: QLabel
-left_trigger_value: QLabel
-right_trigger_value: QLabel
-_snapshot: Dict[str, Optional[Tuple[int, int]]]
-_should_commit: bool
-_ps4_active_buttons: Set[str]
+__init__(parent: Optional[QWidget]) : void
+_init_ui() : void
+load_images() : void
+toggle_edit_mode() : bool
+set_edit_mode(enabled: bool) : void
+toggle_image_mode() : bool
+set_image_mode(use_image_mode: bool) : bool
+update_state_display() : void
+log_event(event_data: Any, color: Optional[str]) : void
+clear_log() : void
+restore_positions() : void
+mousePressEvent(event: QMouseEvent) : void
+mouseMoveEvent(event: QMouseEvent) : void
+mouseReleaseEvent(event: QMouseEvent) : void
+_paint_controller(event: QPaintEvent) : void
+paintEvent(event: QPaintEvent) : void
+paint_edit_overlays(painter: QPainter) : void
+paint_image_mode(painter: QPainter) : void
+paint_drawn_mode(painter: QPainter) : void
+draw_image_analog_sticks(painter: QPainter) : void
+draw_image_triggers(painter: QPainter) : void
+draw_dpad(painter: QPainter, x: int, y: int) : void
+draw_action_buttons(painter: QPainter, x: int, y: int) : void
+draw_analog_stick(painter: QPainter, x: int, y: int, stick: str) : void
+draw_shoulder_buttons(painter: QPainter) : void
+draw_triggers(painter: QPainter) : void
+draw_start_select(painter: QPainter) : void
+_thread_safe_update(input_data: InputData) : void
+_log_event_main_thread(event_data: Any, color: Optional[str]) : void
+load_positions_from_json() : Dict[str, Any]
+get_default_positions() : Dict[str, Dict[str, Any]]
+save_positions_to_json() : bool
+find_group_for_item(item_key: str) : Optional[str]
+move_group(group_name: str, delta_x: int, delta_y: int) : void
inherits
KeyboardVisualizer
-DEFAULT_KEYBOARD_LAYOUT: List[List[str]]
-dark_bg: QColor
-key_bg: QColor
-key_text: QColor
-tracked_key_bg: QColor
-active_key_bg: QColor
-active_keys: Set[str]
-tracked_keys: Set[str]
-key_mappings: Dict[str, str]
-key_rects: Dict[str, QRect]
+__init__(parent: Optional[QWidget]) : void
+set_tracked_keys(keys: List[str]) : void
+get_key_at_position(x: int, y: int) : Optional[str]
+paintEvent(event: QPaintEvent) : void
+sizeHint() : QSize
+minimumSizeHint() : QSize
-_create_key_mappings() : void
MouseVisualizer
-dark_bg: QColor
-info_label: QLabel
-button_label: QLabel
-canvas: Canvas
+__init__(parent: Optional[QWidget]) : void
+update(input_data: Optional[Any]) : void
+force_update() : void
+sizeHint() : QSize
+set_collector_capabilities(capabilities: Dict[str, Any]) : void
MouseButtonsSelector
+button_toggled: pyqtSignal
-left_button: MouseButton
-right_button: MouseButton
-scroll_button: MouseButton
+__init__(parent: Optional[QWidget]) : void
+setTrackedButtons(button_ids: List[str]) : void
+setActiveButtons(active_buttons: List[str]) : void
+setEditMode(edit_mode: bool) : void
+setScrollTracking(enabled: bool) : void
+isScrollTracked() : bool
+sizeHint() : QSize
-_on_button_clicked(button_id: str) : void
1
processes
processes
processes
controller_widget
log_text
state_update_timer
splitter
state_panel
right_panel
processes
InputData
+timestamp: float
+event_type: str
+key: Optional[str]
+active_keys: Optional[List[str]]
+mouse_x: Optional[int]
+mouse_y: Optional[int]
+rel_x: Optional[float]
+rel_y: Optional[float]
+direction: Optional[str]
+speed: Optional[float]
+is_moving: Optional[bool]
«Qt» QTextEdit
«Qt» QTimer
«Qt» QSplitter
«Qt» QWidget
contains
contains
inherits
inherits
Canvas
-mouse_x: int
-mouse_y: int
-rel_x: float
-rel_y: float
-movement_direction: Optional[str]
-left_button_pressed: bool
-right_button_pressed: bool
-middle_button_pressed: bool
-is_moving: bool
-speed: float
-tracking_mode: str
-direction_only: bool
-discrete_angle: int
-north: float
-south: float
-east: float
-west: float
+__init__(parent: Optional[QWidget]) : void
+update_state(input_data: Any) : void
+paintEvent(event: QPaintEvent) : void
MouseButton
+clicked: pyqtSignal
-button_id: str
-label: str
-tracked: bool
-active: bool
-edit_mode: bool
+__init__(button_id: str, label: str, parent: Optional[QWidget]) : void
+paintEvent(event: QPaintEvent) : void
+mousePressEvent(event: QMouseEvent) : void
+setTracked(tracked: bool) : void
+setActive(active: bool) : void
+setEditMode(edit_mode: bool) : void
+sizeHint() : QSize