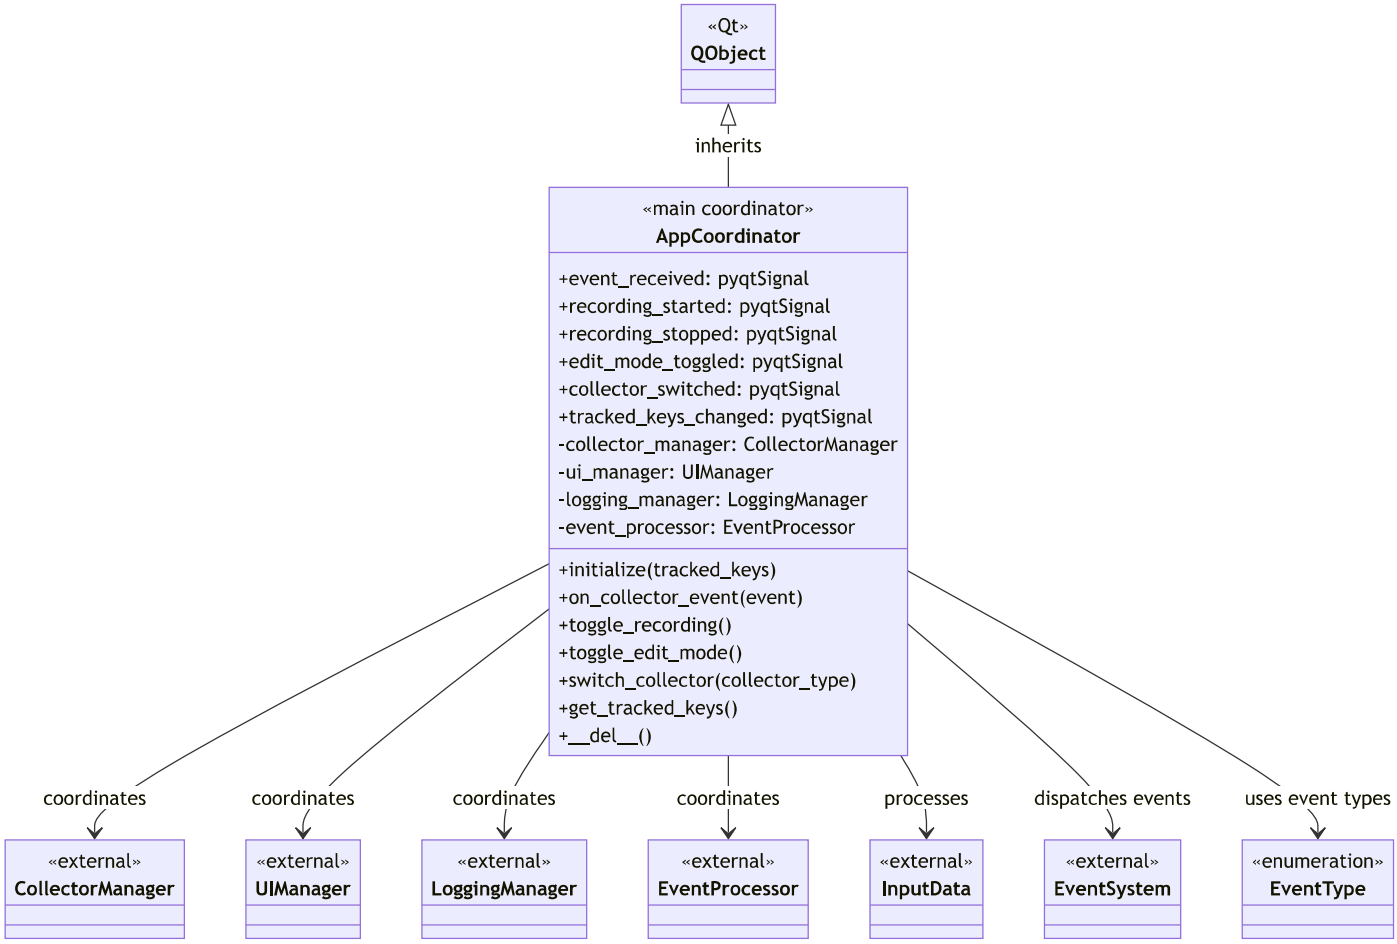

«Qt»
QObject
inherits
«main coordinator»
AppCoordinator
+event_received: pyqtSignal
+recording_started: pyqtSignal
+recording_stopped: pyqtSignal
+edit_mode_toggled: pyqtSignal
+collector_switched: pyqtSignal
+tracked_keys_changed: pyqtSignal
-collector_manager: CollectorManager
-ui_manager: UIManager
-logging_manager: LoggingManager
-event_processor: EventProcessor
+initialize(tracked_keys)
+on_collector_event(event)
+toggle_recording()
+toggle_edit_mode()
+switch_collector(collector_type)
+get_tracked_keys()
+__del__()
coordinates
coordinates
coordinates
coordinates
processes
dispatches events
uses event types
«external»
CollectorManager
«external»
UIManager
«external»
LoggingManager
«external»
EventProcessor
«external»
InputData
«external»
EventSystem
«enumeration»
EventType