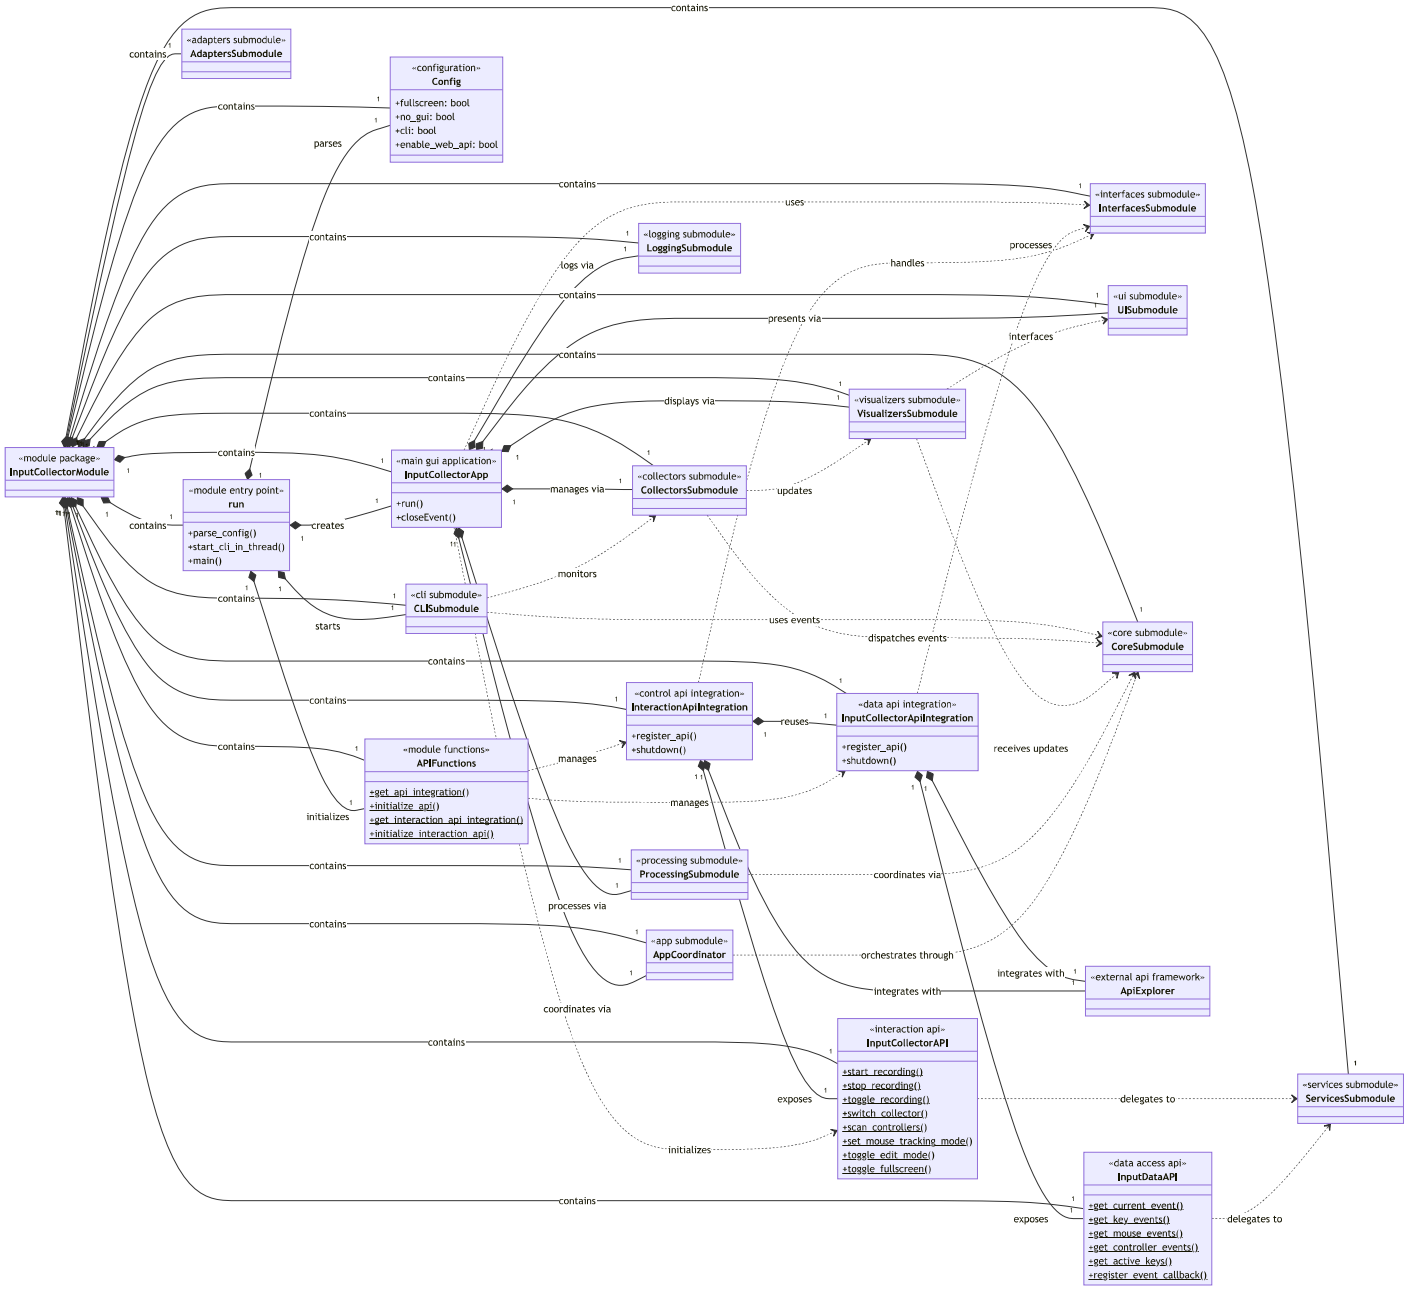

«adapters submodule»
AdaptersSubmodule
«configuration»
Config
+fullscreen: bool
+no_gui: bool
+cli: bool
+enable_web_api: bool
«interfaces submodule»
InterfacesSubmodule
«logging submodule»
LoggingSubmodule
«ui submodule»
UISubmodule
«visualizers submodule»
VisualizersSubmodule
«module package»
InputCollectorModule
«main gui application»
InputCollectorApp
+run()
+closeEvent()
«collectors submodule»
CollectorsSubmodule
«module entry point»
run
+parse_config()
+start_cli_in_thread()
+main()
«cli submodule»
CLISubmodule
«core submodule»
CoreSubmodule
«control api integration»
InteractionApiIntegration
+register_api()
+shutdown()
«data api integration»
InputCollectorApiIntegration
+register_api()
+shutdown()
«module functions»
APIFunctions
+get_api_integration()
+initialize_api()
+get_interaction_api_integration()
+initialize_interaction_api()
«processing submodule»
ProcessingSubmodule
«app submodule»
AppCoordinator
«external api framework»
ApiExplorer
«interaction api»
InputCollectorAPI
+start_recording()
+stop_recording()
+toggle_recording()
+switch_collector()
+scan_controllers()
+set_mouse_tracking_mode()
+toggle_edit_mode()
+toggle_fullscreen()
«services submodule»
ServicesSubmodule
«data access api»
InputDataAPI
+get_current_event()
+get_key_events()
+get_mouse_events()
+get_controller_events()
+get_active_keys()
+register_event_callback()
contains
parses
uses
logs via
handles
processes
presents via
interfaces
displays via
manages via
updates
creates
starts
monitors
uses events
dispatches events
reuses
receives updates
manages
initializes
coordinates via
processes via
orchestrates through
integrates with
exposes
delegates to