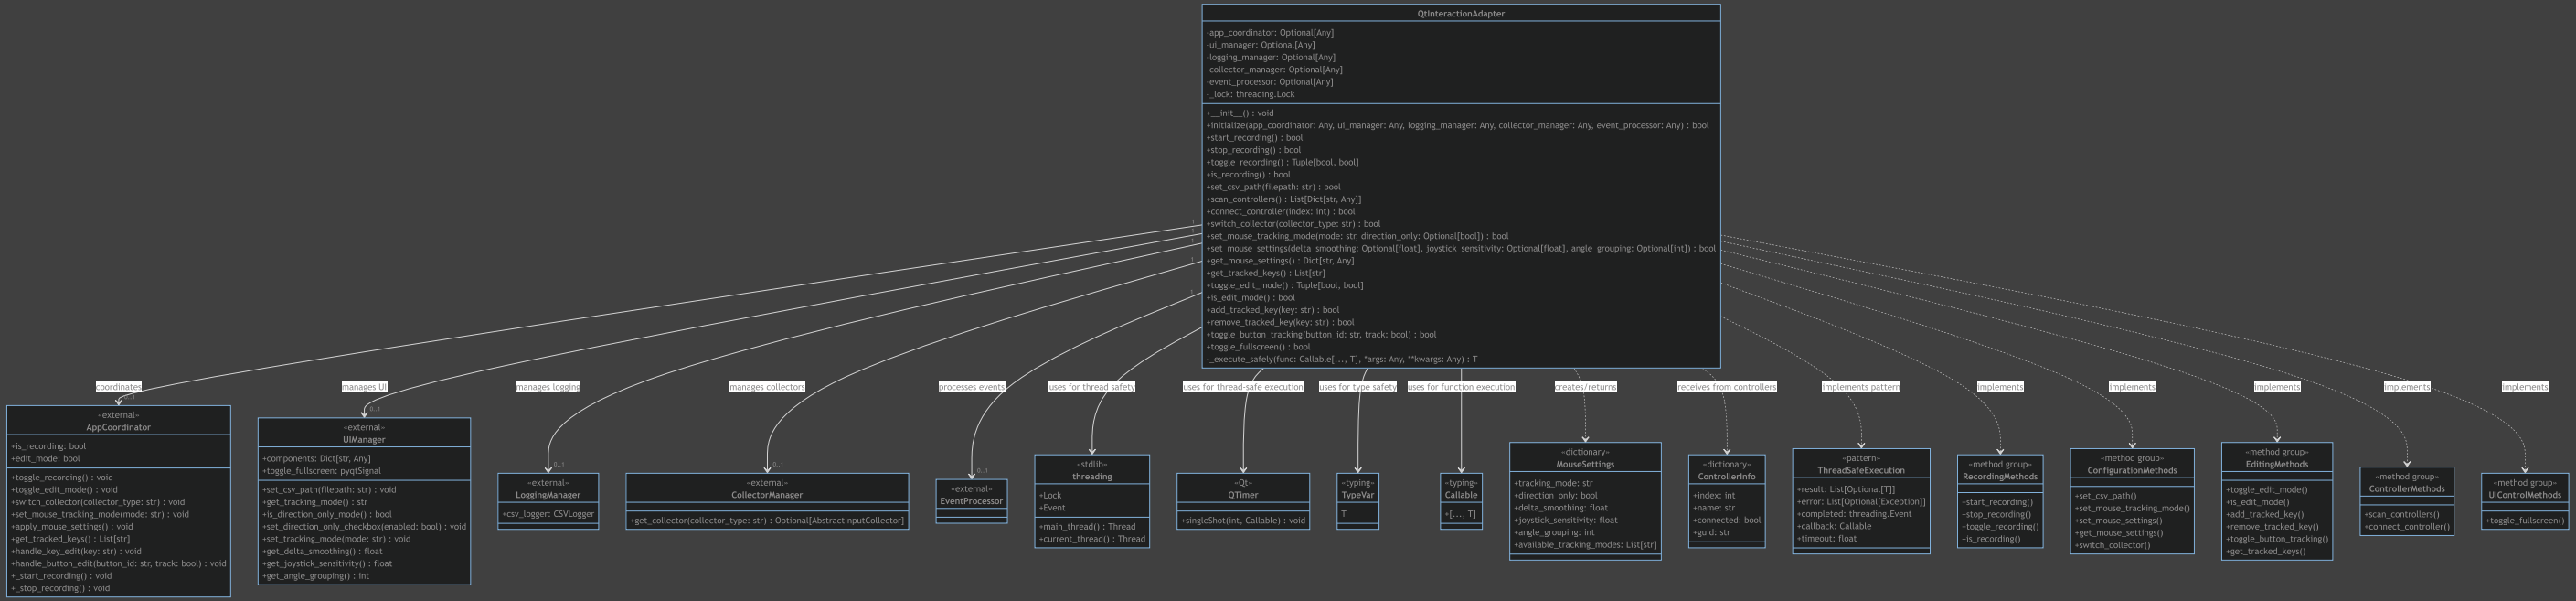
QtInteractionAdapter
-app_coordinator: Optional[Any]
-ui_manager: Optional[Any]
-logging_manager: Optional[Any]
-collector_manager: Optional[Any]
-event_processor: Optional[Any]
-_lock: threading.Lock
+__init__() : void
+initialize(app_coordinator: Any, ui_manager: Any, logging_manager: Any, collector_manager: Any, event_processor: Any) : bool
+start_recording() : bool
+stop_recording() : bool
+toggle_recording() : Tuple[bool, bool]
+is_recording() : bool
+set_csv_path(filepath: str) : bool
+scan_controllers() : List[Dict[str, Any]]
+connect_controller(index: int) : bool
+switch_collector(collector_type: str) : bool
+set_mouse_tracking_mode(mode: str, direction_only: Optional[bool]) : bool
+set_mouse_settings(delta_smoothing: Optional[float], joystick_sensitivity: Optional[float], angle_grouping: Optional[int]) : bool
+get_mouse_settings() : Dict[str, Any]
+get_tracked_keys() : List[str]
+toggle_edit_mode() : Tuple[bool, bool]
+is_edit_mode() : bool
+add_tracked_key(key: str) : bool
+remove_tracked_key(key: str) : bool
+toggle_button_tracking(button_id: str, track: bool) : bool
+toggle_fullscreen() : bool
-_execute_safely(func: Callable[..., T], *args: Any, **kwargs: Any) : T
1
1
1
1
1
1
coordinates
0..1
«external»
AppCoordinator
+is_recording: bool
+edit_mode: bool
+toggle_recording() : void
+toggle_edit_mode() : void
+switch_collector(collector_type: str) : void
+set_mouse_tracking_mode(mode: str) : void
+apply_mouse_settings() : void
+get_tracked_keys() : List[str]
+handle_key_edit(key: str) : void
+handle_button_edit(button_id: str, track: bool) : void
+_start_recording() : void
+_stop_recording() : void
manages UI
0..1
«external»
UIManager
+components: Dict[str, Any]
+toggle_fullscreen: pyqtSignal
+set_csv_path(filepath: str) : void
+get_tracking_mode() : str
+is_direction_only_mode() : bool
+set_direction_only_checkbox(enabled: bool) : void
+set_tracking_mode(mode: str) : void
+get_delta_smoothing() : float
+get_joystick_sensitivity() : float
+get_angle_grouping() : int
manages logging
0..1
«external»
LoggingManager
+csv_logger: CSVLogger
manages collectors
0..1
«external»
CollectorManager
+get_collector(collector_type: str) : Optional[AbstractInputCollector]
processes events
0..1
«external»
EventProcessor
uses for thread safety
«stdlib»
threading
+Lock
+Event
+main_thread() : Thread
+current_thread() : Thread
uses for thread-safe execution
«Qt»
QTimer
+singleShot(int, Callable) : void
uses for type safety
«typing»
TypeVar
T
uses for function execution
«typing»
Callable
+[..., T]
creates/returns
«dictionary»
MouseSettings
+tracking_mode: str
+direction_only: bool
+delta_smoothing: float
+joystick_sensitivity: float
+angle_grouping: int
+available_tracking_modes: List[str]
receives from controllers
«dictionary»
ControllerInfo
+index: int
+name: str
+connected: bool
+guid: str
implements pattern
«pattern»
ThreadSafeExecution
+result: List[Optional[T]]
+error: List[Optional[Exception]]
+completed: threading.Event
+callback: Callable
+timeout: float
implements
«method group»
RecordingMethods
+start_recording()
+stop_recording()
+toggle_recording()
+is_recording()
implements
«method group»
ConfigurationMethods
+set_csv_path()
+set_mouse_tracking_mode()
+set_mouse_settings()
+get_mouse_settings()
+switch_collector()
implements
«method group»
EditingMethods
+toggle_edit_mode()
+is_edit_mode()
+add_tracked_key()
+remove_tracked_key()
+toggle_button_tracking()
+get_tracked_keys()
implements
«method group»
ControllerMethods
+scan_controllers()
+connect_controller()
implements
«method group»
UIControlMethods
+toggle_fullscreen()