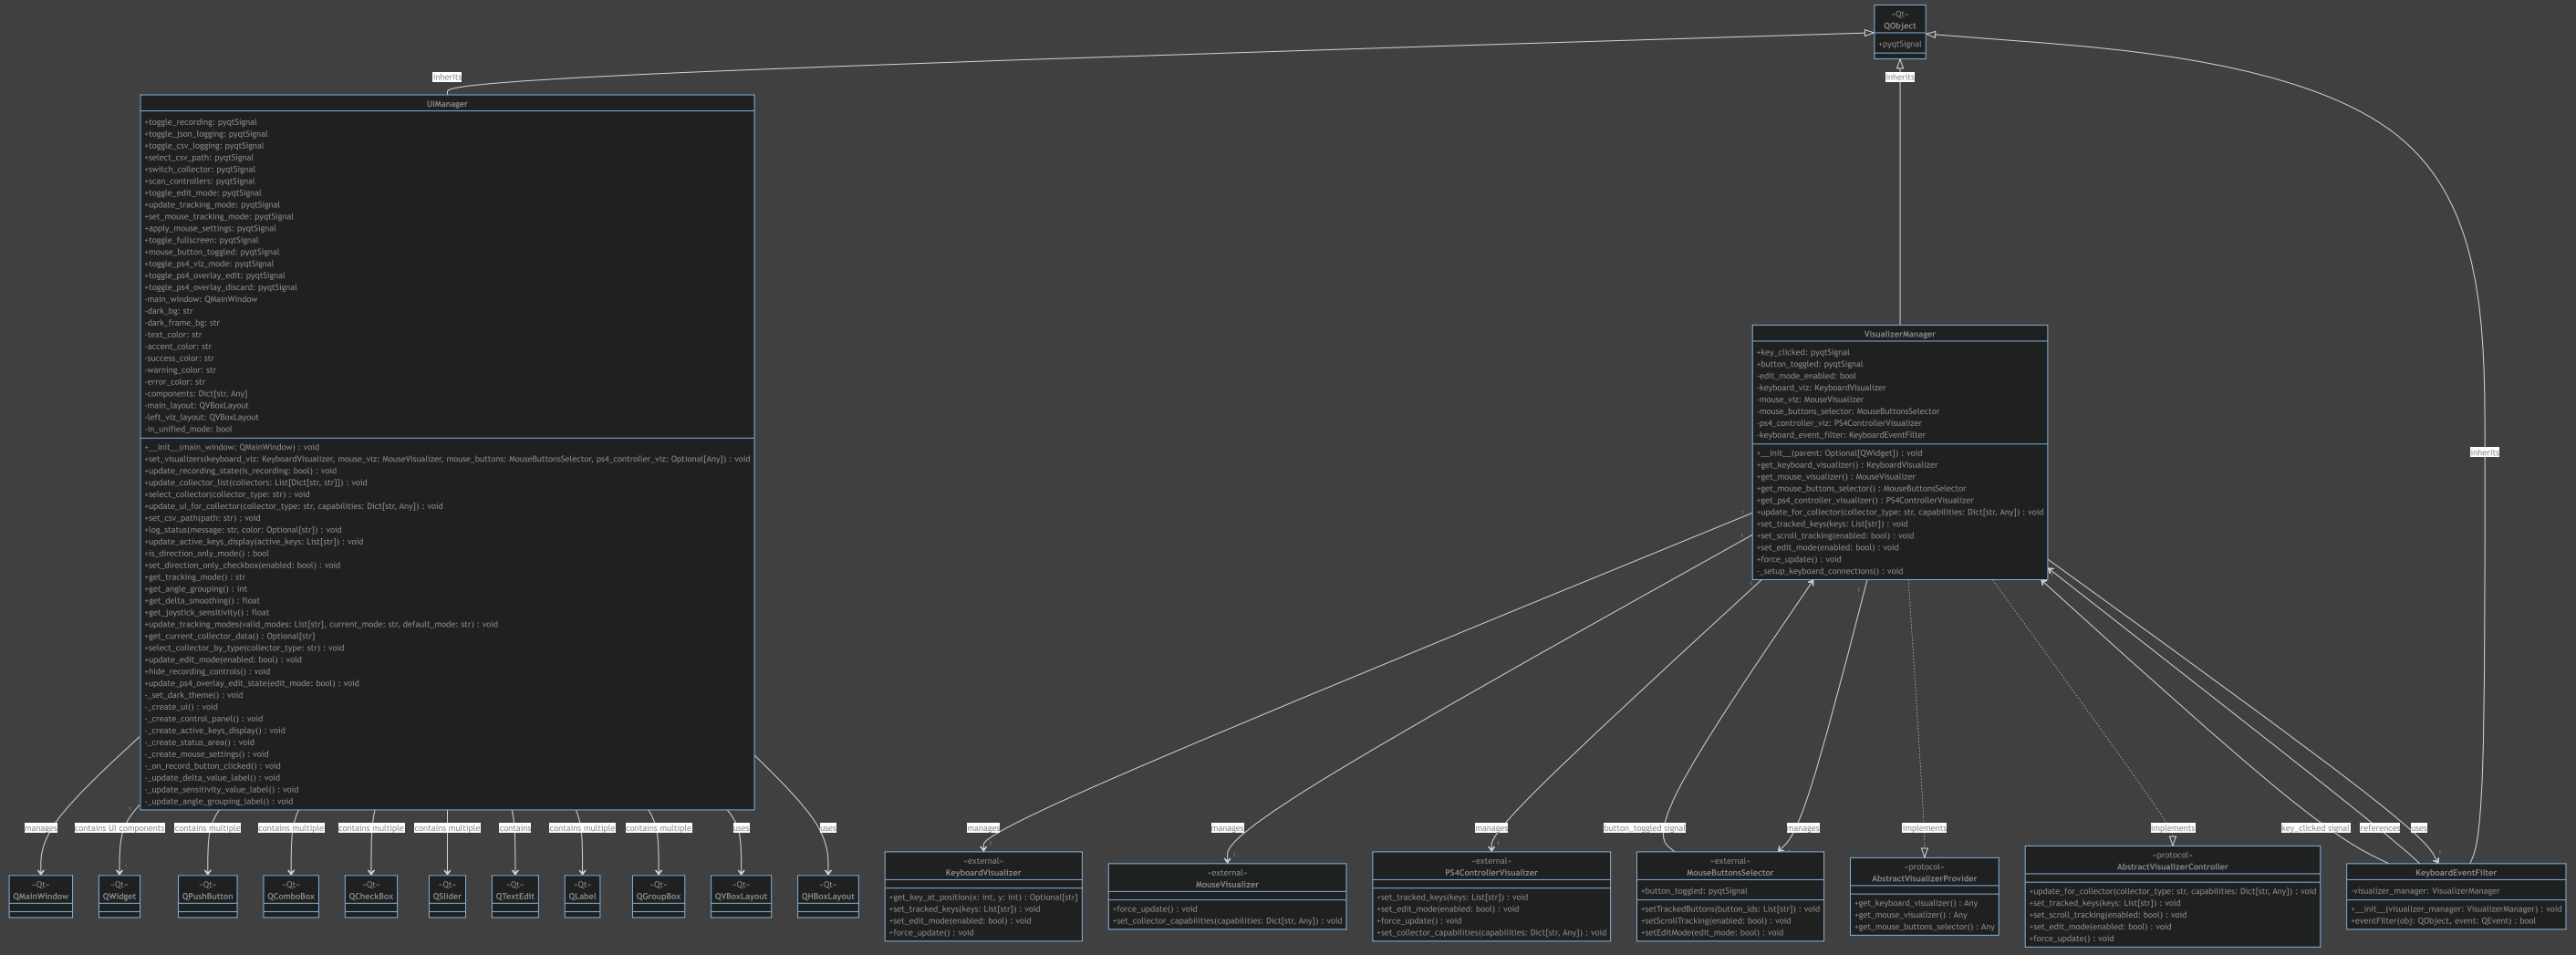
«Qt»
QObject
+pyqtSignal
inherits
inherits
inherits
UIManager
+toggle_recording: pyqtSignal
+toggle_json_logging: pyqtSignal
+toggle_csv_logging: pyqtSignal
+select_csv_path: pyqtSignal
+switch_collector: pyqtSignal
+scan_controllers: pyqtSignal
+toggle_edit_mode: pyqtSignal
+update_tracking_mode: pyqtSignal
+set_mouse_tracking_mode: pyqtSignal
+apply_mouse_settings: pyqtSignal
+toggle_fullscreen: pyqtSignal
+mouse_button_toggled: pyqtSignal
+toggle_ps4_viz_mode: pyqtSignal
+toggle_ps4_overlay_edit: pyqtSignal
+toggle_ps4_overlay_discard: pyqtSignal
-main_window: QMainWindow
-dark_bg: str
-dark_frame_bg: str
-text_color: str
-accent_color: str
-success_color: str
-warning_color: str
-error_color: str
-components: Dict[str, Any]
-main_layout: QVBoxLayout
-left_viz_layout: QVBoxLayout
-in_unified_mode: bool
+__init__(main_window: QMainWindow) : void
+set_visualizers(keyboard_viz: KeyboardVisualizer, mouse_viz: MouseVisualizer, mouse_buttons: MouseButtonsSelector, ps4_controller_viz: Optional[Any]) : void
+update_recording_state(is_recording: bool) : void
+update_collector_list(collectors: List[Dict[str, str]]) : void
+select_collector(collector_type: str) : void
+update_ui_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_csv_path(path: str) : void
+log_status(message: str, color: Optional[str]) : void
+update_active_keys_display(active_keys: List[str]) : void
+is_direction_only_mode() : bool
+set_direction_only_checkbox(enabled: bool) : void
+get_tracking_mode() : str
+get_angle_grouping() : int
+get_delta_smoothing() : float
+get_joystick_sensitivity() : float
+update_tracking_modes(valid_modes: List[str], current_mode: str, default_mode: str) : void
+get_current_collector_data() : Optional[str]
+select_collector_by_type(collector_type: str) : void
+update_edit_mode(enabled: bool) : void
+hide_recording_controls() : void
+update_ps4_overlay_edit_state(edit_mode: bool) : void
-_set_dark_theme() : void
-_create_ui() : void
-_create_control_panel() : void
-_create_active_keys_display() : void
-_create_status_area() : void
-_create_mouse_settings() : void
-_on_record_button_clicked() : void
-_update_delta_value_label() : void
-_update_sensitivity_value_label() : void
-_update_angle_grouping_label() : void
manages
contains UI components
contains multiple
contains multiple
contains multiple
contains multiple
contains
contains multiple
contains multiple
uses
uses
«Qt» QMainWindow
«Qt» QWidget
«Qt» QPushButton
«Qt» QComboBox
«Qt» QCheckBox
«Qt» QSlider
«Qt» QTextEdit
«Qt» QLabel
«Qt» QGroupBox
«Qt» QVBoxLayout
«Qt» QHBoxLayout
VisualizerManager
+key_clicked: pyqtSignal
+button_toggled: pyqtSignal
-edit_mode_enabled: bool
-keyboard_viz: KeyboardVisualizer
-mouse_viz: MouseVisualizer
-mouse_buttons_selector: MouseButtonsSelector
-ps4_controller_viz: PS4ControllerVisualizer
-keyboard_event_filter: KeyboardEventFilter
+__init__(parent: Optional[QWidget]) : void
+get_keyboard_visualizer() : KeyboardVisualizer
+get_mouse_visualizer() : MouseVisualizer
+get_mouse_buttons_selector() : MouseButtonsSelector
+get_ps4_controller_visualizer() : PS4ControllerVisualizer
+update_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_tracked_keys(keys: List[str]) : void
+set_scroll_tracking(enabled: bool) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
-_setup_keyboard_connections() : void
manages
manages
manages
button_toggled signal
manages
implements
implements
key_clicked signal
references
uses
«external» KeyboardVisualizer
+get_key_at_position(x: int, y: int) : Optional[str]
+set_tracked_keys(keys: List[str]) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
«external» MouseVisualizer
+force_update() : void
+set_collector_capabilities(capabilities: Dict[str, Any]) : void
«external» PS4ControllerVisualizer
+set_tracked_keys(keys: List[str]) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
+set_collector_capabilities(capabilities: Dict[str, Any]) : void
«external» MouseButtonsSelector
+button_toggled: pyqtSignal
+setTrackedButtons(button_ids: List[str]) : void
+setScrollTracking(enabled: bool) : void
+setEditMode(edit_mode: bool) : void
«protocol» AbstractVisualizerProvider
+get_keyboard_visualizer() : Any
+get_mouse_visualizer() : Any
+get_mouse_buttons_selector() : Any
«protocol» AbstractVisualizerController
+update_for_collector(collector_type: str, capabilities: Dict[str, Any]) : void
+set_tracked_keys(keys: List[str]) : void
+set_scroll_tracking(enabled: bool) : void
+set_edit_mode(enabled: bool) : void
+force_update() : void
KeyboardEventFilter
-visualizer_manager: VisualizerManager
+__init__(visualizer_manager: VisualizerManager) : void
+eventFilter(obj: QObject, event: QEvent) : bool