


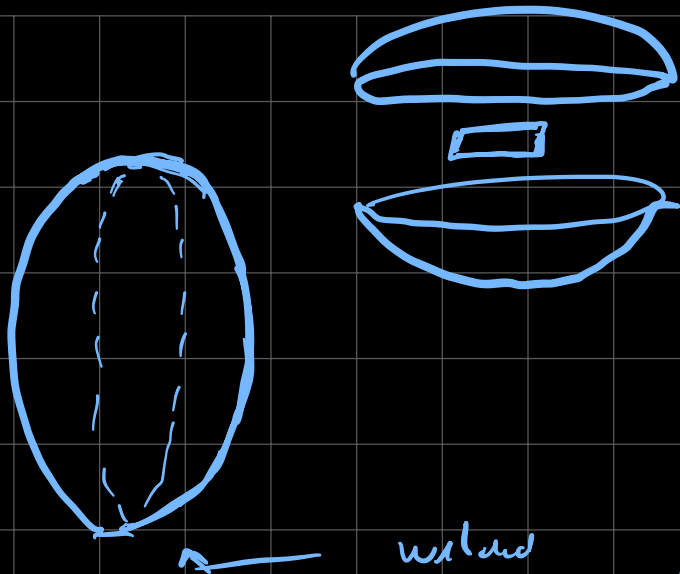
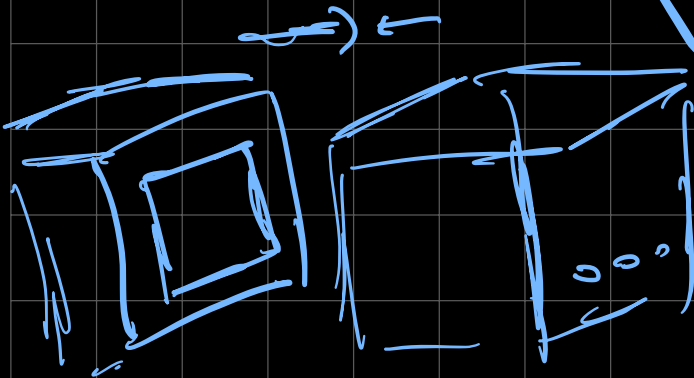




water




Interface

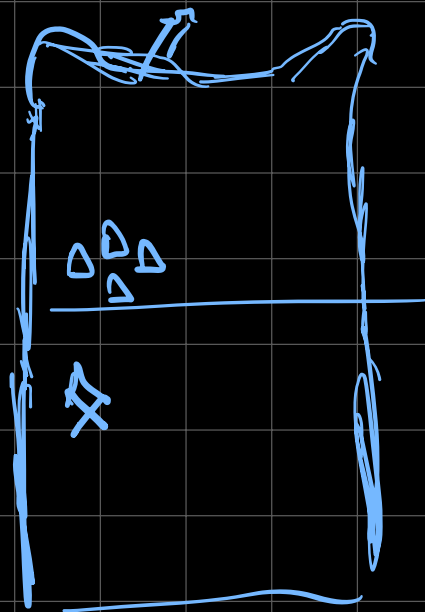




Symbol recognition

- alternative ... $\hat{A} \hat{B} \hat{C} \hat{D}$

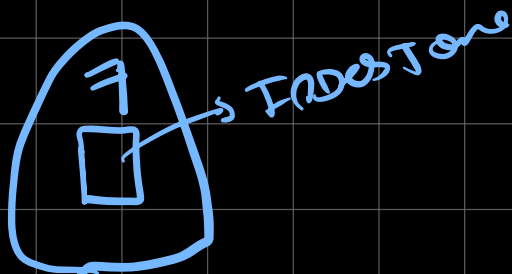

magnetics



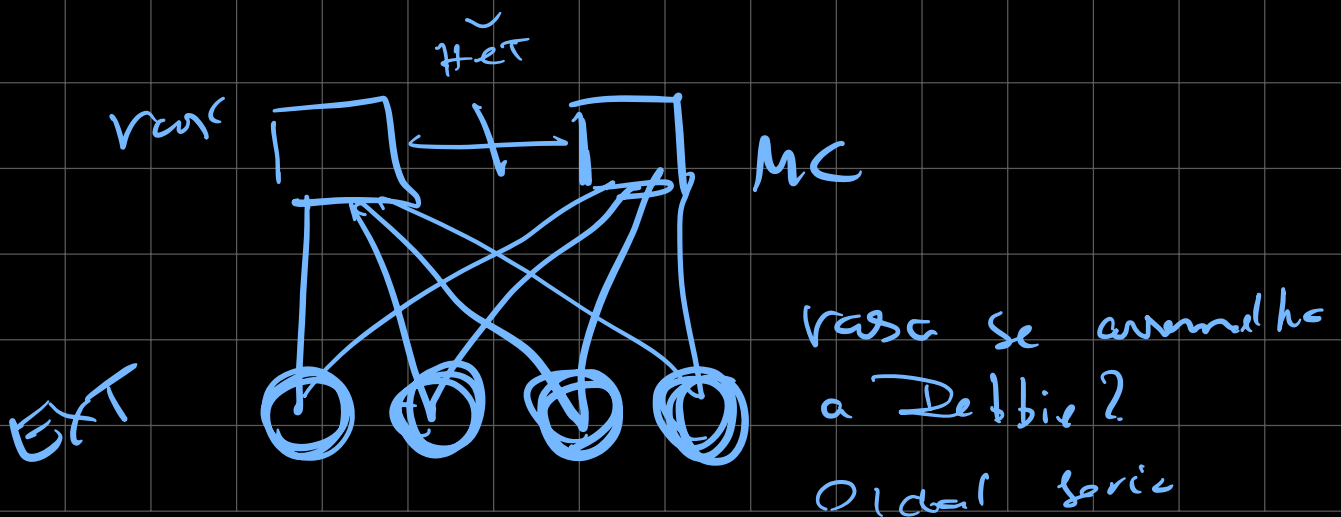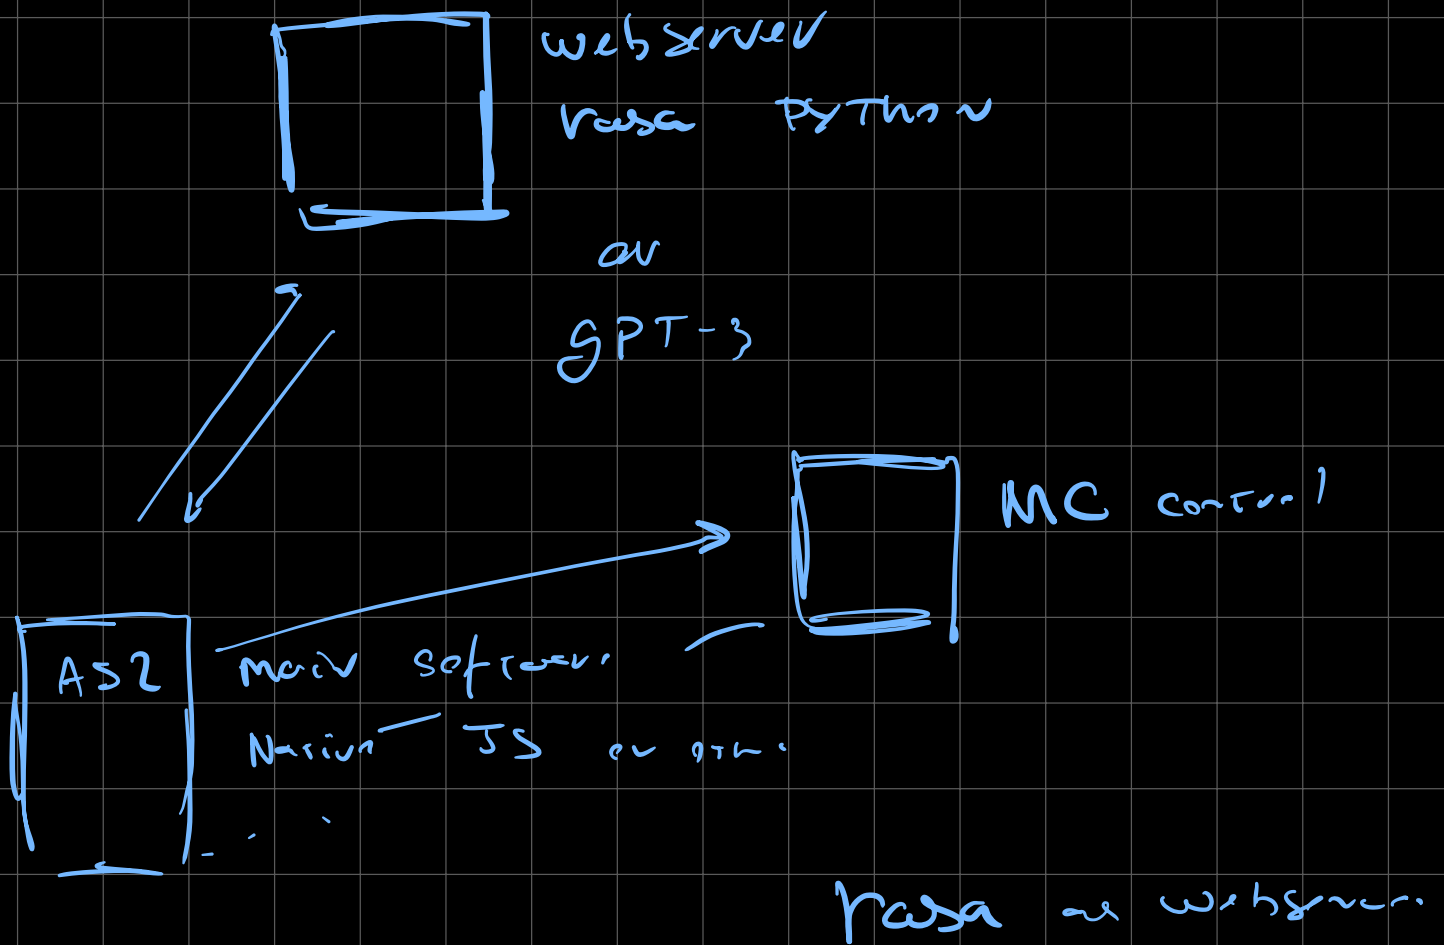


for 0 que serie
a Double 3
com $\frac{GPT}{2}$

serie
possible
under



GPT $\rightarrow$ AWS?

GPT

Initial
Genetic
networks



[Simple Convergence]




process $x + \delta$

$x + n\delta$

not very scalable


reach overflow in

some hundred iterations



It is
a limitation
with the GPT approach


↓ That does NOT occur with some






Merging Rasa + GPT
could be a solution

Pre determined
Intent Calculation

BUT for AWS maybe
two servers are needed

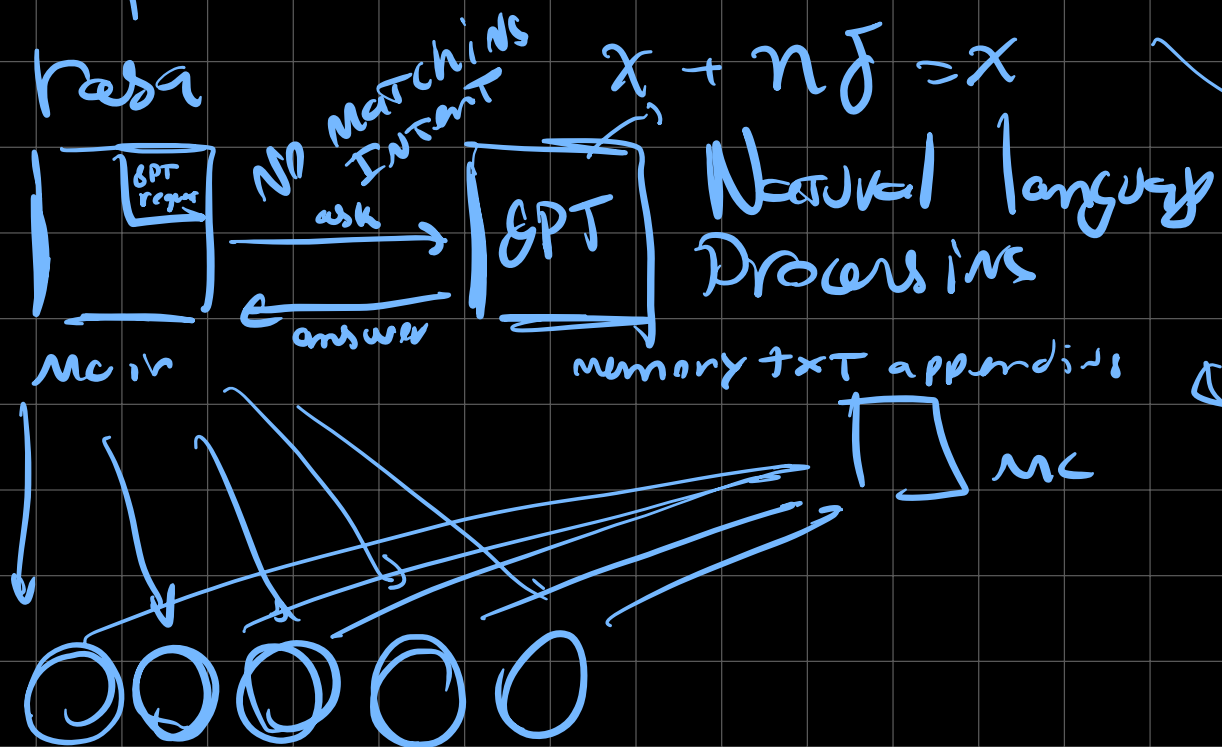

STEP 1 Build rasa - Test on
DS comp try http comms
or maybe websocket
~

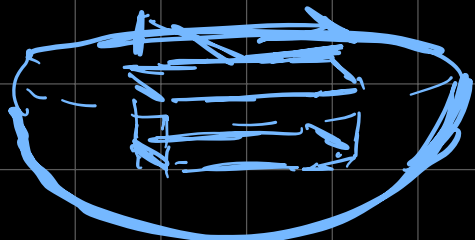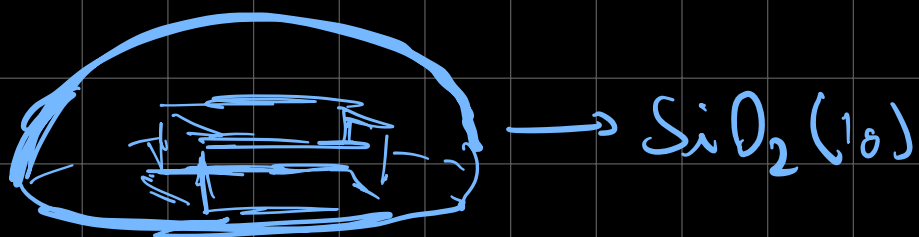

$$-\frac{d[A]}{dt} = k[A]^b \quad \frac{d[A]}{[A]} = -k dt$$

$$\ln[A] \Big|_{[A]_0}^{[A]} = -kt$$

$$[A] = [A_0] e^{-kt}$$

$$k = A e^{-\frac{E_a}{RT}}$$

$$\ln[A] = -A e^{-\frac{E_a}{RT}} t \quad \text{Completely finished}$$

$$-A e^{-\frac{E_a}{RT}} t \downarrow$$


$$[A] \downarrow = [A_0] e \downarrow$$

$$\uparrow \downarrow$$

"Debbie 4.0 Introduction"

reikjavik
89.147.108.252

Port: 3000 NODE.JS AI PROTOCOL

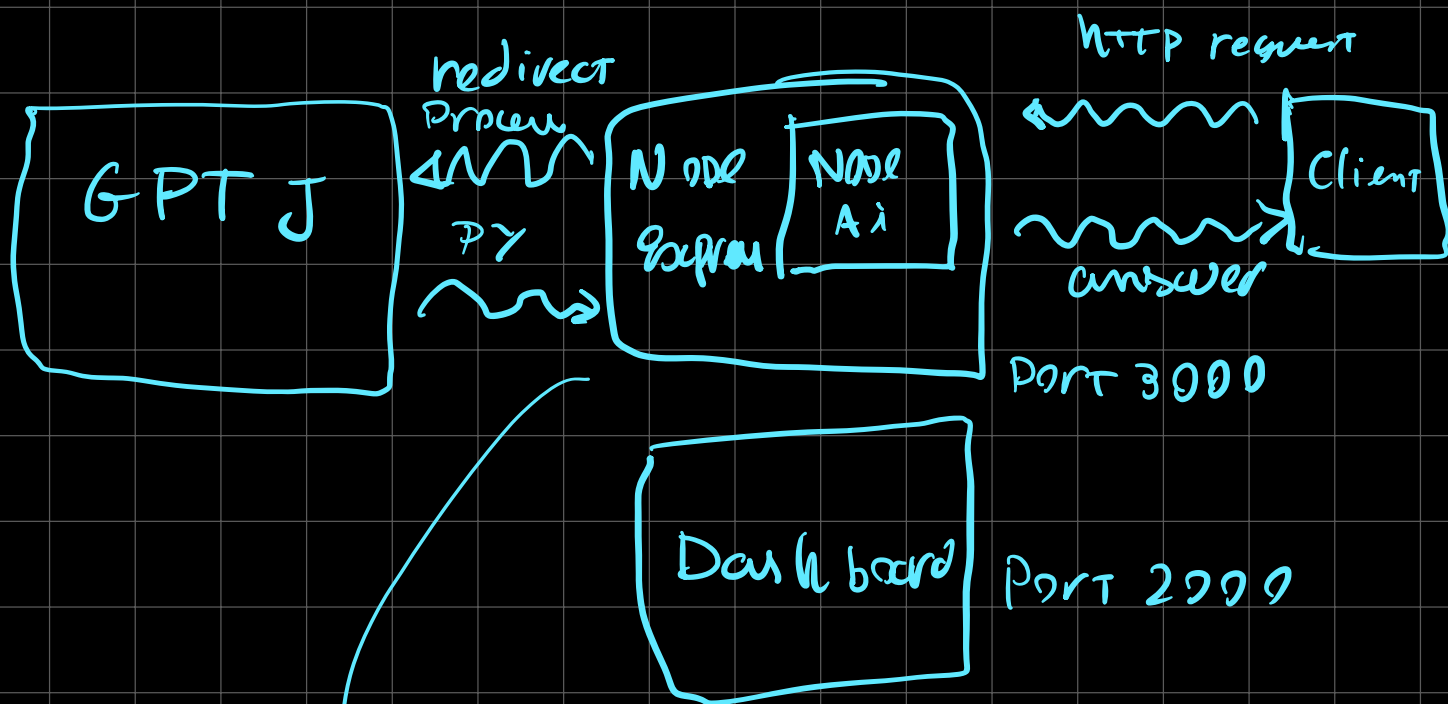

→ Or In Node Brain.js
or self created adjoint
ai.

