


HIGH-TEMPERATURE GLASS CLOTH TAPE
WOVEN GLASS FABRIC / SILICONE ADHESIVE

PRODUCT CODE
DT3131

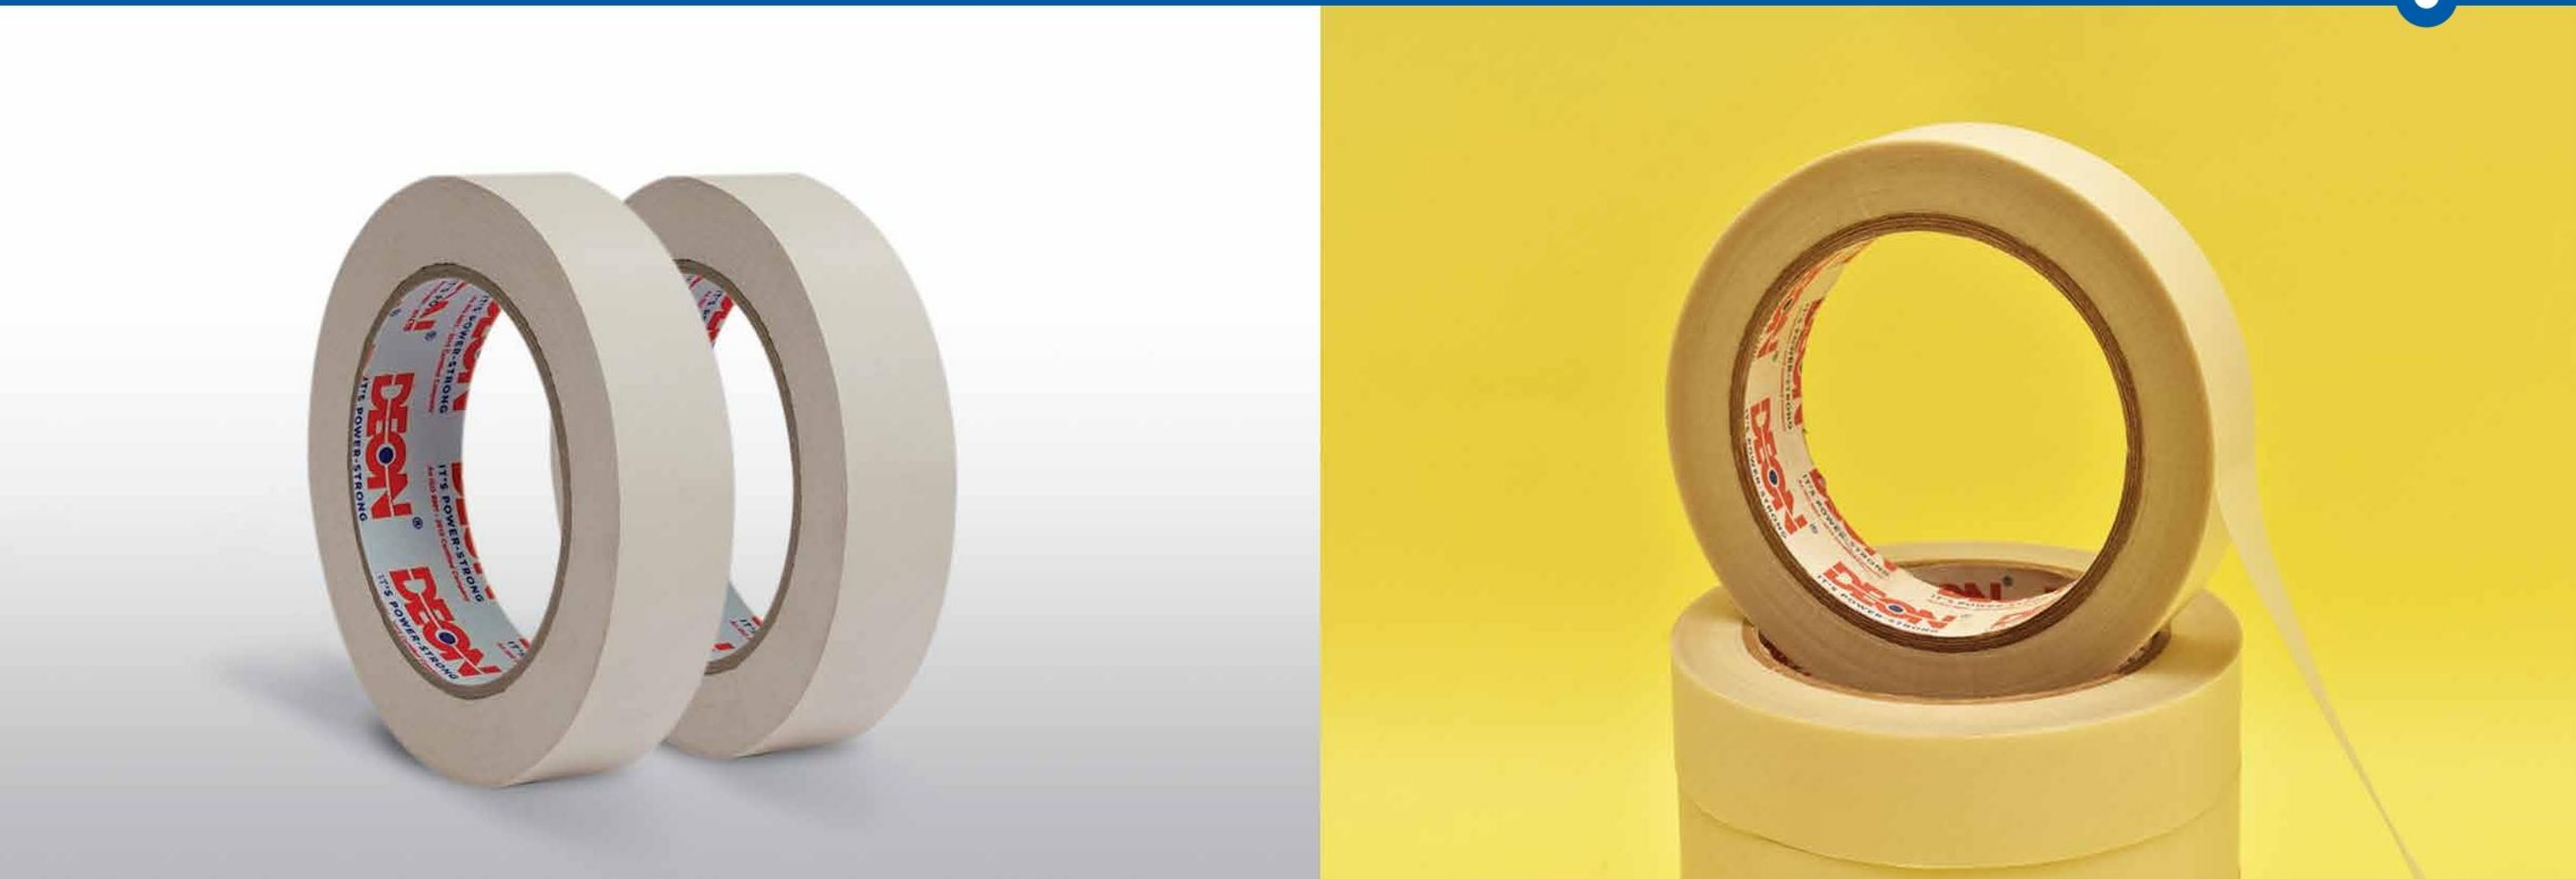

Description

DEON® DT3131 – HIGH-TEMPERATURE GLASS CLOTH TAPE
Woven glass fabric tape with thermosetting polysiloxane adhesive, designed for high-temperature insulation and mechanical protection in demanding industrial and electrical applications.

- Features
- Wide Temperature Range (-40°C to 300°C)
 - Excellent Abrasion Resistance for Mechanical Protection
 - Flame Resistant

- High Tensile Strength (≈ 150 N/cm)

- Application
- Heat Tracing Cable Mounting & Fixation
 - Wire Harnessing in High-Temperature Environments

- High-Temperature Duct Insulation
 - Electrical Component Fixing & Bundling

Technical Properties	Product Characteristics	UOM	Typical Values	Test Method
	Backing Material	-	Woven Glass Fabric	-
	Thickness (Customizable)	µm	180 ± 5	ASTM D1000
	Width (Customizable)	mm	25	ASTM D1000
	Length (Customizable)	m	20/30	-
	Adhesive	-	Thermosetting Polysiloxane	-
	Adhesive Coating	-	Single - sided	-
	Adhesion to Steel (min)	N/cm	2.5	ASTM D1000
	Tensile Strength (min)	N/cm	150	ASTM D1000
	Temperature Operating Range	-	-40°C to +300°C	ASTM D1000
	Elongation at Break	%	5	ASTM D1000
	Breakdown Voltage (min)	V	2000	ASTM D1000
	Flammability Rating	-	Self Extinguishing	ASTM D1000

Available Colours

Off-white

Storage & Usage Conditions

Store at room temperature, away from direct sunlight, heat, and moisture.
Shelf life is six months from the date of shipment when stored under standard conditions (21°C, 50% RH).
Ensure the application surface is clean, dry, and free from grease and oil. A trial application is recommended to confirm suitability for the intended use.

Available Formats

Standard cut rolls and jumbo roll formats for slitting and conversion

