






prometheus_http_requests_total{handler =~ "/a.*"} Execute Explain ☐ Graph Evaluation time Load time: 23ms Result series: 33 prometheus_http_requests_total{code="200", handler="/alertmanager-discovery", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/alerts", instance="localhost:9090", job="prometheus-localhost"} 0 prometheus_http_requests_total{code="200", handler="/api/v1/*path", instance="localhost:9090", job="prometheus-0 localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/admin/tsdb/clean_tombstones", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/admin/tsdb/delete_series", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/admin/tsdb/snapshot", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/alertmanagers", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/alerts", instance="localhost:9090", job="prometheus-0 localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/format_query", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/label/:name/values", instance="localhost:9090", 4 job="prometheus-localhost"} prometheus http requests total{code="200", handler="/api/v1/labels", instance="localhost:9090", job="prometheus-0 localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/metadata", instance="localhost:9090", job="prometheus-4 localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/notifications", instance="localhost:9090", 0 job="prometheus-localhost"} prometheus_http_requests_total{code="200", handler="/api/v1/notifications/live", instance="localhost:9090", 4 job="prometheus-localhost"}






prometheus_http_requests_total{code="200", handler="/api/v1/parse_query", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/query", instance="localhost:9090", job="prometheus-localhost"}	19
$prometheus_http_requests_total\{code="200", handler="/api/v1/query_exemplars", instance="localhost:9090", job="prometheus-localhost"\}$	0
prometheus_http_requests_total{code="200", handler="/api/v1/query_range", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/read", instance="localhost:9090", job="prometheus-localhost"}	0
$prometheus_http_requests_total\{ \textbf{code} = "200", \textbf{handler} = "/api/v1/rules", \textbf{instance} = "localhost:9090", \textbf{job} = "prometheus-localhost"\}$	0
prometheus_http_requests_total{code="200", handler="/api/v1/scrape_pools", instance="localhost:9090", job="prometheus-localhost"}	3
prometheus_http_requests_total{code="200", handler="/api/v1/series", instance="localhost:9090", job="prometheus-localhost"}	11
prometheus_http_requests_total{code="200", handler="/api/v1/status/buildinfo", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/status/config", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/status/flags", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/status/runtimeinfo", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/status/tsdb", instance="localhost:9090", job="prometlocalhost"}	heus- 0
prometheus_http_requests_total{code="200", handler="/api/v1/status/walreplay", instance="localhost:9090", job="prometheus-localhost"}	0
prometheus_http_requests_total{code="200", handler="/api/v1/targets", instance="localhost:9090", job="prometheu localhost"}	s- 3
$prometheus_http_requests_total\{ \textbf{code} = "200", \textbf{handler} = "/api/v1/targets/metadata", \textbf{instance} = "localhost: 9090", \textbf{job} = "prometheus-localhost"\}$	0
prometheus_http_requests_total{code="200", handler="/api/v1/write", instance="localhost:9090", job="prometheus-localhost"}	0

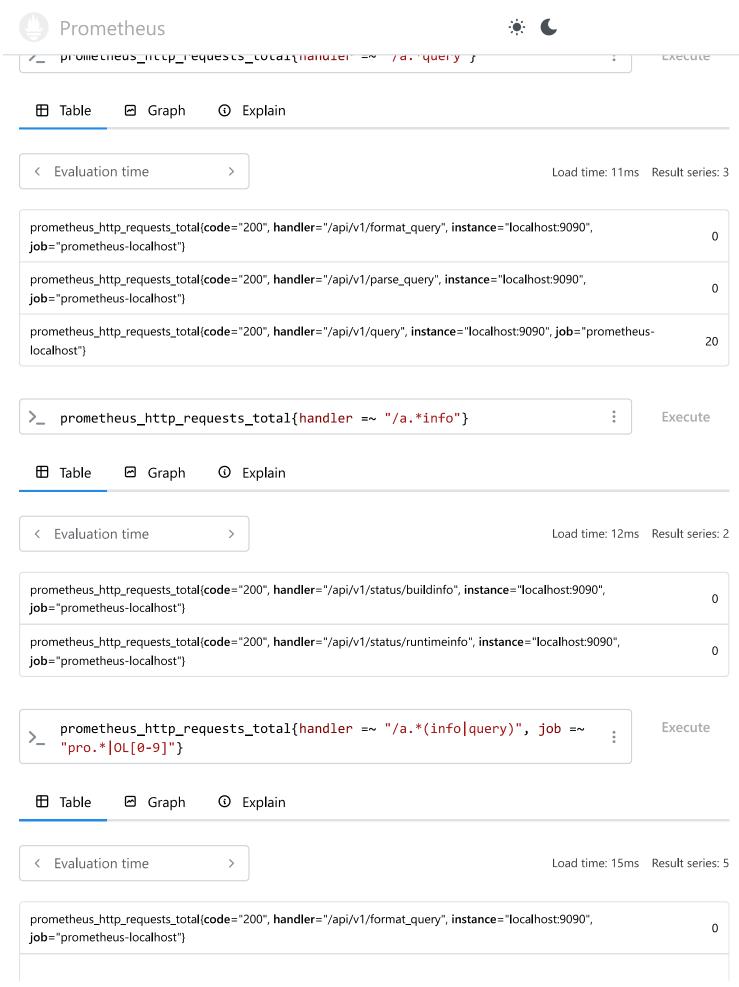





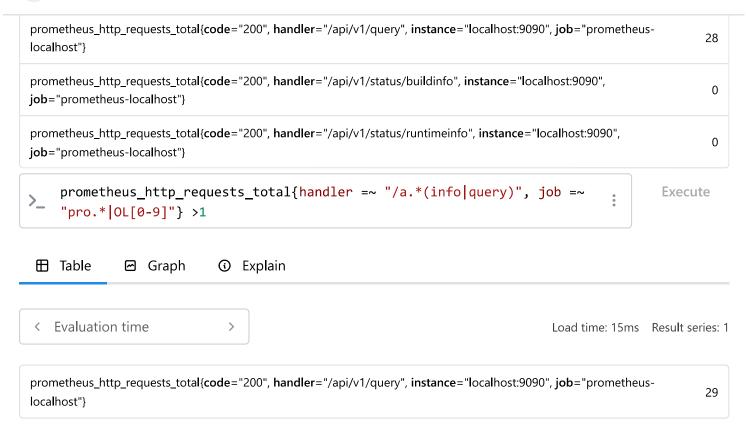

+ Add query