


## Lab Exercise 3 - Write a C program or shell script to send a simple mail to any host without using any professional mailer like gmail.


### bash script:

- Setup ssmtp server and configure using root privileges ( [Ref1](#), [Ref2](#) ).
- chmod +x ./lab3.sh ( enable execution privilege )
- ./lab3.sh

```
#!/bin/bash  
  
ssmtp ced18i039@iiitdm.ac.in < testmail.txt
```

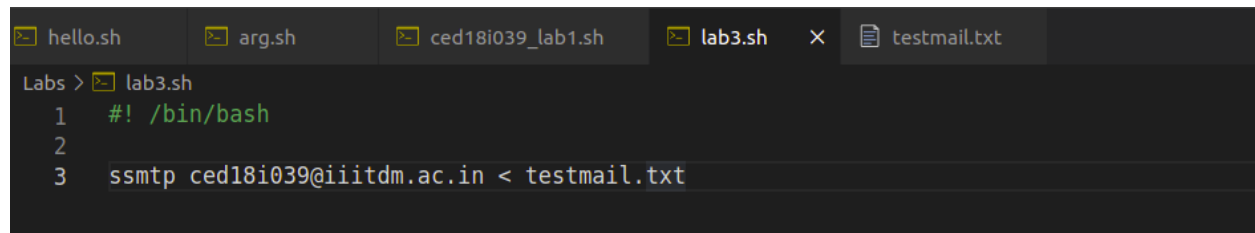

A terminal window with tabs for 'hello.sh', 'arg.sh', 'ced18i039\_lab1.sh', 'lab3.sh', and 'testmail.txt'. The 'lab3.sh' tab is active, showing the script content: '1 #!/bin/bash', '2', and '3 ssmtp ced18i039@iiitdm.ac.in < testmail.txt'.

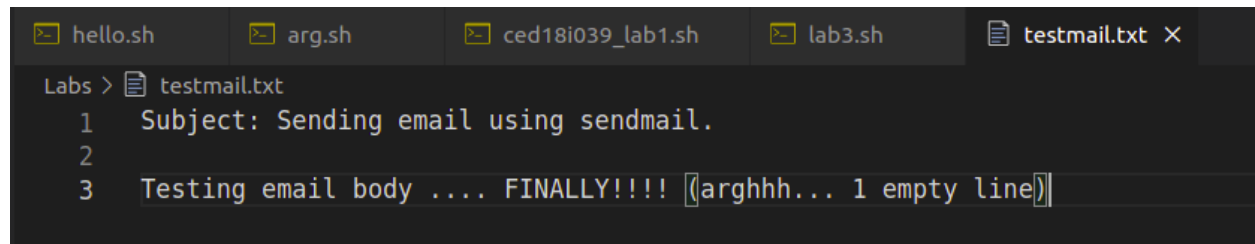

A terminal window with tabs for 'hello.sh', 'arg.sh', 'ced18i039\_lab1.sh', 'lab3.sh', and 'testmail.txt'. The 'testmail.txt' tab is active, showing the email content: '1 Subject: Sending email using sendmail.', '2', and '3 Testing email body .... FINALLY!!!! (arghhh... 1 empty line)'.

Output: (Yay!!)

