


AI ROAST GENERATOR

#Bug in code -not showing apostrophe “ “ “

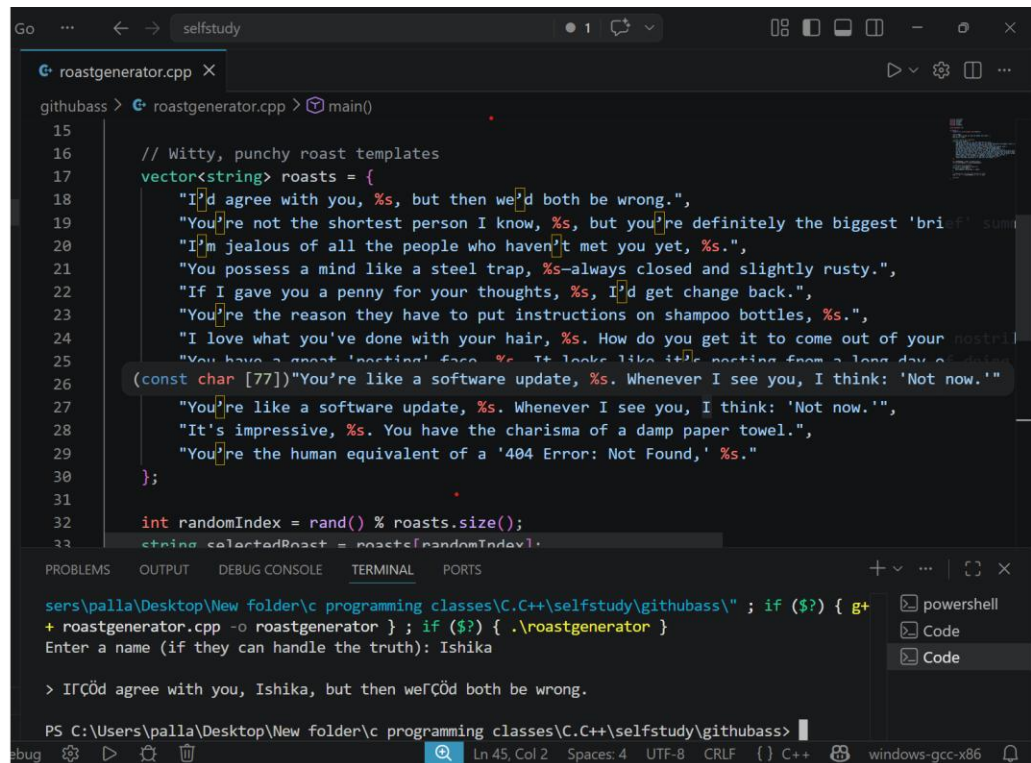


```
15 // Witty, punchy roast templates
16
17 vector<string> roasts = {
18     "I'd agree with you, %s, but then we'd both be wrong.",
19     "You're not the shortest person I know, %s, but you're definitely the biggest 'bri f' sum",
20     "I'm jealous of all the people who haven't met you yet, %s.",
21     "You possess a mind like a steel trap, %s--always closed and slightly rusty.",
22     "If I gave you a penny for your thoughts, %s, I'd get change back.",
23     "You're the reason they have to put instructions on shampoo bottles, %s.",
24     "I love what you've done with your hair, %s. How do you get it to come out of your nostril",
25     "You have a great 'reacting' face. %s. It looks like it's reacting from a long day of",
26     (const char [77])"You're like a software update, %s. Whenever I see you, I think: 'Not now.'"
27     "You're like a software update, %s. Whenever I see you, I think: 'Not now.'",
28     "It's impressive, %s. You have the charisma of a damp paper towel.",
29     "You're the human equivalent of a '404 Error: Not Found,' %s."
30 };
31
32 int randomIndex = rand() % roasts.size();
33 string selectedRoast = roasts[randomIndex];
```

Terminal Output:

```
PS C:\Users\palla\Desktop\New folder\c programming classes\C.C++\selfstudy\githubass> g++ roastgenerator.cpp -o roastgenerator & if ($?) { .\roastgenerator }
Enter a name (if they can handle the truth): Ishika
> IÇÖd agree with you, Ishika, but then weIÇÖd both be wrong.
```

Prompt->

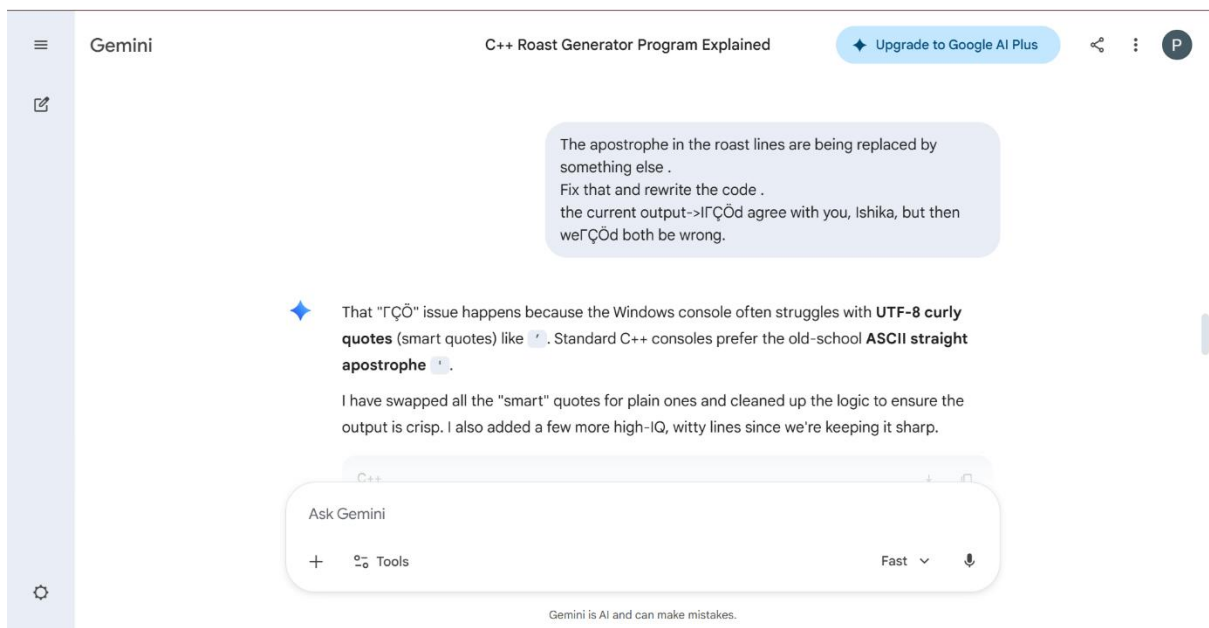

Gemini

C++ Roast Generator Program Explained

Upgrade to Google AI Plus

The apostrophe in the roast lines are being replaced by something else .
Fix that and rewrite the code .
the current output->IÇÖd agree with you, Ishika, but then weIÇÖd both be wrong.

That "IÇÖ" issue happens because the Windows console often struggles with **UTF-8 curly quotes** (smart quotes) like " ". Standard C++ consoles prefer the old-school **ASCII straight apostrophe** ' ' .

I have swapped all the "smart" quotes for plain ones and cleaned up the logic to ensure the output is crisp. I also added a few more high-IQ, witty lines since we're keeping it sharp.

```
C++
vector<string> roasts = {
    "I'd agree with you, %s, but then we'd both be wrong.",
    "You're not the shortest person I know, %s, but you're definitely the biggest 'bri f' sum",
    "I'm jealous of all the people who haven't met you yet, %s.",
    "You possess a mind like a steel trap, %s--always closed and slightly rusty.",
    "If I gave you a penny for your thoughts, %s, I'd get change back.",
    "You're the reason they have to put instructions on shampoo bottles, %s.",
    "I love what you've done with your hair, %s. How do you get it to come out of your nostril",
    "You have a great 'reacting' face. %s. It looks like it's reacting from a long day of",
    "You're like a software update, %s. Whenever I see you, I think: 'Not now.'"
    "You're like a software update, %s. Whenever I see you, I think: 'Not now.'",
    "It's impressive, %s. You have the charisma of a damp paper towel.",
    "You're the human equivalent of a '404 Error: Not Found,' %s."
};

int randomIndex = rand() % roasts.size();
string selectedRoast = roasts[randomIndex];
```

Ask Gemini

Tools

Fast

Gemini is AI and can make mistakes.

Correct output->

The image shows a Visual Studio Code editor window with a C++ file named `roastgenerator.cpp`. The code is as follows:

```
1 #include <iostream>
2 #include <string>
3 #include <vector>
4 #include <ctime>
5 #include <cstdlib>
6
7 using namespace std;
8
9 int main() {
10     // Seed the random number generator
11     srand(static_cast<unsigned int>(time(0)));
12
13     string name;
14     // Updated prompt text
15     cout << "Enter Name (at your own risk): ";
16     getline(cin, name);
17
18     // Witty roast templates using standard ASCII to avoid encoding issues
19     vector<string> roasts = {
```

The terminal window at the bottom shows the command to compile and run the program:

```
ldev\c programming classes\C.C++\selfstudy\githubass> ; if ($?) { g++ roastgenerator.cpp -o roastgenerator } ; if ($?) { .\roastgenerator }
```

The user input is `RIYA`, and the program output is:

```
I'd love to insult you, RIYA, but I'm afraid I wouldn't do as good a job as nature already did.
```

The terminal prompt is `PS C:\Users\palla\Desktop\New folder\c programming classes\C.C++\selfstudy\githubass>`.

Prompts to improve the code output->

1. Code generation question



generate a console based program in C++ beginner friendly ,
for generating roasts the program will take users name and
will give a roast line for that name .
every time there will be new roast .
create atleast 8 -10 roast templates for the same .

◆ Building a roast generator is a classic way to practice string handling and random number generation in C++. To make sure you get a different roast every time, we use the `rand()` function seeded with the current time.

Here is a beginner-friendly version using an array of strings to store the templates.

```
C++  
  
#include <iostream>
```

Ask Gemini

+ 🛠️ Tools

Fast ▾ 🗣️

Gemini is AI and can make mistakes.

2.improving roast messages

Gemini

C++ Roast Generator Program Explained

Upgrade to Google AI Plus

P

improve the roast lines ,make them witty

◆

To make a roast witty, you need a mix of "backhanded compliments" and sharp metaphors. I've swapped out the generic "trash" jokes for lines that have a bit more punch and cleverness.

I've also kept the code clean and removed any "robotic" output to keep the vibe sharp.

C++

```
#include <iostream>
#include <string>
#include <vector>
#include <ctime>
#include <cstdlib>
```

Download Copy

Ask Gemini

+ Tools

Fast

Gemini is AI and can make mistakes.

3.debugging

Gemini

C++ Roast Generator Program Explained

Upgrade to Google AI Plus

P

The apostrophe in the roast lines are being replaced by something else .
Fix that and rewrite the code .
the current output->IfÇÖd agree with you, Ishika, but then wefÇÖd both be wrong.

◆

That "IfÇÖ" issue happens because the Windows console often struggles with **UTF-8 curly quotes** (smart quotes) like ". Standard C++ consoles prefer the old-school **ASCII straight apostrophe** ' .

I have swapped all the "smart" quotes for plain ones and cleaned up the logic to ensure the output is crisp. I also added a few more high-IQ, witty lines since we're keeping it sharp.

C++

Download Copy

Ask Gemini

+ Tools

Fast

Gemini is AI and can make mistakes.

do not print "result" as it destroys the vibe of the roast

◆ Got it—printing "RESULT" is definitely too formal for a roast. It kills the momentum.

I've updated the code to remove that header and added a small delay using `system("pause")` (for Windows) or a simple `cin.get()` so the window doesn't close immediately after the roast drops. I also added a few more "spicy" templates.

C++

```
#include <iostream>
#include <string>
#include <vector>
#include <ctime>
#include <cstdlib>
```

Ask Gemini

+ Tools

Fast



Gemini is AI and can make mistakes.