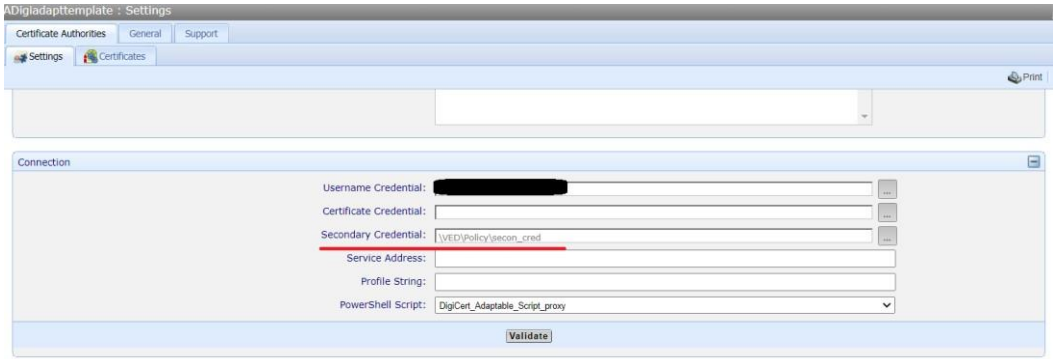
Glossary

Parameters	Description	Default values used in the script	Allowed values
product	A CertCentral product API name	"ssl_securesite_flex"	# <String> Product scripts are provided
disable_renewal_notifications	Specify if renewal notification emails should be disabled.	**$true**	# <Boolean> $true or $false
locale	Language that the DCV email should use.	**"en"**	# <String> Refer to https://dev.digicert.com/glossary/#locale-codes to see supported locale codes.
dcv_method	DCV method to use when verifying domain control.	**"email"**	# <String> Refer to https://dev.digicert.com/glossary/#dcv-methods to see available Domain Control Validation (DCV) methods.
ca_cert_id	ID of the public intermediate certificate authority (ICA) that you want to sign the certificate.		# <String> To get IDs for the public ICAs that can sign each type of certificate, use the Product limits(https://dev.digicert.com/services-api/containers/product-limits) endpoint OR Product Info endpoint: https://dev.digicert.com/services-api/products/product-info/#>
server_platform	Server platform ID.	**Default: -1 (other)**	# <Integer> Refer to https://dev.digicert.com/glossary/#server-platforms to see available server platform IDs.

Parameters	Description	Default values used in the script	Allowed values
cert_validity	Defines the validity period of the first certificate issued for this order. Cannot exceed order validity period. This object is not used for requests		# <Object> The cert_validity parameter can take any one of the following values **cert_validity.years :** Number of years the certificate is valid after it is issued. Can be replaced with cert_validity.days or cert_validity.custom_expiration_date. Allowed value: 1
	from accounts that do not have Multi-year Plans enabled. The validity period of the order or the maximum certificate validity period defined by CA/B Forum baseline requirements, whichever is shorter.		**cert_validity.days :** Number of days the certificate is valid after it is issued. Overrides cert_validity.years. Max: 397 **cert_validity.custom_expiration_date :** A custom expiration date for the certificate. Overrides cert_validity.days and cert_validity.years. Format: dd MMM YYYY (for example, "09 JUN 2021") Range: Must be within 397 days of the date you request the certificate.

Parameters	Description	Default values used in the script	Allowed values
order_validity	Defines the validity period of the order. Order validity determines the length of a Multi-year Plan. Requests must include a value for either the order_validity object or for one of the top-level order validity parameters (validity_years, validity_days, or custom_expiration_date). The values you provide in the order_validity object override the top-level validity parameters.	**order_validity.years** : 1	# <Object> The order_validity parameter can accept any one of the following values: **order_validity.years** : Number of years the order is valid. Can be replaced by order_validity.days or order_validity.custom_expiration_date Range: 1-6 **order_validity.days :** Number of days the order is valid. Overrides order_validity.years. Max: 2190 **order_validity.custom_expiration_date :** Custom expiration date for the order. Overrides order_validity.days and order_validity.years. Format: dd MMM YYYY (for example, "09 JUN 2025") Range: Must be within six years of the date you request the order.
comments	Comments about the order for the approver.		# <String>
apply_cr_discount	When **true**, applies any competitive replacement discounts that are available for the domains on the order.	**false**	# <Boolean> $true or $false To calculate competitive replacement discounts before you place an order, use the List replacement benefits endpoint. (https://dev.digicert.com/services-api/finance/list-competitive-replacement-benefits/


Parameters	Description	Default values used in the script	Allowed values
serial_number	Serial number of the non-DigiCert certificate for which you expect to receive a competitive replacement discount when you place the order. If not provided, we use the information from your order request to look for a match among certificates on the CT log servers, and apply a discount based on the best match we can find.		# <String>
auto_renew	Specify whether the certificate should automatically renew.	Default: 0	# <Integer> Allowed values: 0 (disabled), 1 (enabled)
custom_renewal_ message	Custom message to be included in renewal notifications.		# <String>
additional_emails	Additional email addresses to receive certificate notification emails (e.g., certificate issuance, duplicate certificate, certificate renewals, etc.).		# array of <String> Additional email addresses to receive certificate notification emails. Values can be configured as follows: **additional_emails** : [“dev1@digicert.com”, “dev2@digicert.com”]
payment_method	Specify the payment method to use.	**balance**	# <String> Allowed values: balance, card, profile.

Parameters	Description	Default values used in the script	Allowed values
container	If needed, specify the container the order should be placed under. In the CertCentral UI, containers are called divisions.		# <Object> Container ID Can be obtained from **List Containers endpoint** https://dev.digicert.com/services-api/containers/list-containers/
use_default_ica flag	If this flag is **true**, the default ICA configured in the account will be considered during initial enrollment and renewal. If use_default_ica flag is **false** and ca_cert_id is not blank, then the value of ca_cert_id would be considered the ICA for signing the certificate.	**false**	#<Boolean> $true or $false
proxy_url	Configure proxy IP and port for this parameter in the script and pass credentials as secondary credentials from TPP. The script will pick up those secondary credentials and use them for the proxy.		Sample proxy URL configuration **$global:proxy_url** = "http://proxy:port"  Sample screenshot of TPP where secondary credentials should be configured for a template


Parameters	Description	Default values used in the script	Allowed values
server_licenses	The number of server licenses you need for the certificate. Only include the server_licenses parameter in the request if units is the payment method and server licenses are enabled.	1	# <Integer>

TPP Custom Fields Configuration


User can add the **DigiCert_Adaptable_Script.ps1** script in their Adaptable CA template to call CC APIs through the script. Before using this template, the user must configure the following custom fields in TPP:

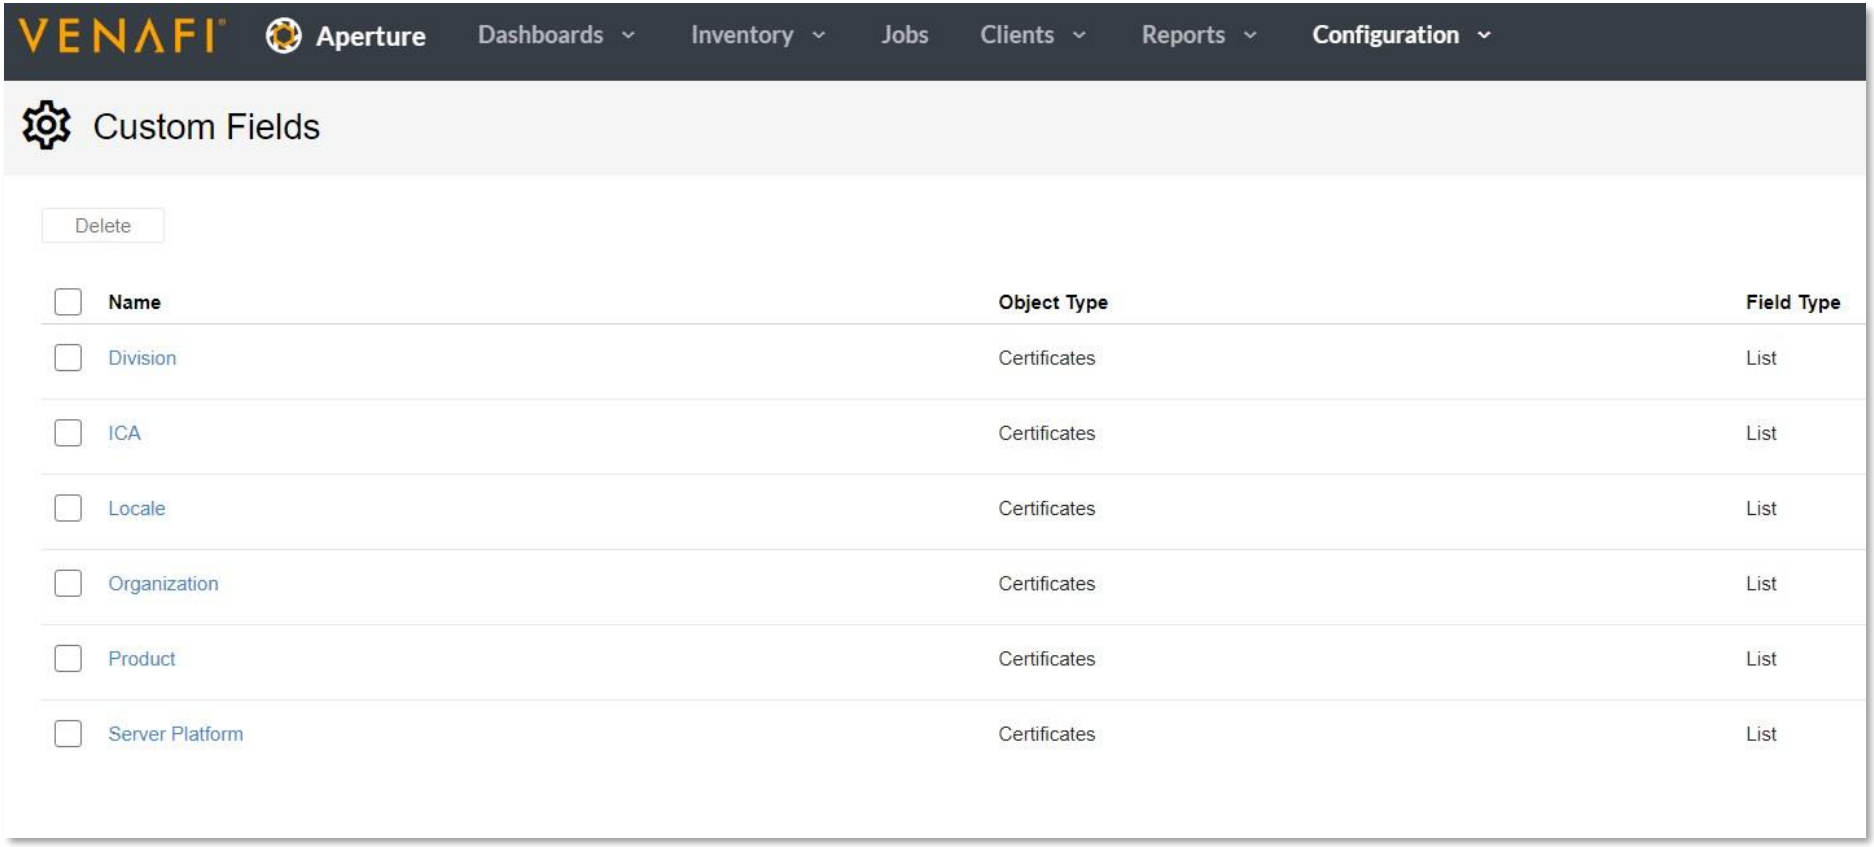


Sample configuration for Product custom field

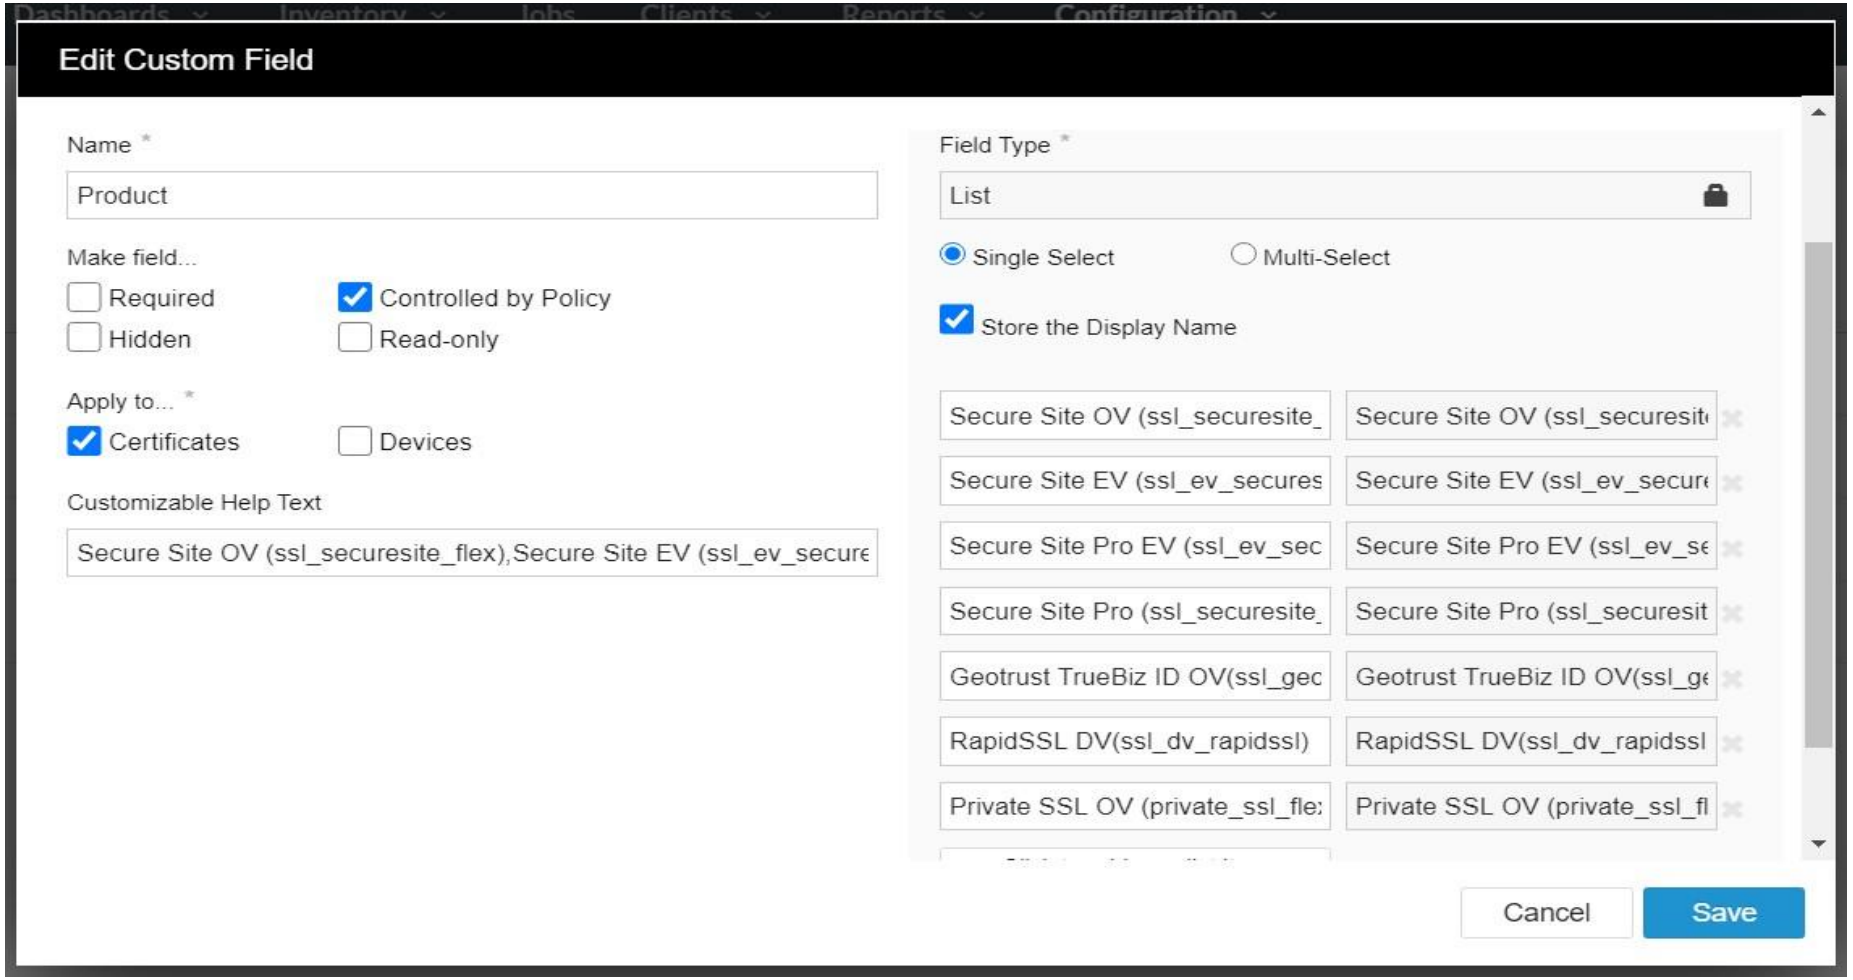


Sample configuration for ICA custom field with 'Store the display name' unchecked

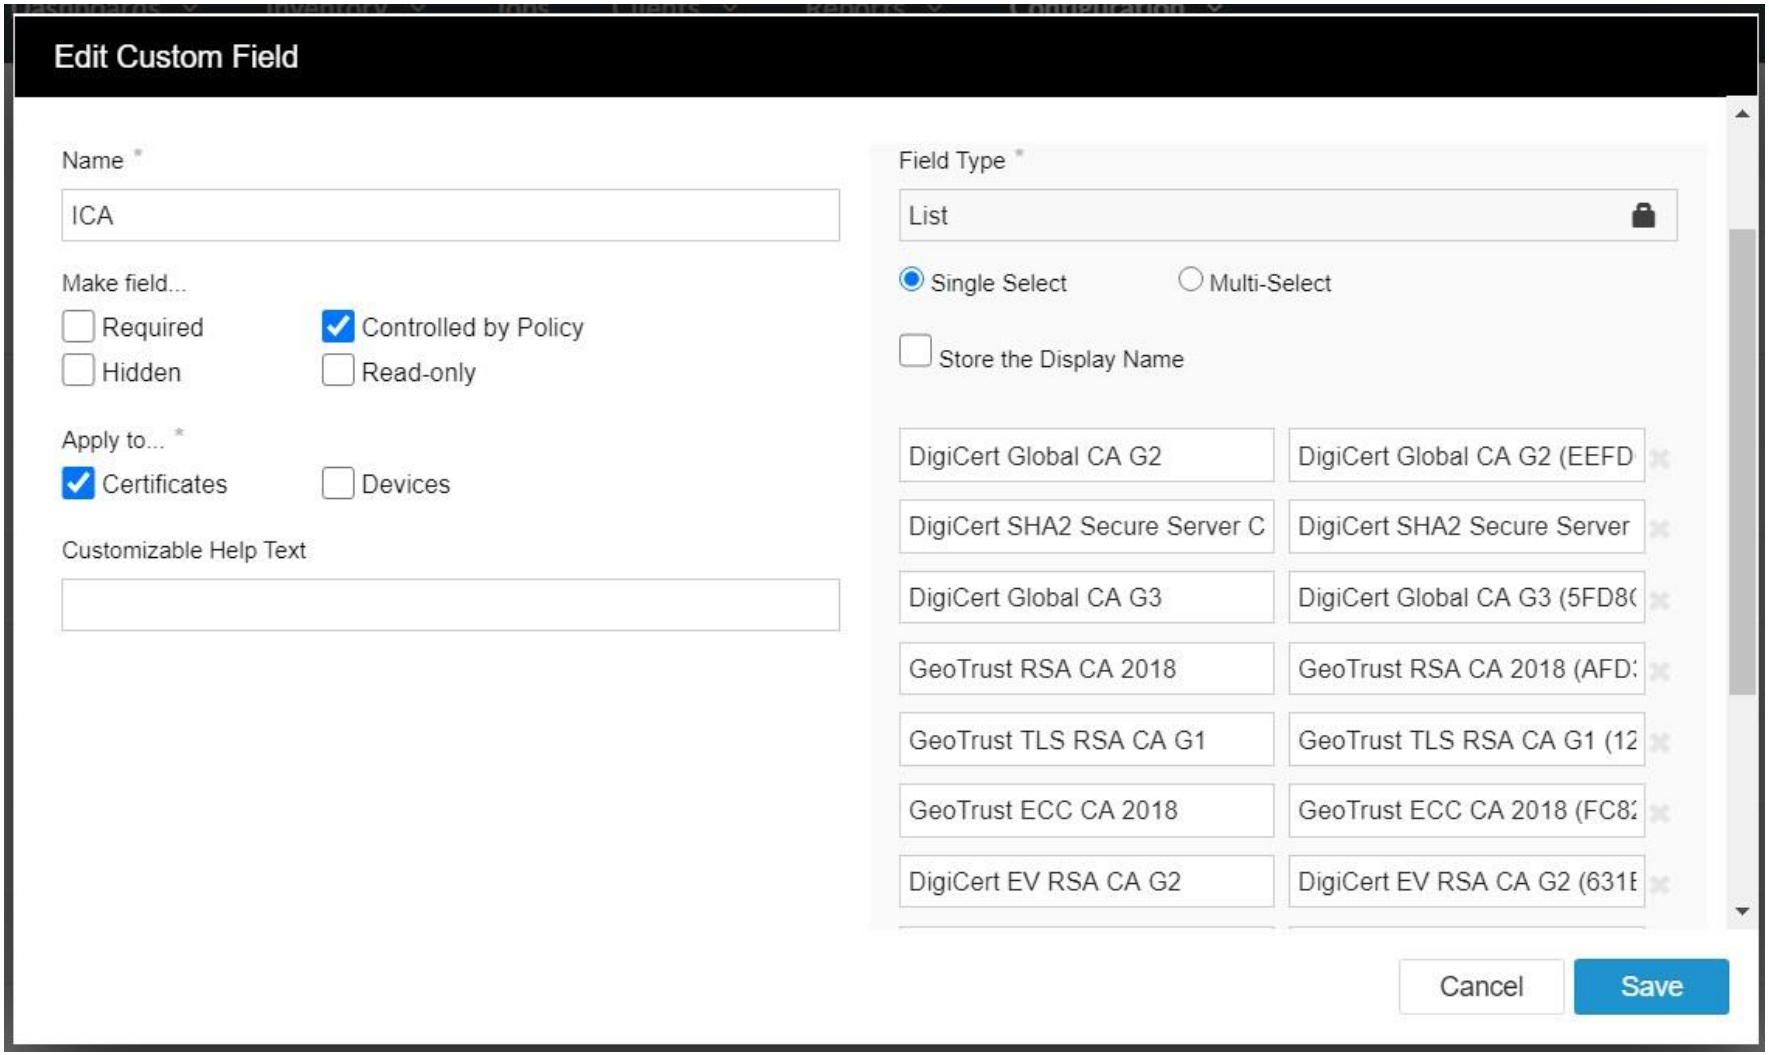


Sample configuration for Server platform custom field

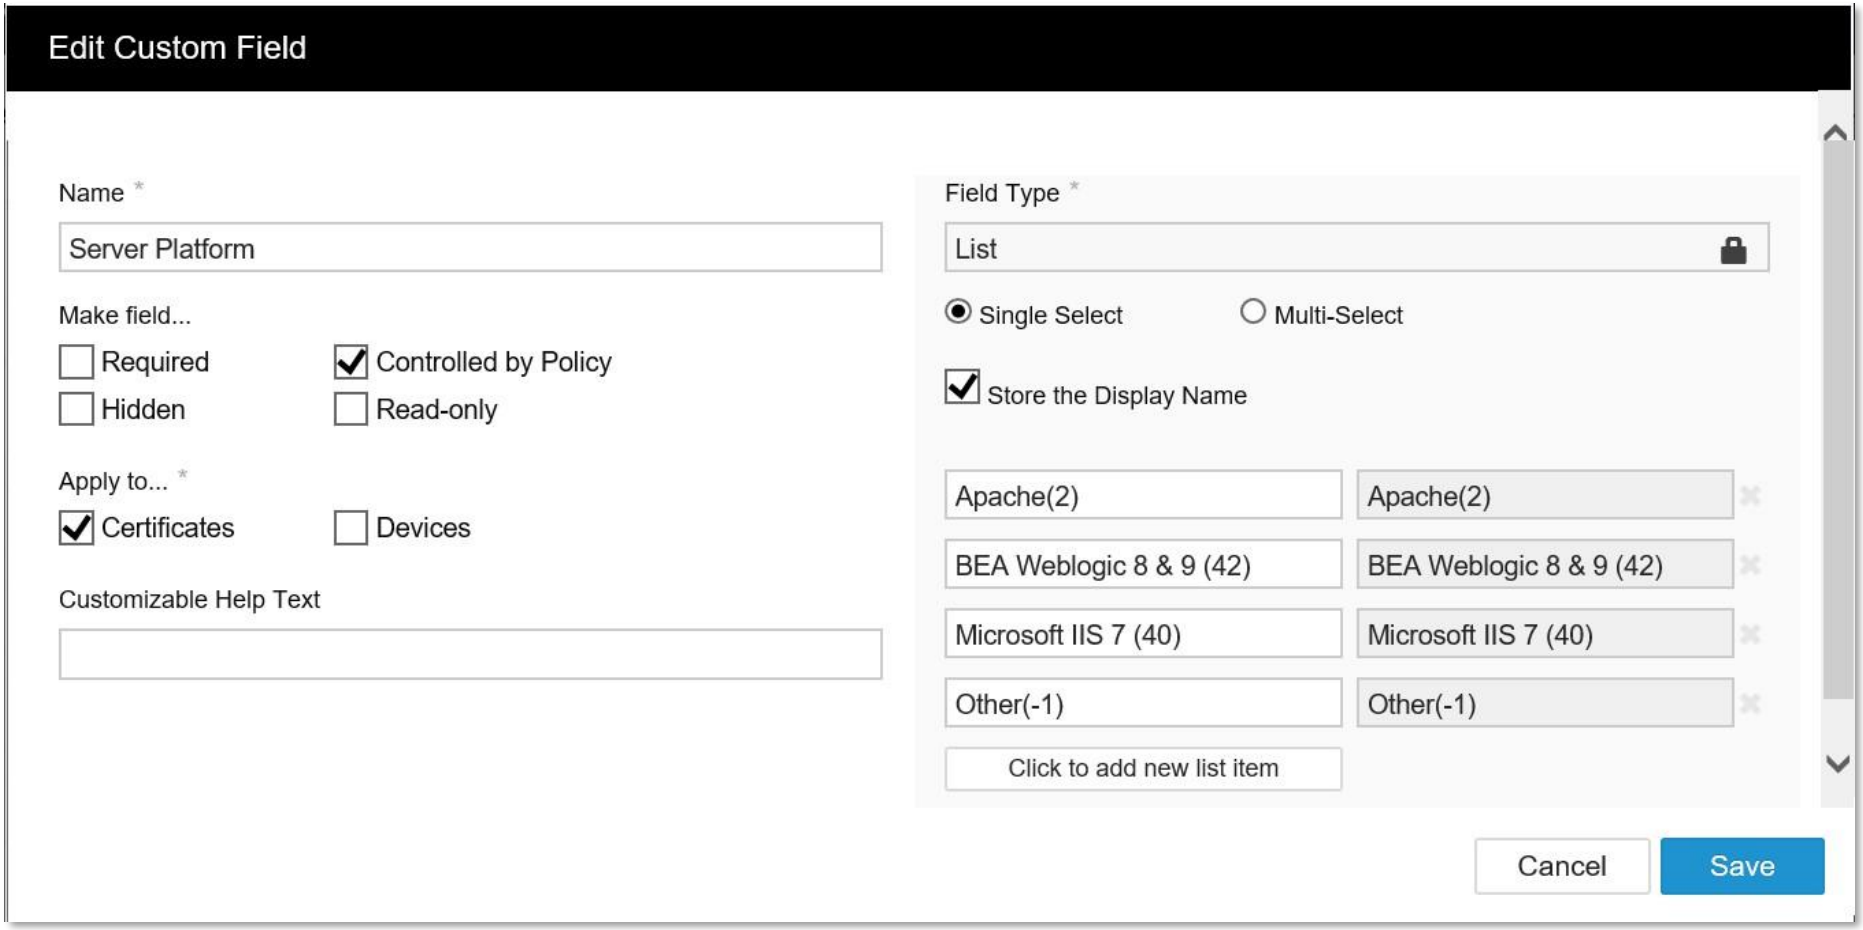


Sample configuration for Organization custom field

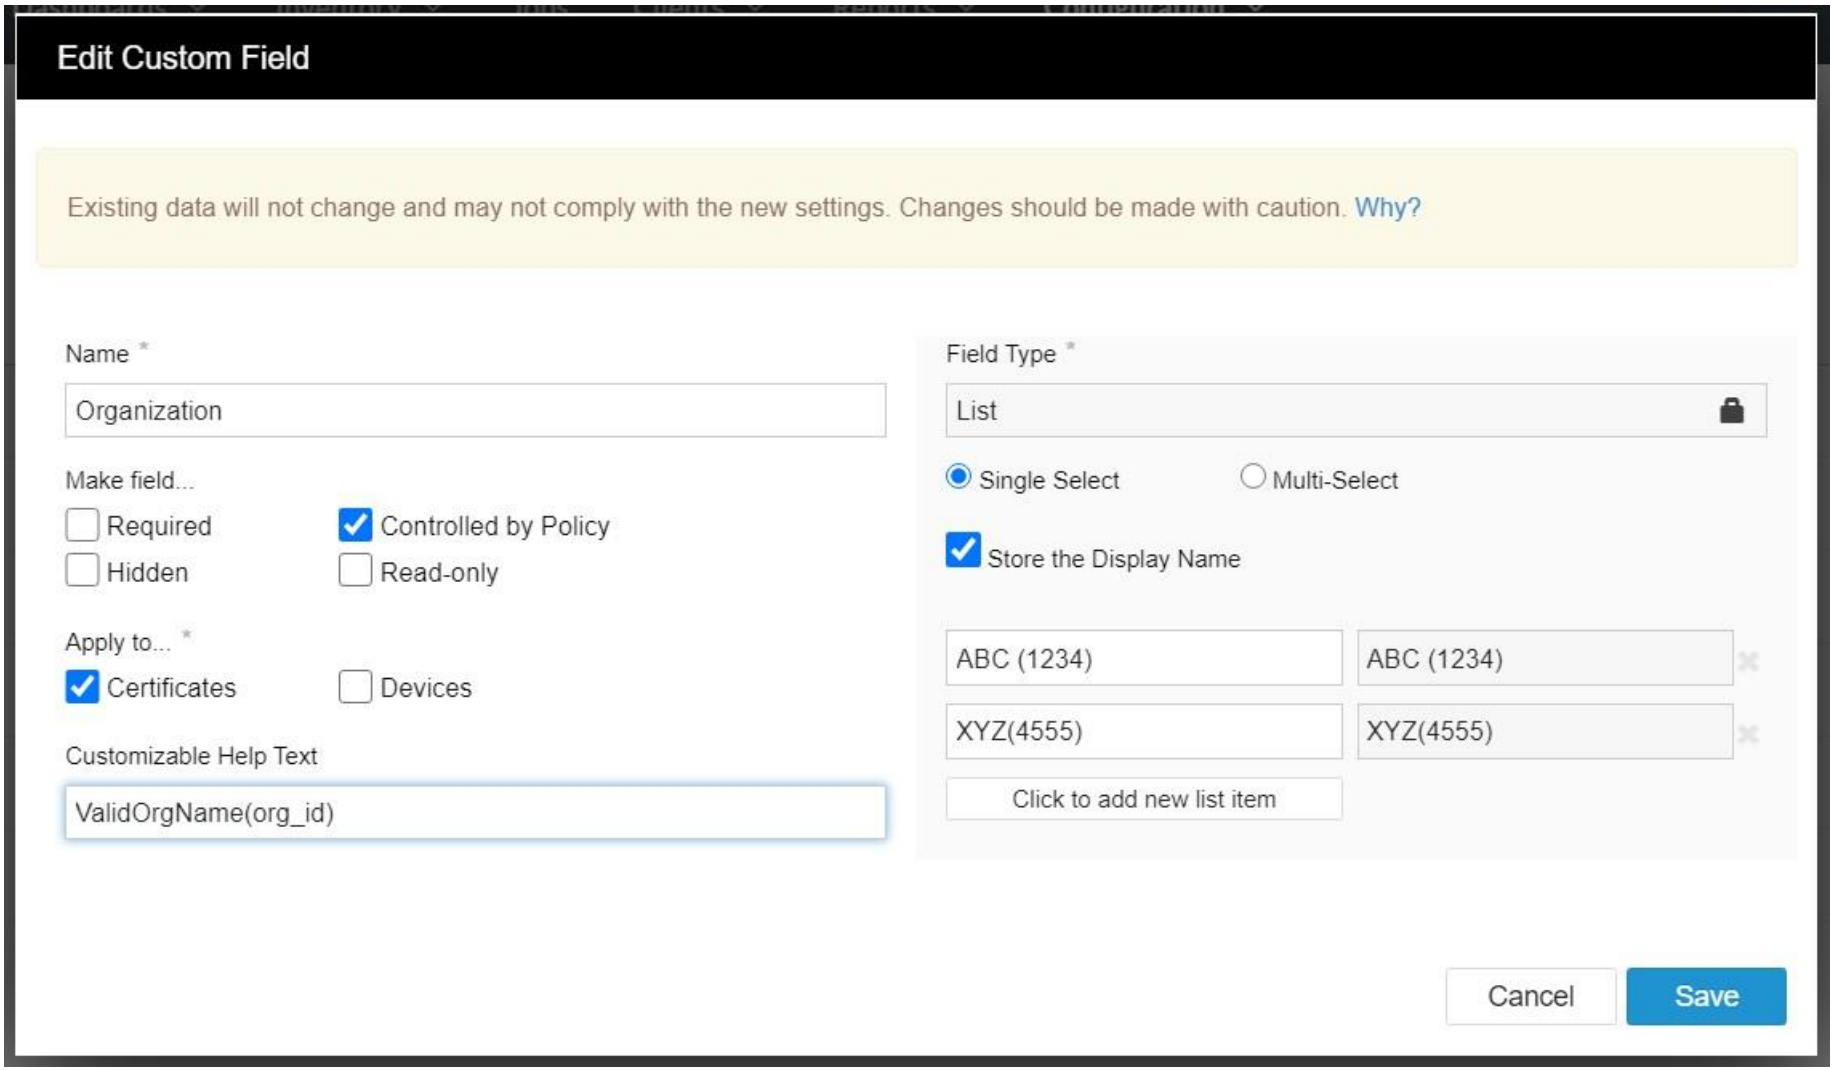

Sample configuration for Division custom field

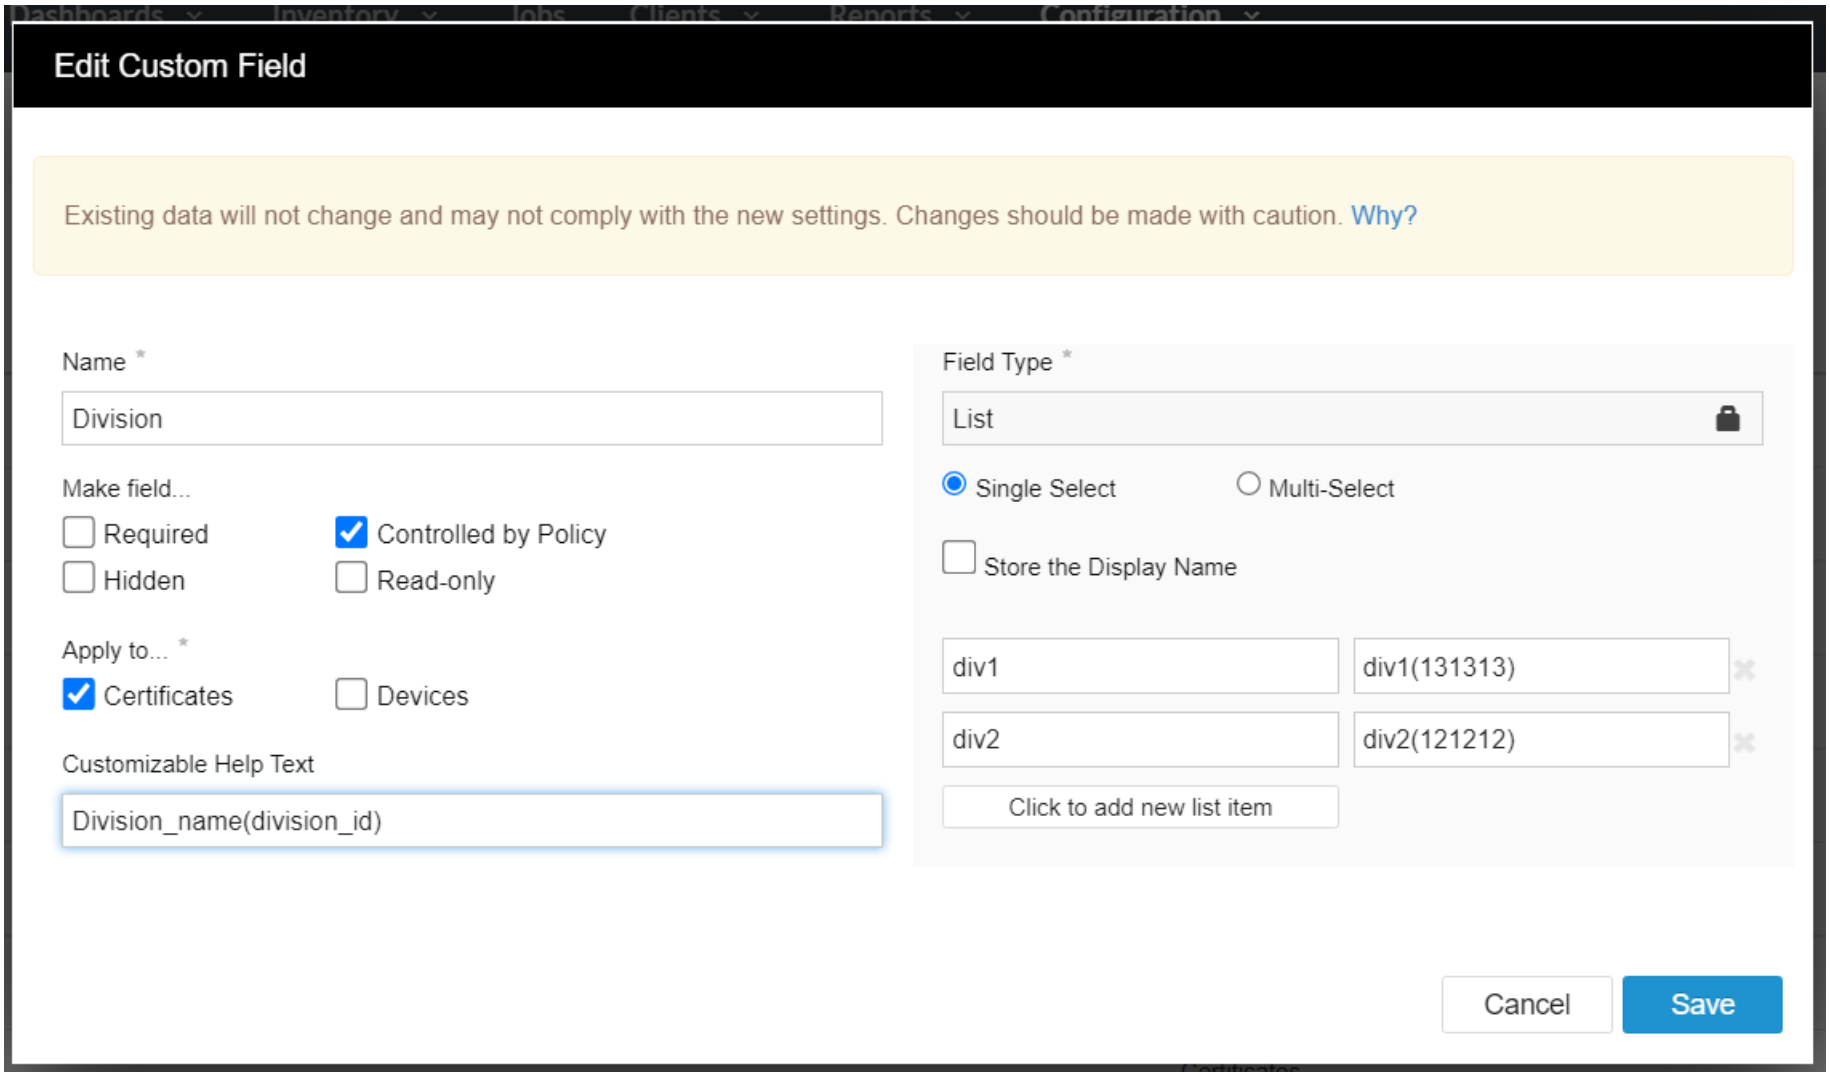

Sample configuration for Order validity years custom field

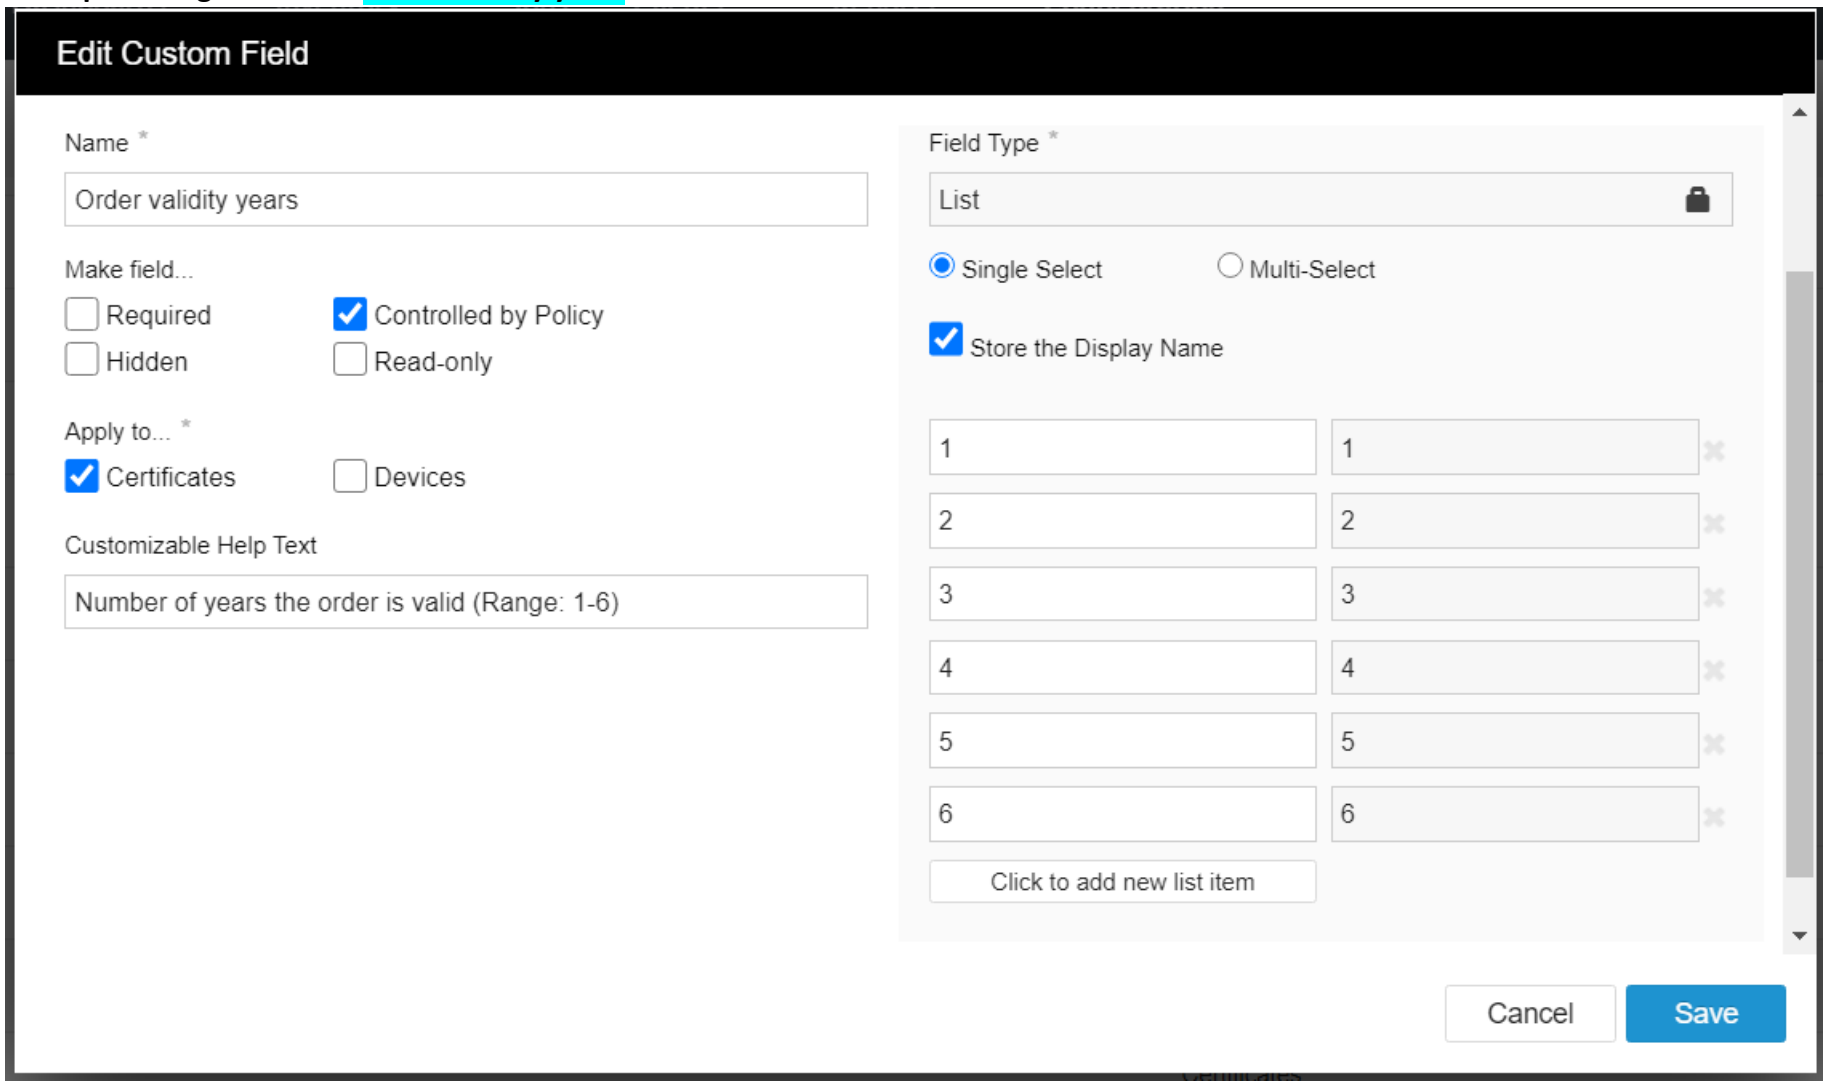


Order validity years custom field has the following fields configured:

Name: Order validity years

Customizable help text: Number of years the order is valid. (Range: 1-6). The number of years must be configured for each account while enabling a multi-year plan.

Field type: List (single select) with values 1 to 6

Sample configuration for Order validity days custom field

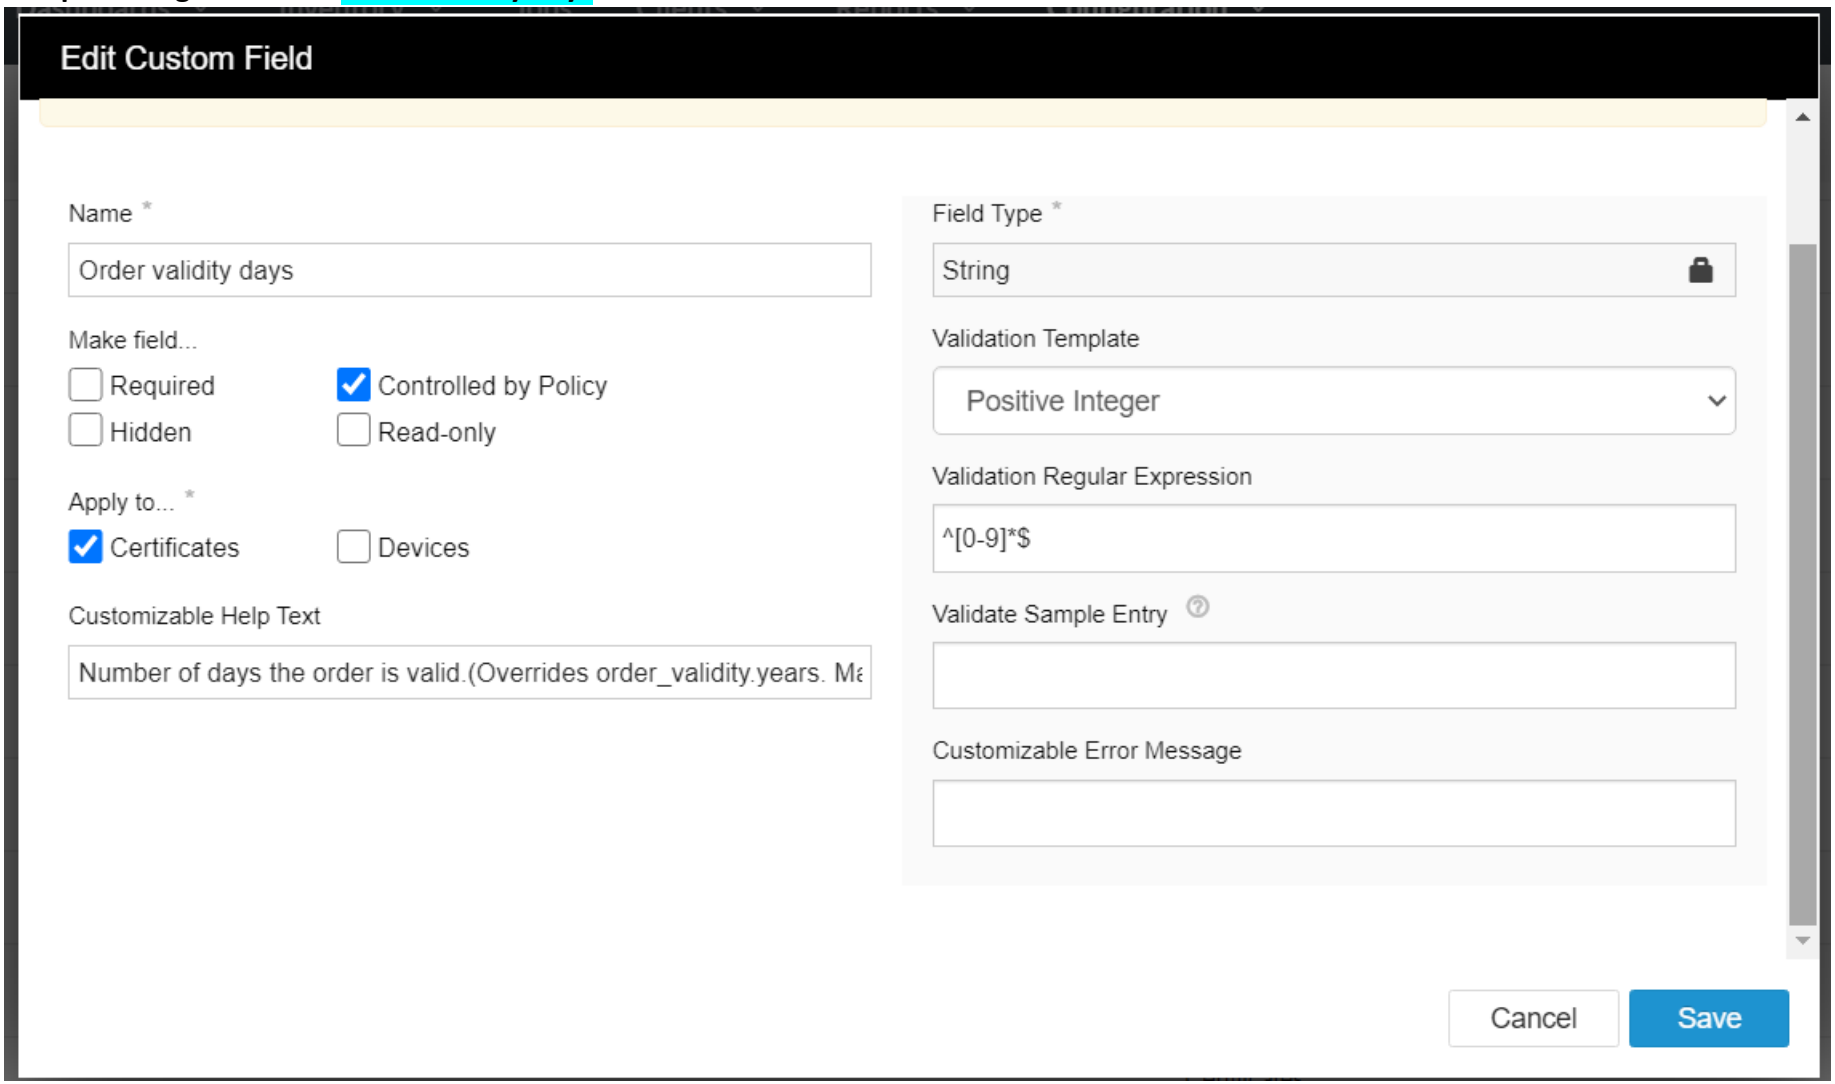

Order validity days custom field has the following fields configured:

Name : Order validity days


Customizable help text: Number of days the order is valid.(Overrides **Order validity years** . Max: 2190)

Field type: String

Validation template: Positive integer

Validation regular expression : ^[0-9]*$

Sample configuration for Order validity custom expiration date custom field

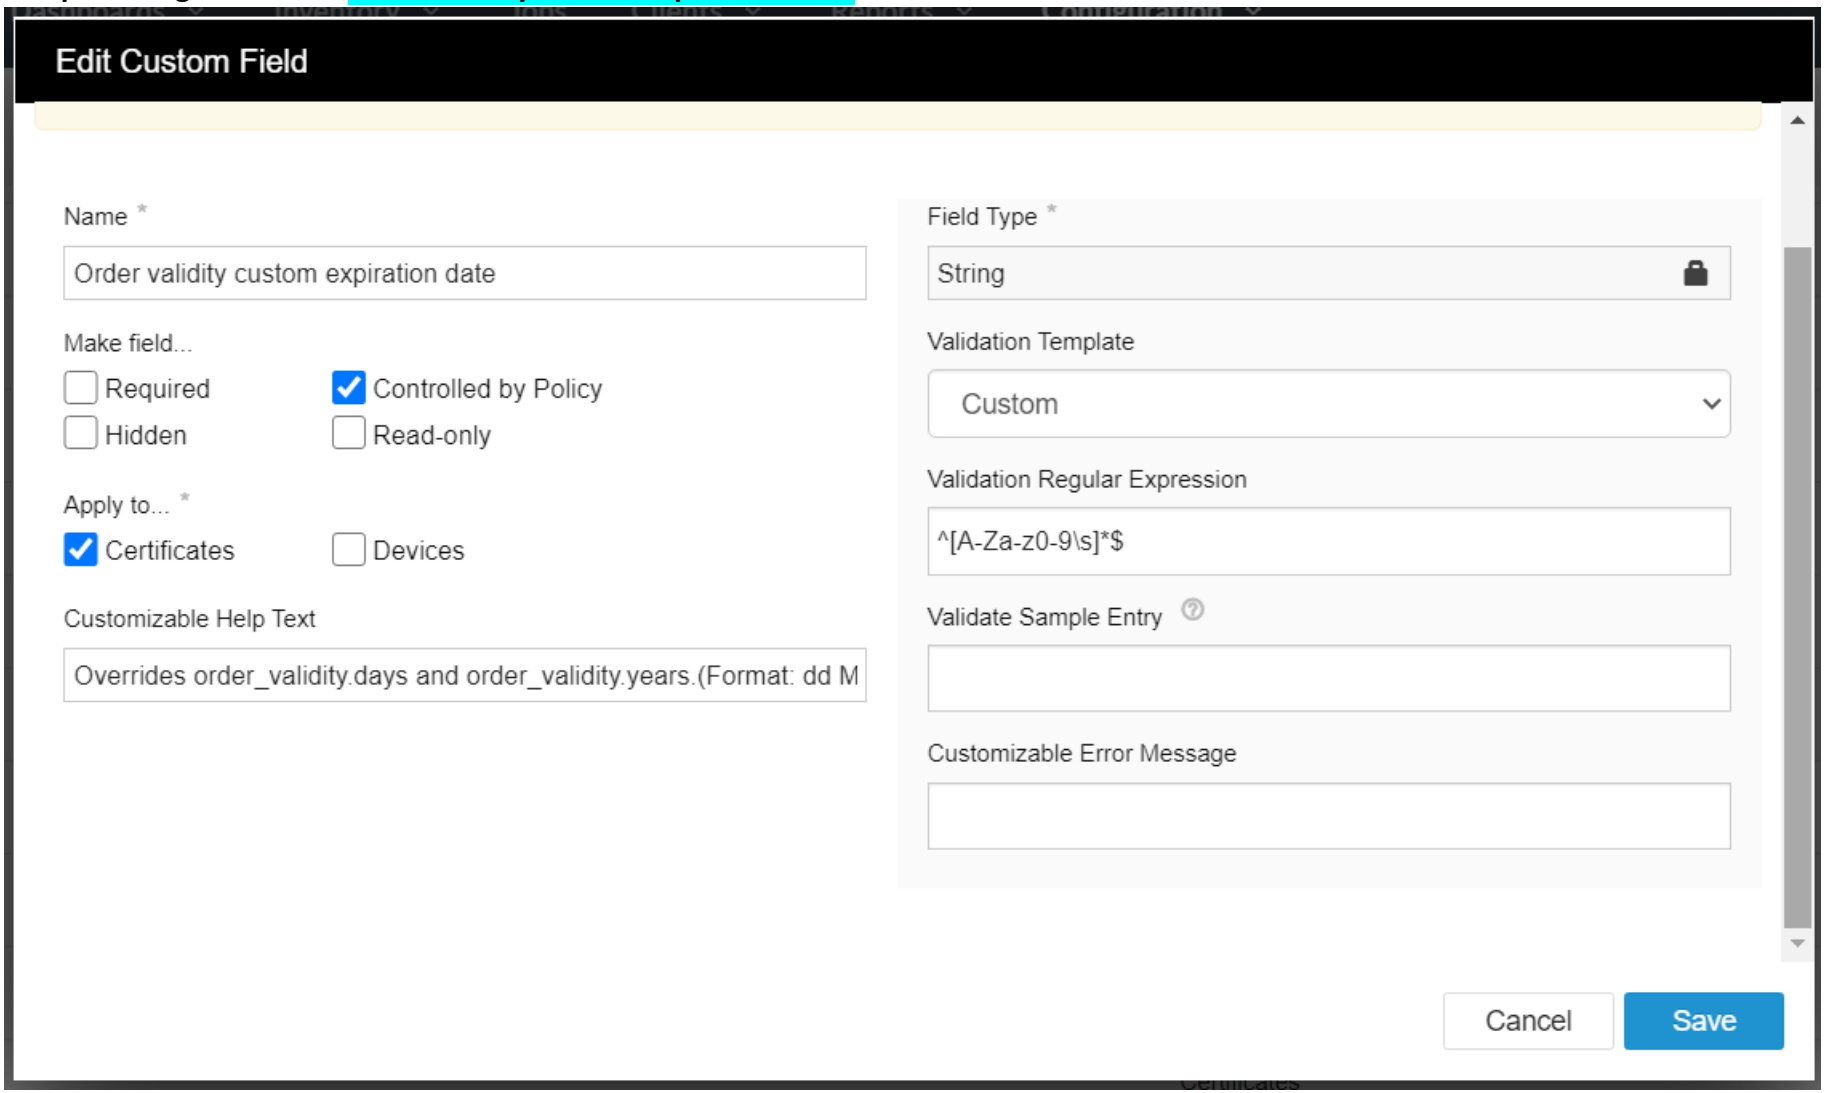

Order validity custom expiration date custom field has the following fields configured:

Name : Order validity custom expiration date


Customizable help text: Overrides **Order validity days** and **Order validity years** . (Format: dd MMM YYYY)

Field type: String

Validation template: Custom

Validation regular expression: ^[A-Za-z0-9\s]*$

Sample configuration for the Cert validity years custom field

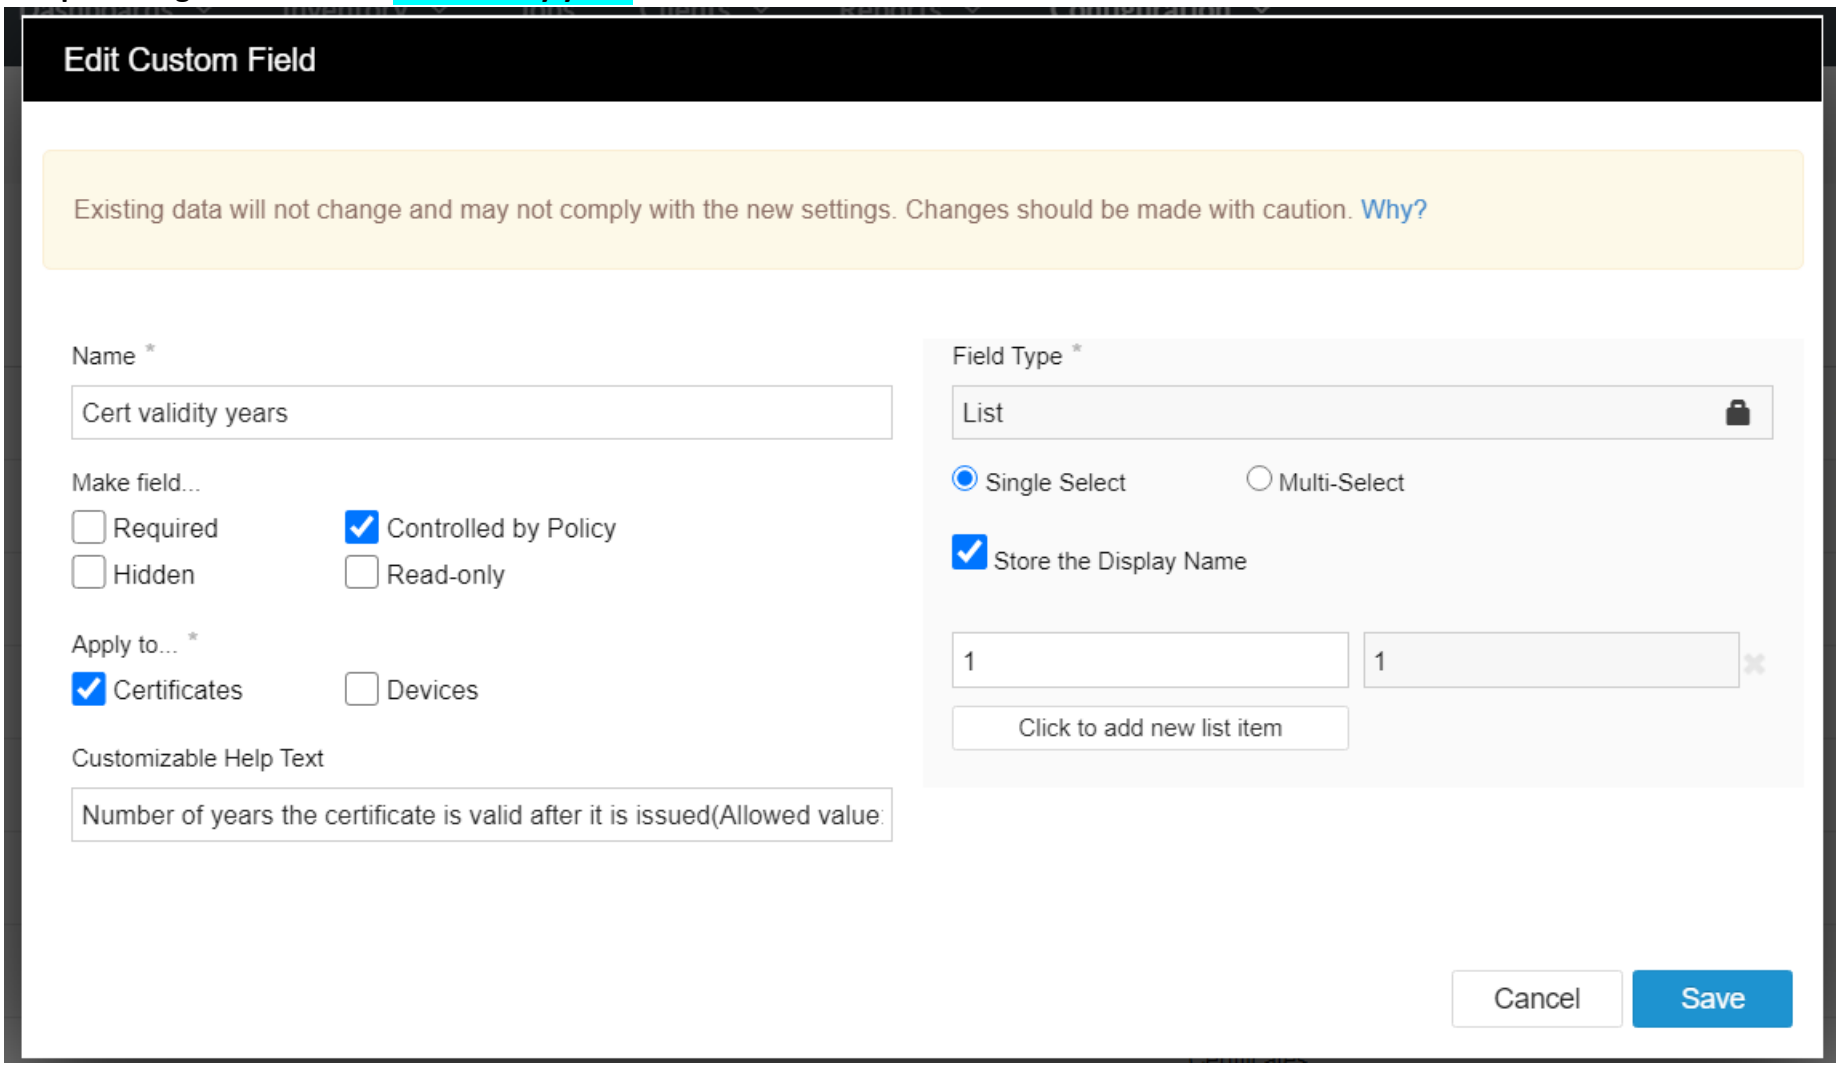


Cert validity years custom field has the following fields configured:

Name: Cert validity years

Customizable help text: Number of years the certificate is valid after it is issued (Allowed value: 1)

Field type: List (single select) with value 1

Sample configuration for the Cert validity days custom field

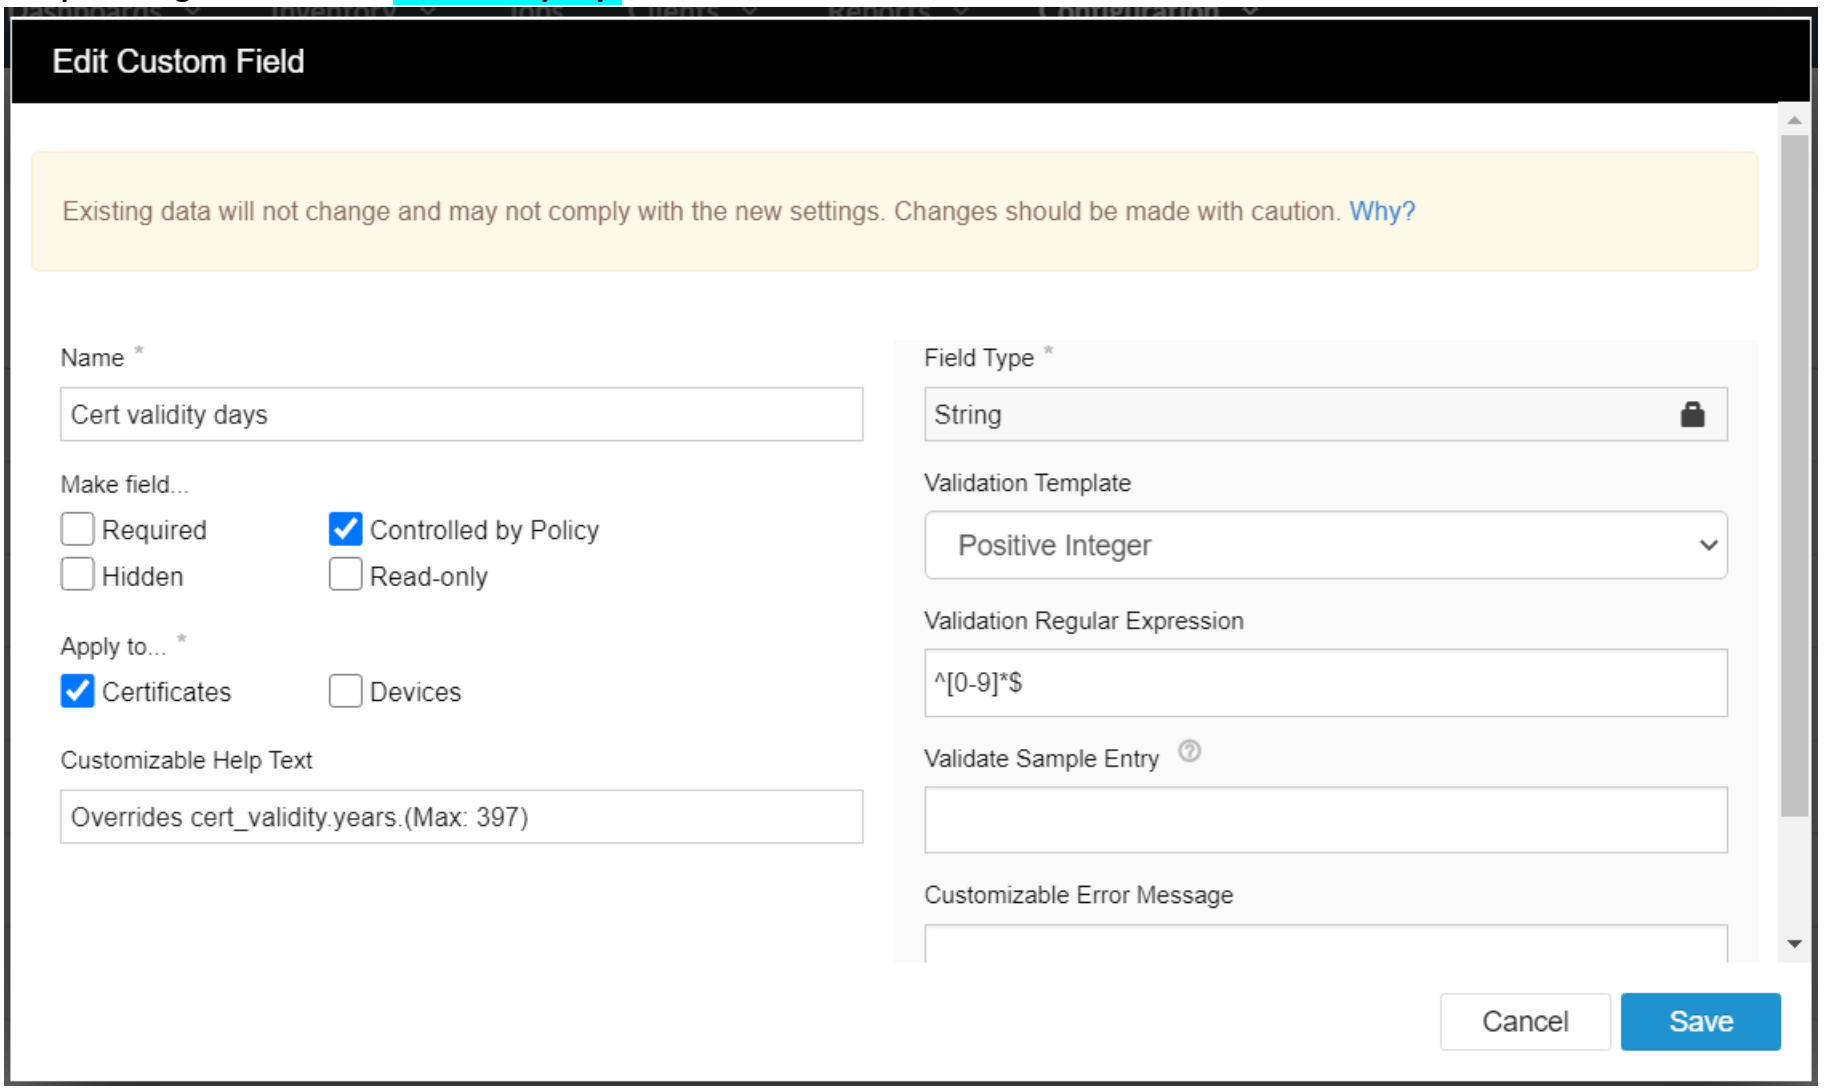

Cert validity days custom field has the following fields configured:

Name: Cert validity days


Customizable help text: Overrides **Cert validity years**. (Max: 397)

Field type: String

Validation template: Positive integer

Validation regular expression: ^[0-9]*$

Sample configuration for the Cert validity custom expiration date custom field

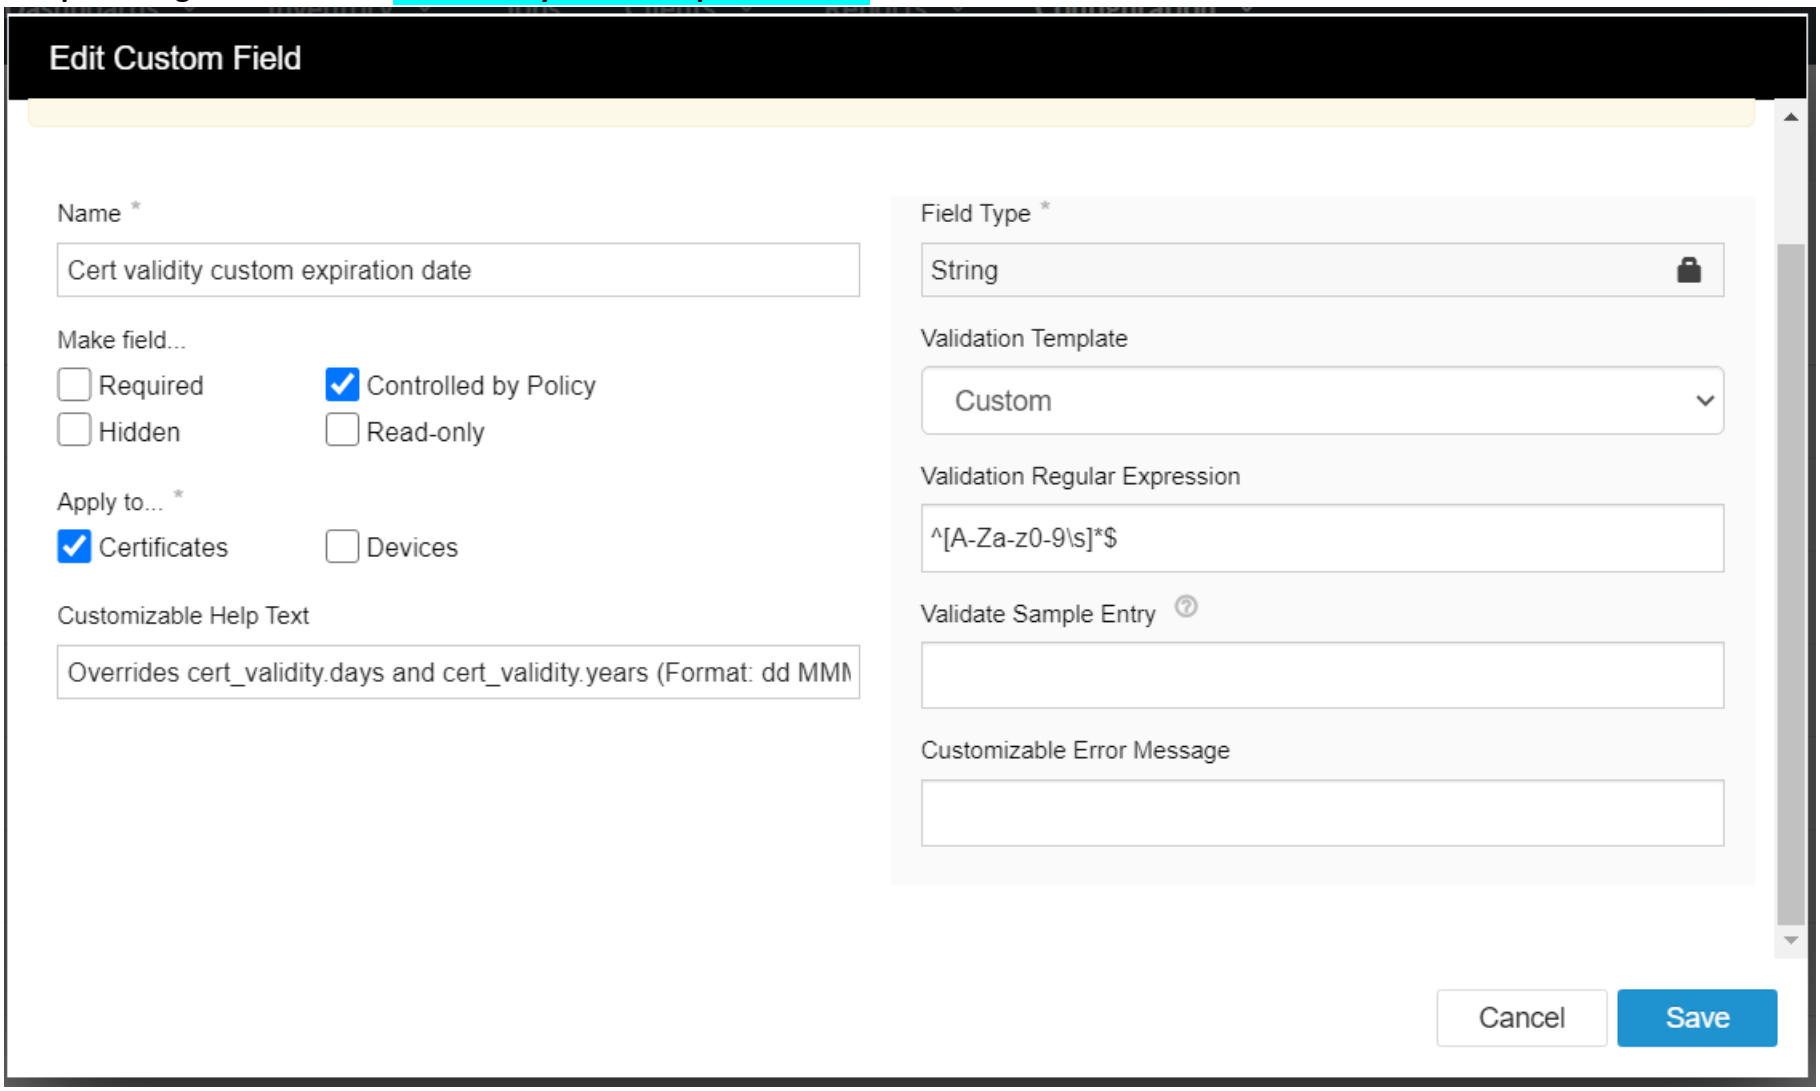

Cert validity custom expiration date custom field has the following fields configured:

Name: Cert validity custom expiration date


Customizable help text: Overrides **Cert validity days** and **Cert validity years** (Format: dd MMM YYYY)

Field type: String


Validation template : Custom

Validation regular expression : ^[A-Za-z0-9\s]*$


Sample configuration for the Code signing provisioning method custom field

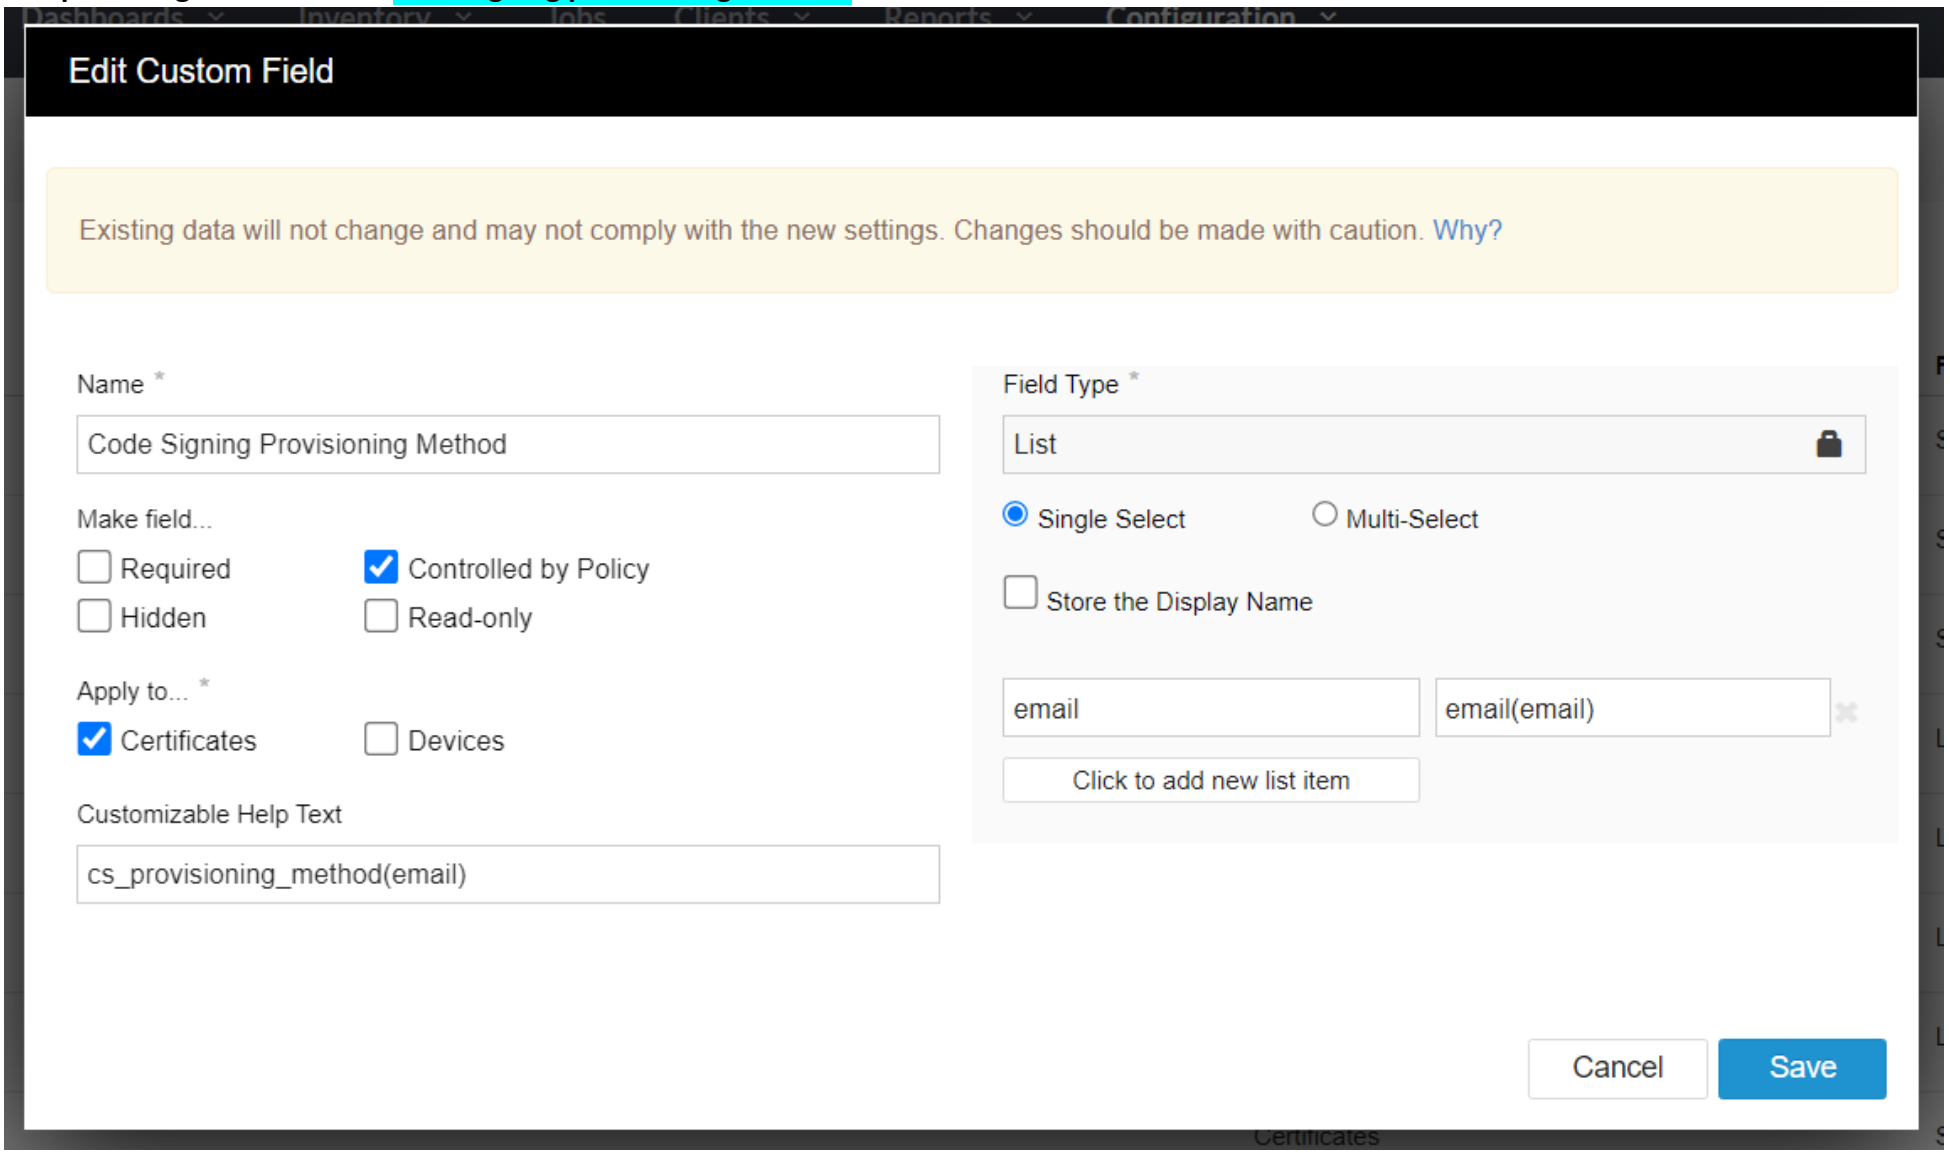

Sample configuration for the Server licenses custom field

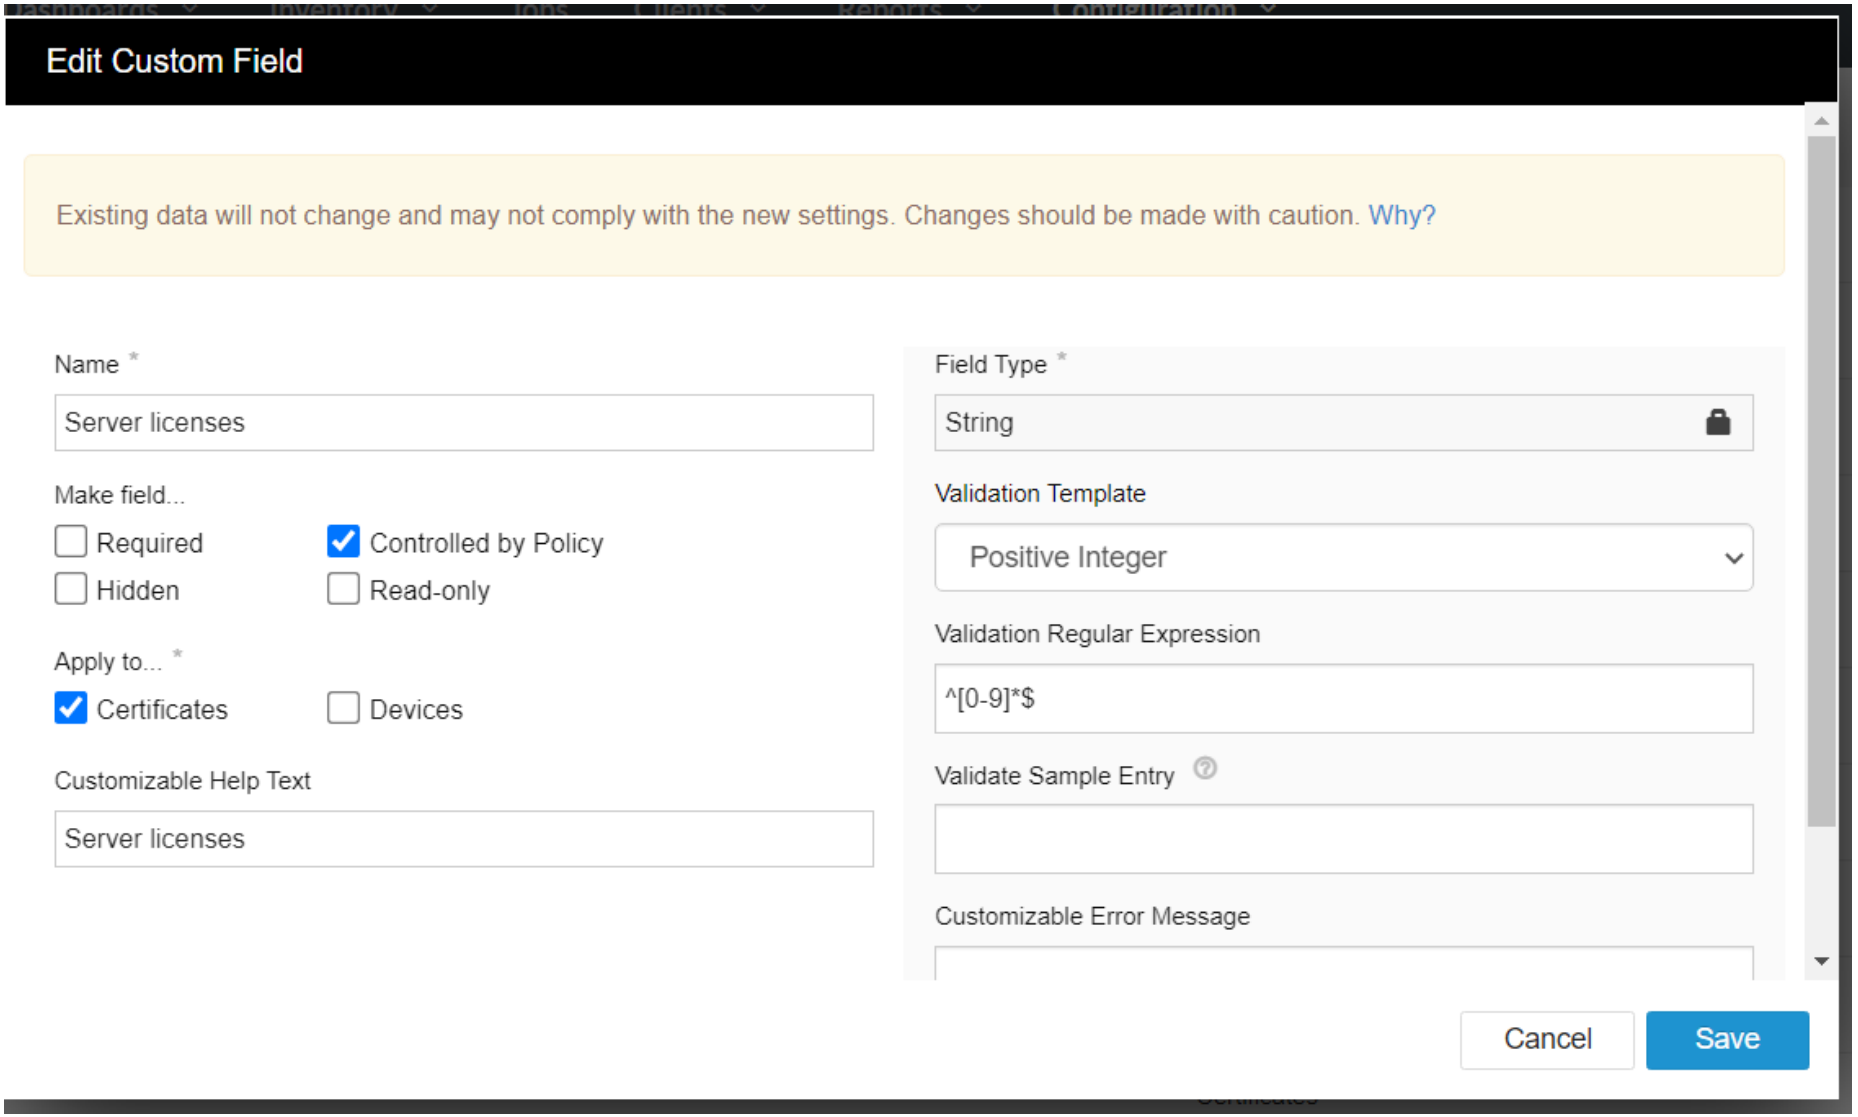

Sample configuration for the Profile option custom field

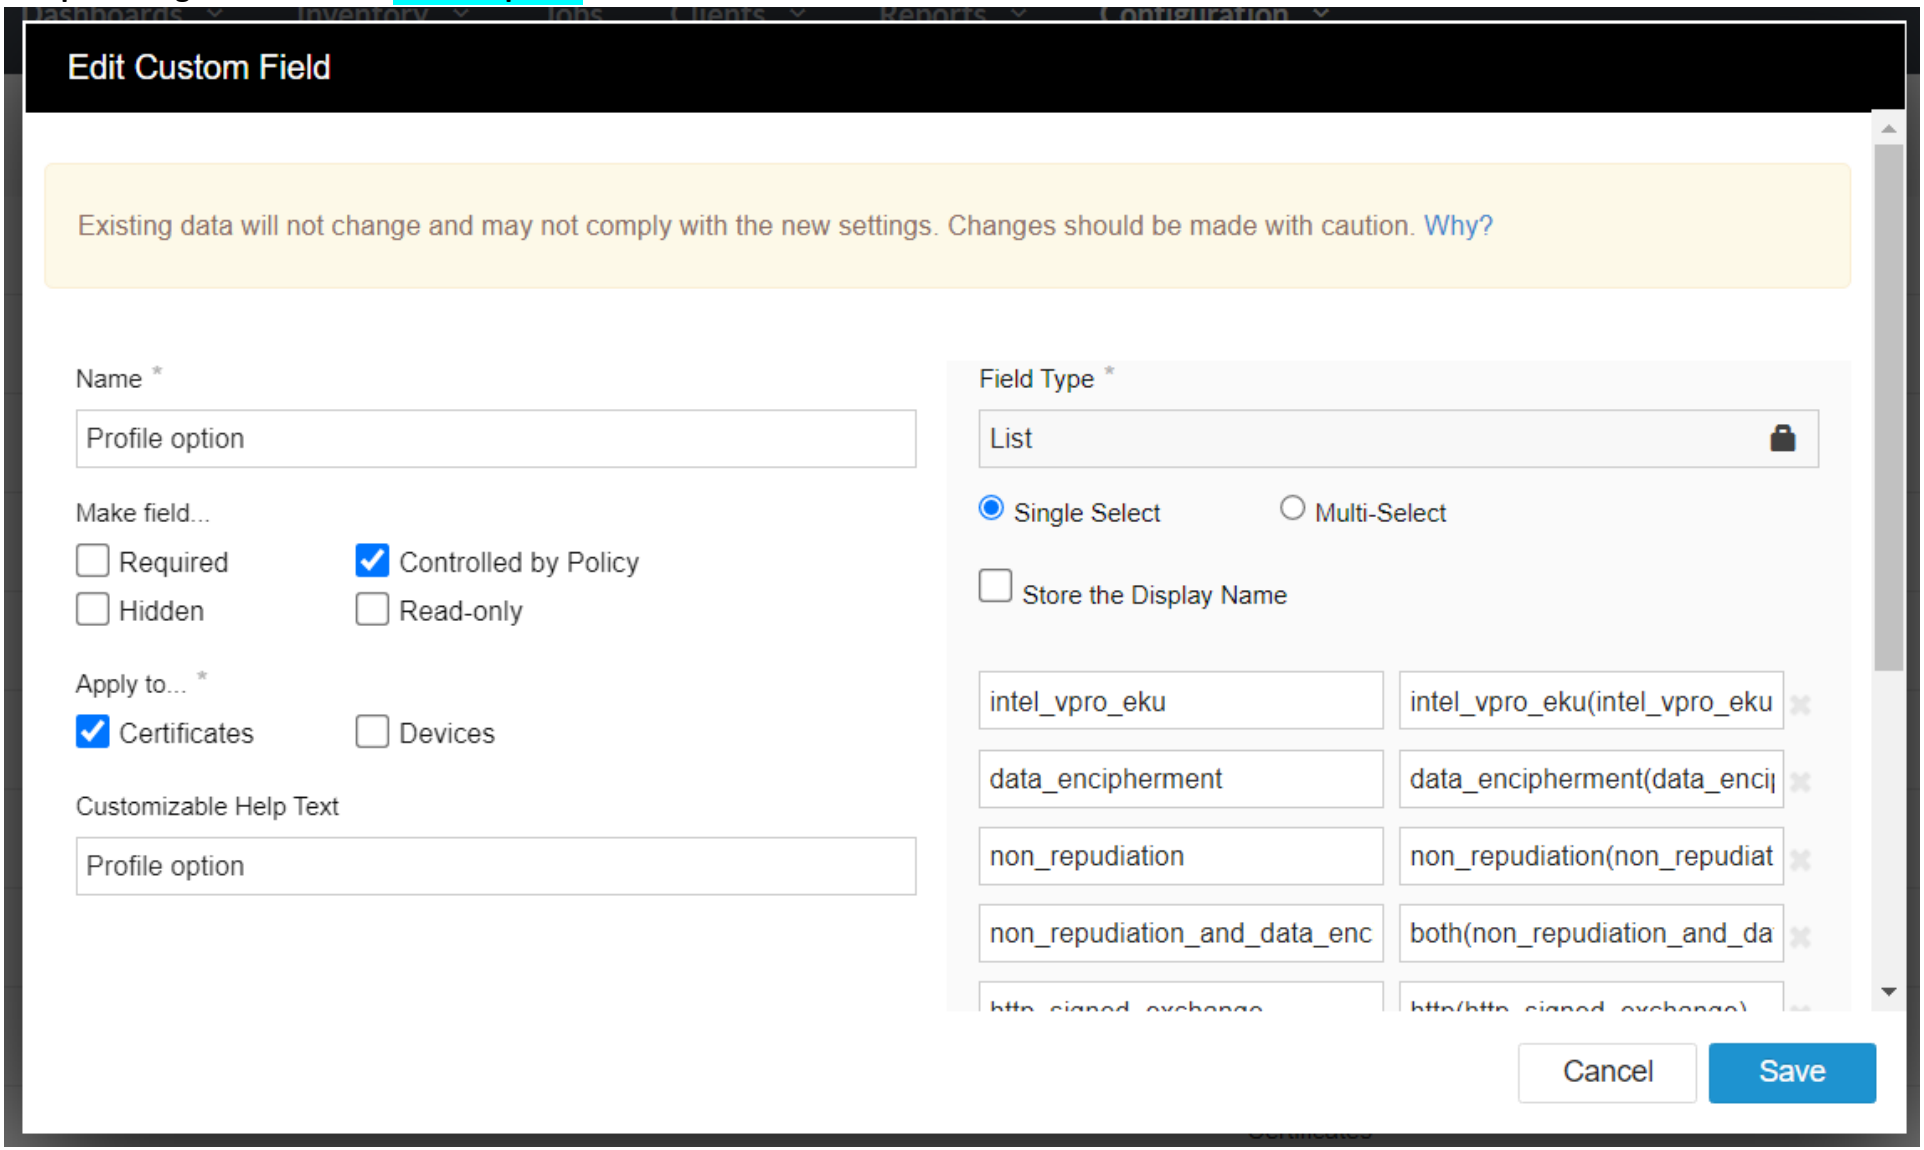

Guidelines for configuring custom fields

- The custom field values provided in brackets are parsed by the script and used appropriately in API calls.
- The custom field values provided in brackets should not have any leading or trailing spaces.
- The parameters passed in custom fields through the script will override $global parameters in the script.
- The parameters passed as custom fields need to be configured only in TPP and not in your CertCentral account.
- Regular CertCentral account-level custom fields should also be configured in TPP.
- Additional properties such as additional emails, proxy, and so on can be configured in script, where parameters are defined between "START global configuration" and "END global configuration".
- Supported minimum versions of PowerShell and .NET are listed in this document.

Reference URLs to configure new values in Product, ICA, Division, Locale, Server Platform, or Code Signing Provisioning Method

Custom field	Field Type	Value	Example	Reference
Product	List	<products.name> (<products.name_id>)	Secure Site EV SSL (ssl_ev_securesite)	Use CC API to get the product list https://www.digicert.com/services/v2/product
ICA	List	<intermediates.subject_common_name> (<intermediates.id>)	DigiCert SHA2 Secure Server CA (BFF28BD4075C8D9A)	Use CC API to get the ICA list https://www.digicert.com/services/v2/certificate/intermediates
Division	List	<containers.name> (<containers.id>)	Test Container (12345)	Use CC API to get the divisions https://www.digicert.com/services/v2/container
Locale	List	<language> (<code>)	English (en)	https://dev.digicert.com/glossary/#locale-codes
Server Platform	List	<platform> (<id>)	Apache (2)	https://dev.digicert.com/glossary/#server-platforms
Organization	List	<organizations.name> (<organizations.id>)	Test Organization (12345)	Use CC API to get the organizations https://www.digicert.com/services/v2/organization

Custom field	Field Type	Value	Example	Reference
Order validity years	List	<1-6>	1	Number of years the order is valid. (Range: 1-6)
Order validity days	String	<Positive Integer>	1000	Number of days the order is valid. (Overrides order_validity.years. Max: 2190)
Order validity custom expiration date	String	<Format: dd MMM YYYY>	10 MAY 2021	Overrides order_validity.days and order_validity.years. (Format: dd MMM YYYY)
Cert validity years	List	<1>	1	Number of years the certificate is valid after it is issued. (Allowed value: 1)
Cert validity days	String	<Positive Integer>	300	Overrides cert_validity.years. (Max: 397)
Cert validity custom expiration date	String	<Format: dd MMM YYYY>	10 MAR 2021	Validation template: Custom Validation regular expression: ^[A-Za-z0-9\s]*$
Code Signing Provisioning Method	List	<provisioning method> (<provisioning_method_name>)	Email(email)	To configure email as provisioning method: https://dev.digicert.com/glossary/#Provisioning%20methods
Server licenses	String	<Positive Integer>	5	The number of server licenses you need for the certificate. Default: 1. Each additional server license incurs an extra cost. https://dev.digicert.com/services-api/orders/order-secure-site-ov/

Custom field	Field Type	Value	Example	Reference
Profile option	List	<Profile option>(<Profile option name>)	intel_vpro_eku(intel_vpro_eku)	To configure certificate profile options: https://dev.digicert.com/glossary/#certificate-profile-options

Custom field configuration for Private SSL products

Product Name	Validity
Order Private SSL	order_validity Defines the validity period of the certificate and order. More on configuring order validity: https://dev.digicert.com/services-api/orders/order-private-ssl/

Custom field configuration for Code Signing products

NOTE: If you provision a code signing certificate using `email` or `client_app`, you must have a supported hardware token or a FIPS 140-2+ Level 2 or Common Criteria EAL4+ compliant HSM that supports ECC P-256 or RSA 3072-bit key sizes or larger. If you don't have a compatible hardware token or HSM, you will not be able to install the certificate on your device.

Product Name	Code Signing Provisioning Method	Server platform id	Validity	CSR
code_signing_ev	<provisioning method> (<email >) TPP custom field name: Code Signing Provisioning Method For example, Code Signing Provisioning Method (email) https://dev.digicert.com/en/certcentral-apis/services-api/glossary.html#provisioning-methods	Use the server platform ID available at https://dev.digicert.com/en/certcentral-apis/services-api/glossary.html#code-signing-and-ev-code-signing-hardware-platforms for code_signing_ev lifecycle operations.	<order_validity> Defines the validity period of the certificate and order. More on configuring order validity: https://dev.digicert.com/services-api/orders/order-code-signing-certificate/	With CSR
code_signing	<provisioning method> (<email >) TPP custom field name: Code Signing Provisioning Method For example, Code Signing Provisioning Method (email) https://dev.digicert.com/en/certcentral-apis/services-api/glossary.html#provisioning-methods	Use the server platform ID available at https://dev.digicert.com/en/certcentral-apis/services-api/glossary.html#code-signing-and-ev-code-signing-hardware-platforms for code_signing operations. Starting May 16, browser-based key generation and certificate installation will no longer be valid for code_signing certificates. These server platform IDs (https://dev.digicert.com/en/certcentral-apis/services-api/glossary.html#code-signing-server-platforms) will be converted to (-1) in the API request starting May 16.	<order_validity> Defines the validity period of the certificate and order. More on configuring order validity: https://dev.digicert.com/services-api/orders/order-code-signing-certificate/	With CSR

Product Name	Code Signing Provisioning Method	Server platform id	Validity	CSR

Supported minimum versions of PowerShell and .NET required for running the adaptable PowerShell script version 1.4.0 and later.

TPP version	OS version	PowerShell version	.NET version	Result of all lifecycle operations (Enroll-Replace-Renew-Revoke)
20.2.1.5550	Windows Server 2019 Standard (64-Bit)	5.1.17763.1852	4.7.03190	**PASS**
19.4.4.4199	Windows Server 2012 Standard (64-bit)	5.1.14409.1005	4.7.03062	**PASS**
19.4.4.4199	Windows Server 2016 Standard (64-bit)	5.1.14393.4402	4.7.03062	**PASS**
19.4.5.4270	Windows Server 2012 R2 (64-Bit)	5.1.14409.1005	4.8.03761	**PASS**


Products supported from the Venafi script.

Name ID	Group name	Name
ssl_securesite_pro	securesite_ssl_certificate	Secure Site Pro SSL
ssl_ev_securesite_pro	securesite_ssl_certificate	Secure Site Pro EV SSL
ssl_securesite	securesite_ssl_certificate	Secure Site SSL
ssl_securesite_multi_domain	securesite_ssl_certificate	Secure Site Multi-Domain SSL


ssl_securesite_wildcard	securesite_ssl_certificate	Secure Site Wildcard SSL
ssl_ev_securesite	securesite_ssl_certificate	Secure Site EV SSL
ssl_ev_securesite_multi_domain	securesite_ssl_certificate	Secure Site EV Multi-Domain SSL
ssl_securesite_flex	securesite_ssl_certificate	Secure Site OV
ssl_ev_securesite_flex	securesite_ssl_certificate	Secure Site EV
ssl_plus	ssl_certificate	Standard SSL Certificate
ssl_multi_domain	ssl_certificate	SSL Multi Domain Certificates
ssl_wildcard	ssl_certificate	Wildcard Certificate
ssl_ev_plus	ssl_certificate	EV SSL Certificate
ssl_ev_multi_domain	ssl_certificate	SSL EV Multi Domain Certificate
ssl_basic	ssl-certificate	Basic OV
ssl_ev_basic	ssl-certificate	Basic EV
ssl_thawte_webserver	ssl_certificate	Thawte SSL Webserver OV
ssl_ev_thawte_webserver	ssl_certificate	Thawte SSL Webserver EV
ssl_geotrust_truebizid	ssl_certificate	GeoTrust TrueBusiness ID OV
ssl_ev_geotrust_truebizid	ssl_certificate	GeoTrust TrueBusiness ID EV
code_signing	code_signing_certificate	Code Signing Certificate
code_signing_ev	code_signing_certificate	EV Code Signing Certificate

Configuring DigiCert API key in username credential object:

- Right-click **Policy → Add → Credential → Username Credential**.

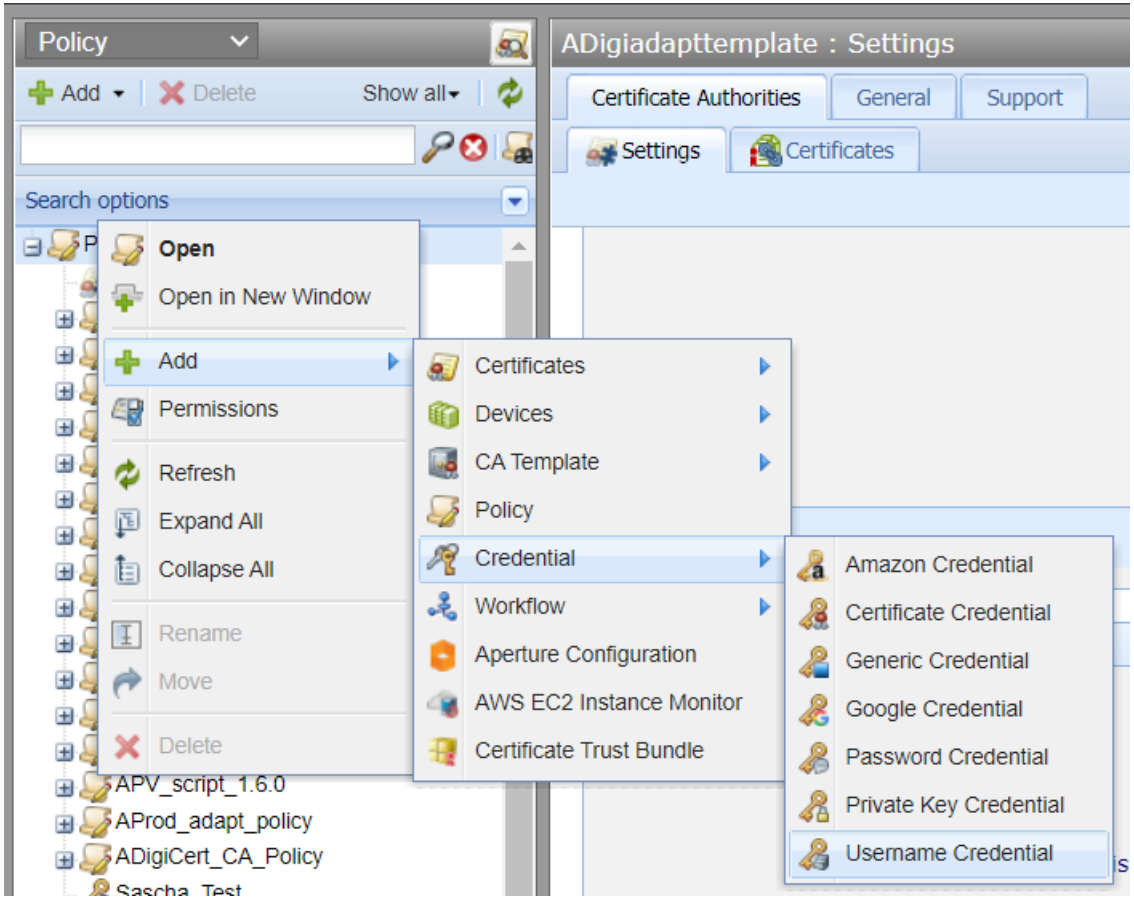

- User **Credential**:
    - In the **User Name** field, enter the CertCentral account username.
    - In the **Password** field, enter the API key.
    - In the **Confirm Password** field, enter the API key again.

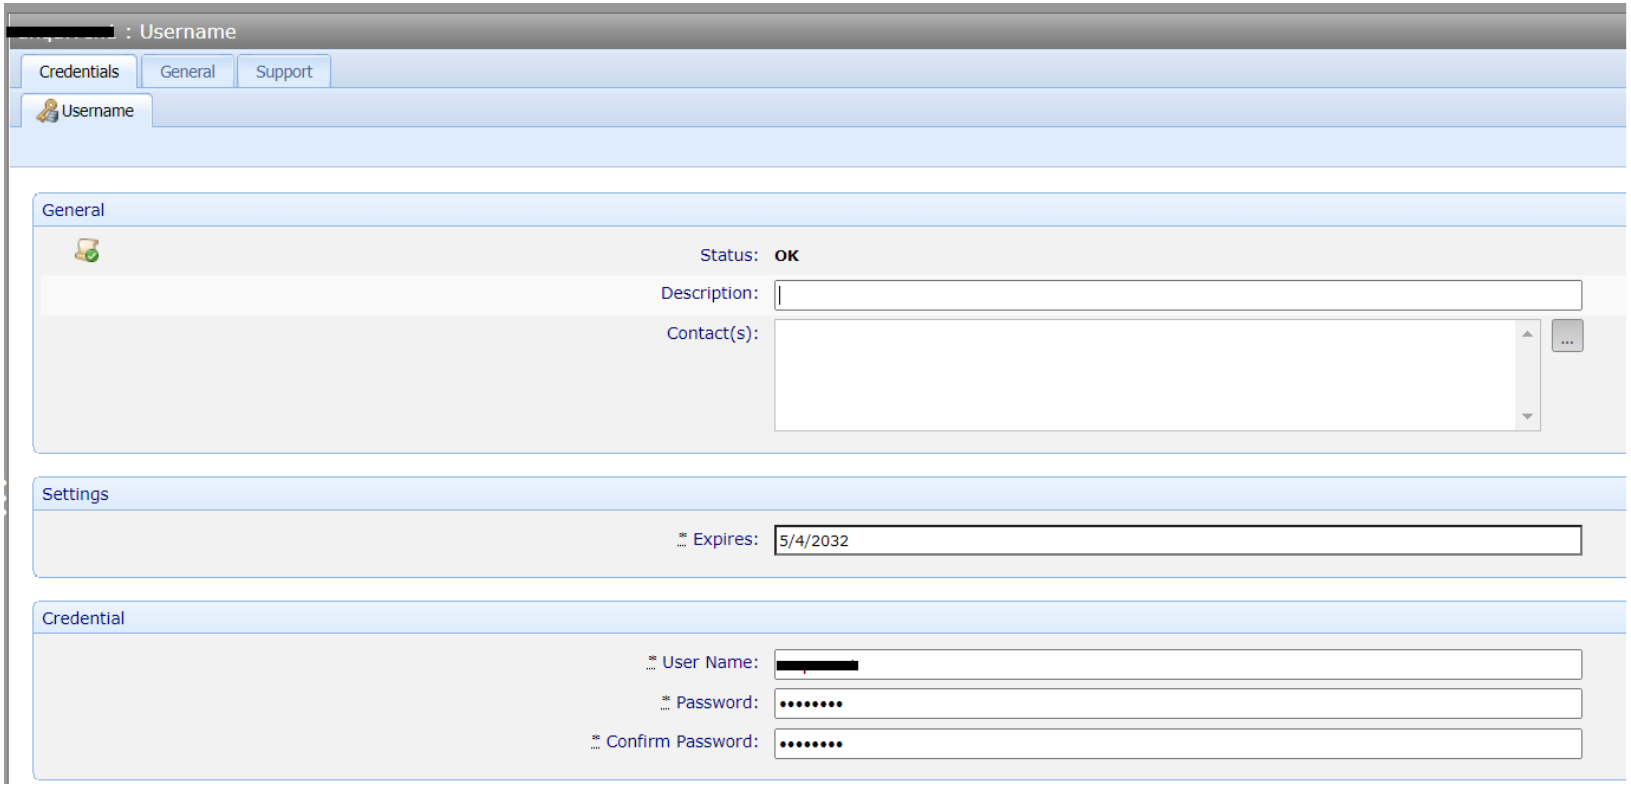

Service address field of TPP

The adaptable script supports using the URL provided by the customer in this field.

