C programming-8

Adit Pandey

September 2025

1 dollars into rupees

```
    #include <stdio.h>

int main()
{
    float dollars, rupees;
    float rate = 48

    printf("Enter amount in Dollars: ");
    scanf("%f", &dollars);

    rupees = dollars * rate;

    printf("%.2f Dollar(s) = %.2f Rupees\n", dollars, rupees);

    return 0;
```
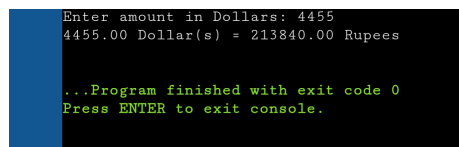

Figure 1: Enter Caption